

FUNCTIONAL SAFETY CERTIFICATE

This is to certify that the

Proximity switch models: 10 & 20 Series

manufactured by

Topworx, Inc.
3300 Fern Valley Road
Louisville
Kentucky 40213
USA

has been assessed by Sira Certification Service with reference to the CASS methodologies and found to meet the requirements of

IEC 61508-2:2010

The product and its associated data contained herein can be considered for use in the design of safety functions up to and including

SIL 2*

When used in accordance with the scope and conditions of this certificate

* The product that has been certified is not implicit of the achieved Safety Integrity Level (SIL) of the safety related system

Certification Manager:



Wayne Thomas
Certification Manager

Initial Certification: 12th June 2012
This certificate re-issued: 27th June 2017
Renewal date: 11th June 2022

This certificate may only be reproduced in its entirety without any change.



Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 1 of 9




011

**Sira Certification Service
CSA Group UK**

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.
Tel: +44 (0) 1244 670900
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org

Report Summary

10 & 20 Series of proximity switch		
Safety Function: <i>'To open the normally closed (N/C) contacts in response to the proximity of a ferrous object'</i>		
10, 20 Series		
Architectural constraints:	Type A HFT = 0 (SPDT only) SFF = 63%	SIL 2
Probability of Dangerous failure on safety function:	PFH = 1.61E ⁻⁰⁸ (High Demand Mode, based on 1000cycles per year at 105°C)	SIL 3
Overall SIL-capability achieved ^[3]	SIL 2 (Based on SPDT variant)	
Hardware safety integrity compliance ^[1]	Route 1 _H	
Systematic safety integrity compliance ^[1]	Route 1 _s	
Systematic Capability ^[2]	SC 3	
Safety Function: <i>'To close the normally open (N/O) contacts in response to the proximity of a ferrous object'</i>		
10, 20 Series		
Architectural constraints:	Type A HFT = 0 (SPDT only) SFF = 30%	SIL 1
Probability of Dangerous failure on safety function:	PFH = 3.04E ⁻⁰⁸ (High Demand Mode, based on 1000cycles per year at 105°C)	SIL 3
Overall SIL-capability achieved ^[3]	SIL 1 (Based on SPDT variant)	
Hardware safety integrity compliance ^[1]	Route 1 _H	
Systematic safety integrity compliance ^[1]	Route 1 _s	
Systematic Capability ^[2]	SC 3	

^[1] These are parameters used in IEC61508 Part 2 Sections 7.4.2 & 7.4.4.

^[2] This is a measurable scale for the systematic safety integrity level; refer to IEC61508 Part 4 Section 3.5.9.

^[3] This is determined by the lowest SIL indicated by each of the parameters given above.



Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 2 of 9



011

Sira Certification Service

CSA Group UK

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.


Tel: +44 (0) 1244 670900

Email: ukinfo@csagroup.org

Web: www.csagroupuk.org

Product description and scope of certification

The magnetic proximity switches incorporate a permanent magnet to create a magnetic field which is interrupted by an external ferrous or magnetic object as it comes within the switch's sensing range. This interaction causes an armature in the switch to snap to its alternative position and thereby change the state of the electrical contacts.



Form C - SPDT

Figure 1: Electrical contacts used in safety functions

The 10 & 20 series are available with SPDT switch contacts as shown in Figure 1 above. All switches use the same mechanism and are housed in a stainless steel or brass rectangular enclosure.

Use in safety functions

The product's functionality which has been assessed for use in safety functions is:

- To close the normally open (N/O) contacts in response to the proximity of a ferrous object
- To open the normally closed (N/C) contacts in response to the proximity of a ferrous object

Product identification and configuration

The product is defined in the manufacturer's drawings listed in Table 1 below.

Table 1: Certified product drawings

Document no.	Pages	Rev	Date	Document description
ES-02023-1	1	01	18-Jan-2010	10 & 20 SPDT Base Sub-Assy 'A'; Wire W/O Term Board
S-A10-20	1	02	12-Apr-2010	Limit Switch Assembly 10/20 Series
S-KO25	1	05	-	10 & 20 series IOM
S-A10-0674	1	-	09-Apr-1997	10 Series sub assembly for standard termination



Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 3 of 9



011

Sira Certification Service CSA Group UK

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.
Tel: +44 (0) 1244 670900
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org

				with base plate and terminal BD assemblies
--	--	--	--	--

Certified 'Base Data Set' in support of safety integrity capability

The assessment has been carried out with reference to the *Conformity Assessment of Safety-related Systems (CASS)* methodology.

A Failure Mode and Effect Analysis (FMEA) has established the failure modes and predicted the random hardware failure rates. Summary details are shown below.

Failure rates have been modelled using PD IEC TR 62380:2004 reliability data handbook for the two failure modes below. Allowance has been made for the number of cycles/year and the mean operating temperature, assumed to be 2/3rds of the (maximum) rated operating temperature.

Probabilistic failure rates (symbol: λ) are expressed in failures per hour. Allocation of failures to safe or dangerous are given in Table 2a below.

For value of "1" in the following tables, refer to either Graph 1, Graph 2 or Graph 3 below, depending on the expected duty of the switch (cycles/year).

Table 2a: Base Data for SPDT switch

Failure mode	Probability of safe failures (λ_s)	Probability of dangerous failures (λ_D)
Failure of the N/O contacts to close	0.30 x λ	0.70 x λ
Failure of the N/C contacts to open	0.62 x λ	0.38 x λ




Certificate No.: Sira FSP 11020/02
 Form 7016 issue 3
 Page 4 of 9




011

Sira Certification Service
CSA Group UK
 Unit 6 Hawarden Industrial Park,
 Hawarden, CH5 3US, United Kingdom.
 Tel: +44 (0) 1244 670900
 Email: ukinfo@csagroup.org
 Web: www.csagroupuk.org

Graph 1: 10/20-series Go Switch 0 - 1,000 cycles/year

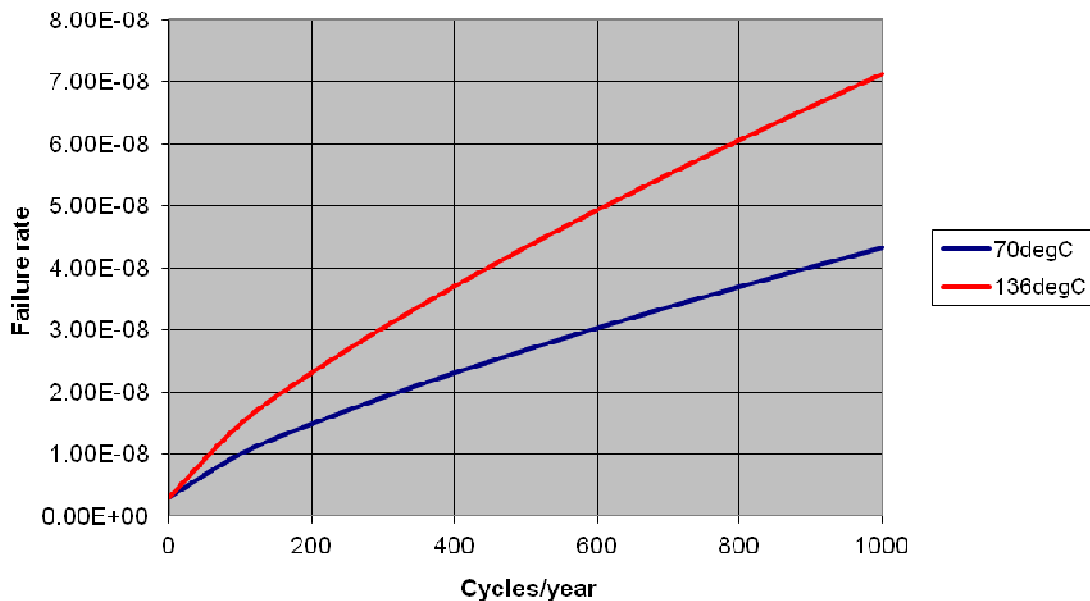

Graph 2: 10/20-series Go Switch 1,000 - 10,000 cycles/year

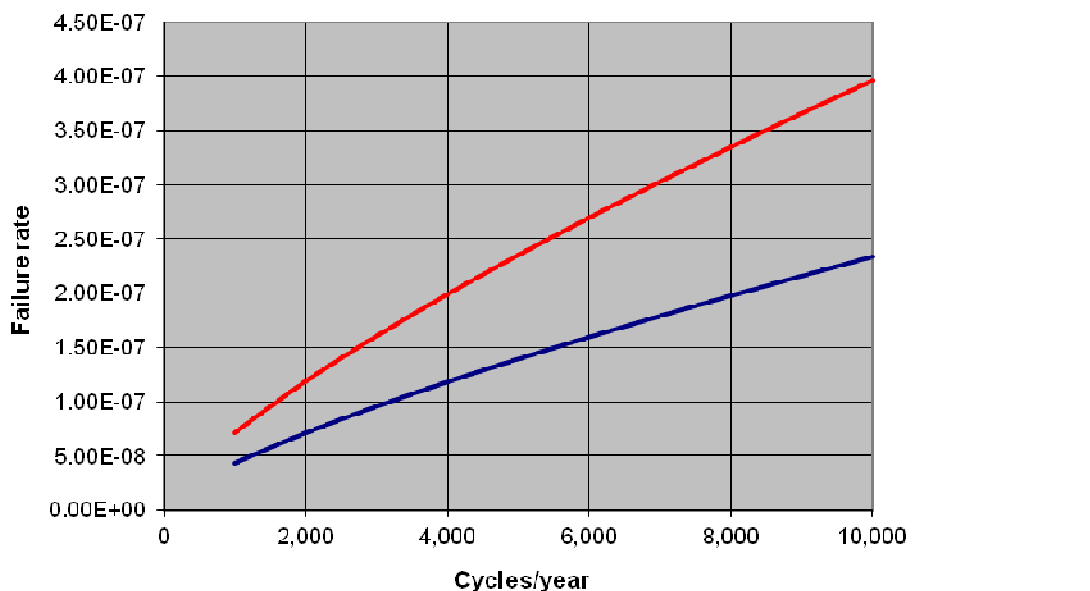


Certificate No.: Sira FSP 11020/02
 Form 7016 issue 3
 Page 5 of 9



011

Sira Certification Service
CSA Group UK
 Unit 6 Hawarden Industrial Park,
 Hawarden, CH5 3US, United Kingdom.
 Tel: +44 (0) 1244 670900
 Email: ukinfo@csagroup.org
 Web: www.csagroupuk.org

Graph 3: 10/20-series Go Switch >10,000 cycles/year

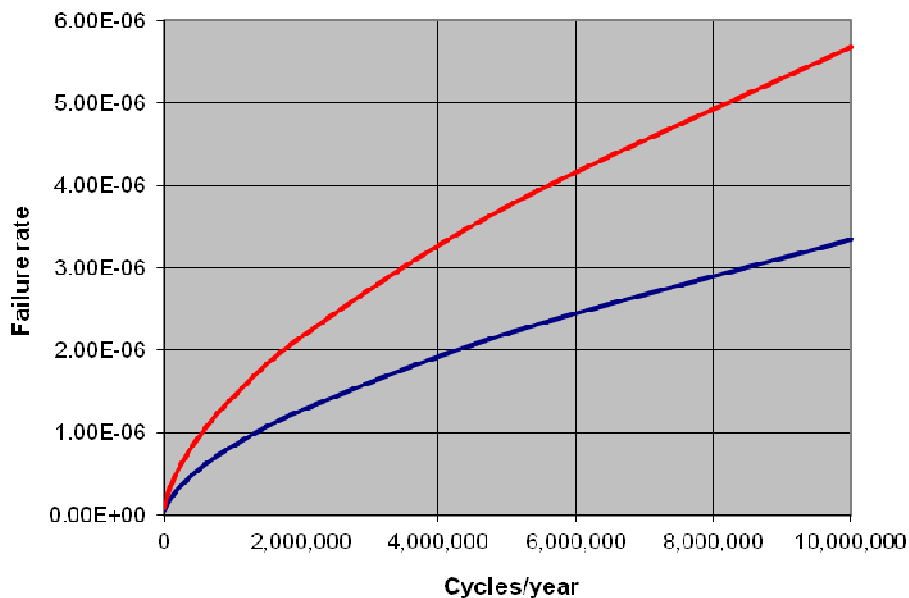

Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 6 of 9



011

Sira Certification Service
CSA Group UK
Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.
Tel: +44 (0) 1244 670900
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org

The assessment has produced the supporting information given in Table 3 below.

Table 3: Base Information

1	Product ID:	Leverless limit switch series 10 & 20, models 11 & 21 as described in Manufacturer's product catalogue, ES-01259-1 R1
2	Functional specification:	SPDT switch contacts change state in response to the proximity of a ferrous object. Full specification given in Manufacturer's product catalogue.
3	Environment / stress criteria:	Failure rates modelled using 'Ground; stationary; non-weather protected' conditions.
4	Environment limits:	Operational temperature range: -40 to +105°C standard -40 to +204°C extended
5	Lifetime limits:	10 years when used within the limits shown in graphs above, or 10 million cycles (whichever occurs first)
6	Maintenance requirements:	Refer to I,O & M sheet, S-K025
7	Repair constraints:	Refer to I,O & M sheet, S-K025
8	Hardware fault tolerance:	0 (SPDT variant)
9	Highest SIL:	SIL 2
10	Systematic fault tolerance measures:	None other than compliance with user instructions (Table 1 above)
11	Validation records:	Refer to Manufacturers validation documents assessed in Sira report R56A17769A
12	Type A / Type B:	Type A (simple)
13	Proof Test Interval:	Refer to table above
14	Mean Time to Repair (MTTR):	User defined / application dependent
15	Systematic Capability:	SC3
16	Systematic fault avoidance measures:	Refer to the lifecycle and management report 56A24114B
17	Systematic fault tolerance measures:	Refer to the lifecycle and management report 56A24114B



Conditions of Certification

The validity of the certified data is conditional on the Manufacturer complying with the following conditions:

1. The manufacturer shall analyse failure data from returned products on an on-going basis. Sira Certification Service shall be informed in the event of any indication that the actual failure rates are worse than the certified failure rates. (A process to rate the validity of field data should be used. To this end, the manufacturer should co-operate with users to operate a formal field-experience feedback programme).
2. Sira shall be notified in advance (with an impact analysis report) before any modifications to the certified equipment or the functional safety information in the user documentation is carried out. Sira may need to perform a re-assessment if modifications are judged to affect the product's functional safety certified herein.
3. On-going lifecycle activities associated with this product (e.g., modifications, corrective actions, field failure analysis) shall be subject to surveillance by Sira in accordance with 'Regulations Applicable to the Holders of Sira Certificates'.

Conditions of Safe Use

The validity of the certified data is conditional on the user complying with the following conditions:

1. The user shall comply with the requirements given in the manufacturer's user documentation (referred to in Table 3 above) in regard to all relevant functional safety aspects such as application of use, installation, operation, maintenance, proof tests, maximum ratings, environmental conditions, repair, etc;
2. Selection of this equipment for use in safety functions and the installation, configuration, overall validation, maintenance and repair shall only be carried out by competent personnel, observing all the manufacturer's conditions and recommendations in the user documentation.
3. All information associated with any field failures of this product should be collected under a dependability management process (e.g., IEC 60300-3-2) and reported to the manufacturer.
4. The unit should be tested at regular intervals to identify any malfunctions; in accordance with the safety manual.



Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 8 of 9



Sira Certification Service CSA Group UK

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.
Tel: +44 (0) 1244 670900
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org

General Conditions and Notes

1. This certificate is based upon a functional safety assessment of the product described in Sira Test & Certification Assessment Report R56A17769A;
2. If certified product or system is found not to comply, Sira Certification Service should be notified immediately at the address shown on this certificate.
3. The use of this Certificate and the Sira Certification Mark that can be applied to the product or used in publicity material are subject to the 'Regulations Applicable to the Holders of Sira Certificates' and 'Supplementary Regulations Specific to Functional Safety Certification'.
1. This document remains the property of Sira and shall be returned when requested by the issuer.

Certificate History

Issue	Date	Document no.	Comment
02	27/06/2017	R70118946A	Certificate reissued as a result of successful recertification.



Certificate No.: Sira FSP 11020/02
Form 7016 issue 3
Page 9 of 9



Sira Certification Service CSA Group UK

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom.
Tel: +44 (0) 1244 670900
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org