



ATEX Hazardous Area Approvals Fisher™ FIELDVUE™ DVC6005 Series Remote Mount Digital Valve Controllers

Hazardous Area Approvals and Special Instructions for “Safe Use” and Installations in Hazardous Locations

Certain nameplates may carry more than one approval, and each approval may have unique installation/wiring requirements and/or conditions of “safe use”. These special instructions for “safe use” are in addition to, and may override, the standard installation procedures. Special instructions are listed by approval type.

Note

This information supplements the nameplate markings affixed to the product and the DVC6005 Series Remote Mount quick start guide ([D103784X012](#)), available from your [Emerson Process Management sales office](#) or at [www.Fisher.com](#).



Approval information is for both aluminum and stainless steel constructions.

Always refer to the nameplate itself to identify the appropriate certification.

⚠ WARNING

Failure to follow these conditions of “safe use” could result in personal injury or property damage from fire or explosion and area re-classification.

⚠ WARNING

To avoid static discharge from the plastic cover when flammable gases or dust are present, do not rub or clean the cover with solvents. To do so could result in a spark that may cause the flammable gases or dust to explode, resulting in personal injury or property damage. Clean with a mild detergent and water only.

Flameproof  II 2 G**⚠ WARNING**

Do not open while energized.

Potential electrostatic charging hazard. See warning on page 1.

DVC6005 Series (HART HW1 & HW2, FOUNDATION FIELDBUS)

Ex d IIC T5 ($T_a \leq 85^\circ\text{C}$) Gb

Ex d IIC T6 ($T_a \leq 80^\circ\text{C}$) Gb

Operating ambient temperature

Standard construction -40°C to $+85^\circ\text{C}$,

Extreme temperature construction -52°C to $+85^\circ\text{C}$

DVC6015, DVC6025, DVC6035


Ex d IIC T4 ($T_a \leq 125^\circ\text{C}$) Gb

Ex d IIC T5 ($T_a \leq 95^\circ\text{C}$) Gb

Ex d IIC T6 ($T_a \leq 80^\circ\text{C}$) Gb

Operating ambient temperature

-60°C to $+125^\circ\text{C}$

Type n  II 3 G**⚠ WARNING**

Do not open while energized.

Potential electrostatic charging hazard. See warning on page 1.

DVC6005 Series (HART HW1 & HW2, FOUNDATION FIELDBUS)

Ex nC IIC T5 ($T_a \leq 80^\circ\text{C}$) Gc

Ex nC IIC T6 ($T_a \leq 75^\circ\text{C}$) Gc

Operating ambient temperature

Standard construction -40°C to $+80^\circ\text{C}$,

Extreme temperature construction -52°C to $+80^\circ\text{C}$

DVC6015, DVC6025, DVC6035

Ex nA IIC T4 ($T_a \leq 125^\circ\text{C}$) Gc

Ex nA IIC T5 ($T_a \leq 95^\circ\text{C}$) Gc

Ex nA IIC T6 ($T_a \leq 80^\circ\text{C}$) Gc

Operating ambient temperature

-60°C to $+125^\circ\text{C}$

Intrinsically Safe  II 1 GD

⚠ WARNING

Potential electrostatic charging hazard. See warning on page 1.

DVC6005 Series (HART HW1 & HW2, FOUNDATION FIELDBUS)

Ex ia IIC or IIB T4/T5/T6 (as applicable) Ga

Ex ia IIIC T4/T5/T6 (as applicable) Ga

Operating ambient temperature

Standard construction -40°C to +80°C,

Extreme temperature construction -52°C to +80°C

DVC6015, DVC6025, DVC6035

Ex ia IIC T4/T5/T6 (as applicable) Ga

Ex ia IIIC T4/T5/T6 (as applicable) Ga

Operating ambient temperature

-60°C ≤ Ta ≤ +125°C

Intrinsically safe when connected per control drawing GE60771, as shown in the following figures

DVC6005 HW1 and DVC6015, DVC6025, DVC6035 figure 1 and 5

DVC6005 HW2 and DVC6015, DVC6025, DVC6035 figure 2 and 5


DVC6005f and DVC6015, DVC6025, DVC6035 figure 3 and 5

DVC6005f and DVC6015, DVC6025, DVC6035, FISCO Installations figure 4 and 5

Special Conditions for Safe Use; Intrinsically Safe Applications

- This apparatus can only be connected to an intrinsically safe certified equipment and this combination must be compatible as regards the intrinsically safe rules.
- Covered by EN 60079-0:2012 + A11:2013 and EN 60079-11:2012 standards.
- For the model with aluminum body: the apparatus must not be submitted to frictions or mechanical impacts.


Figure 1. ATEX Loop Schematics FIELDVUE DVC6005 HW1 and DVC6015, DVC6025, DVC6035

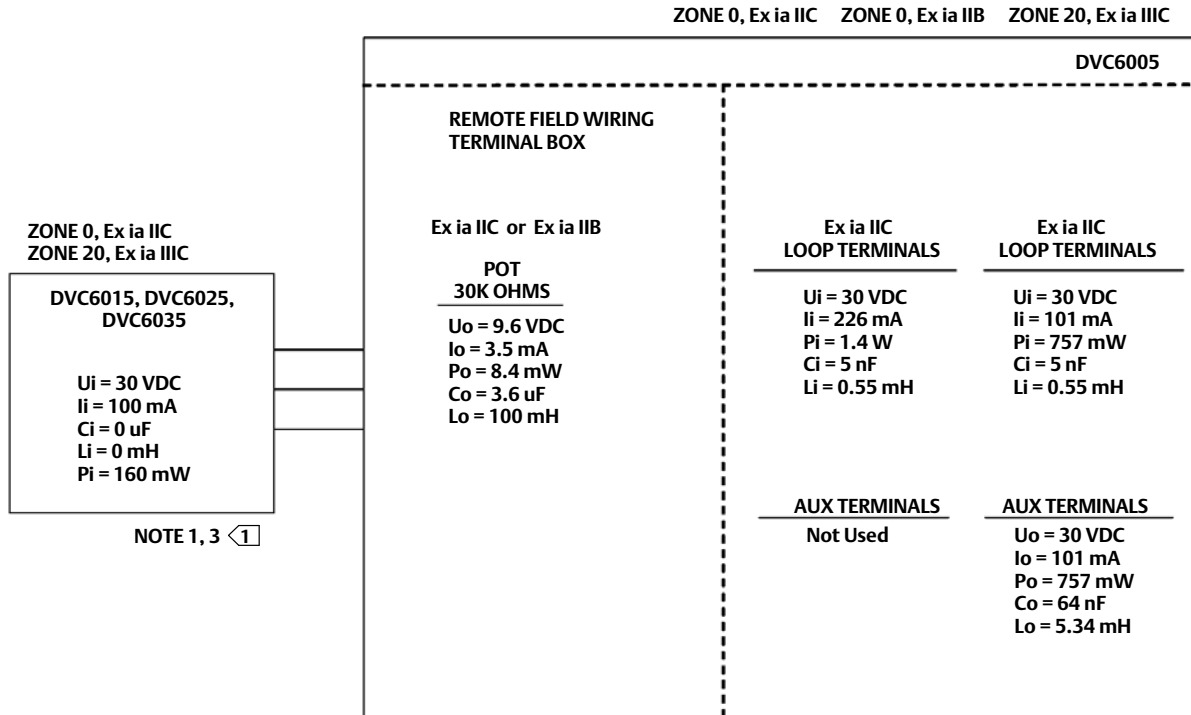

TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6015 DVC6025 DVC6035	---	---	T146°C	≤ 125°C
	T4	≤ 125°C	T135°C	≤ 114°C
	T5	≤ 95°C	T100°C	≤ 79°C
	T6	≤ 80°C	T85°C	≤ 64°C


1 SEE NOTES IN FIGURE 5

GE60771 Sheet 6, Rev. D

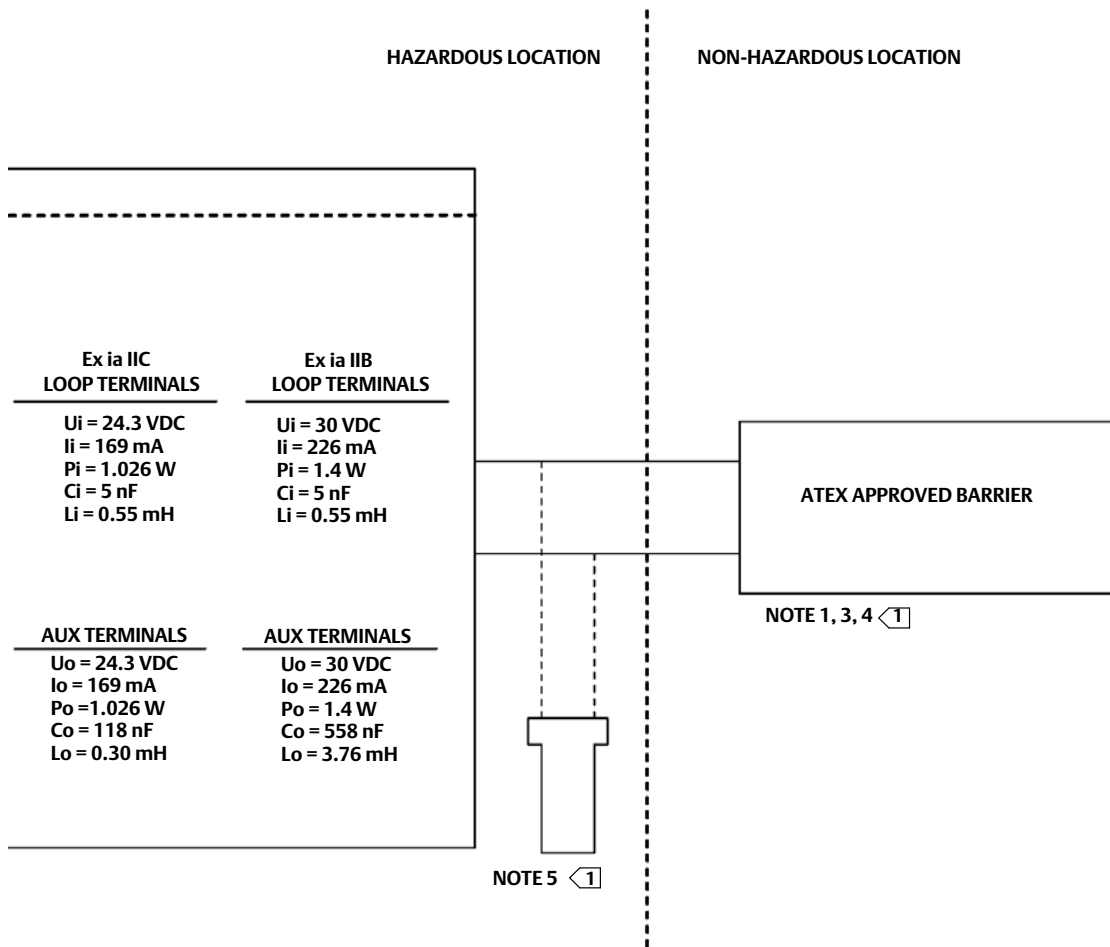

TYPE	ZONE 0 Ex ia IIC or Ex ia IIB		ZONE 20 Ex ia IIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6005	T5	$\leq 80^\circ\text{C}$	T89°C	$\leq 80^\circ\text{C}$
	T6	$\leq 75^\circ\text{C}$	T85°C	$\leq 76^\circ\text{C}$


Figure 2. ATEX Loop Schematics FIELDVUE DVC6005 HW2, and DVC6015, DVC6025, DVC6035

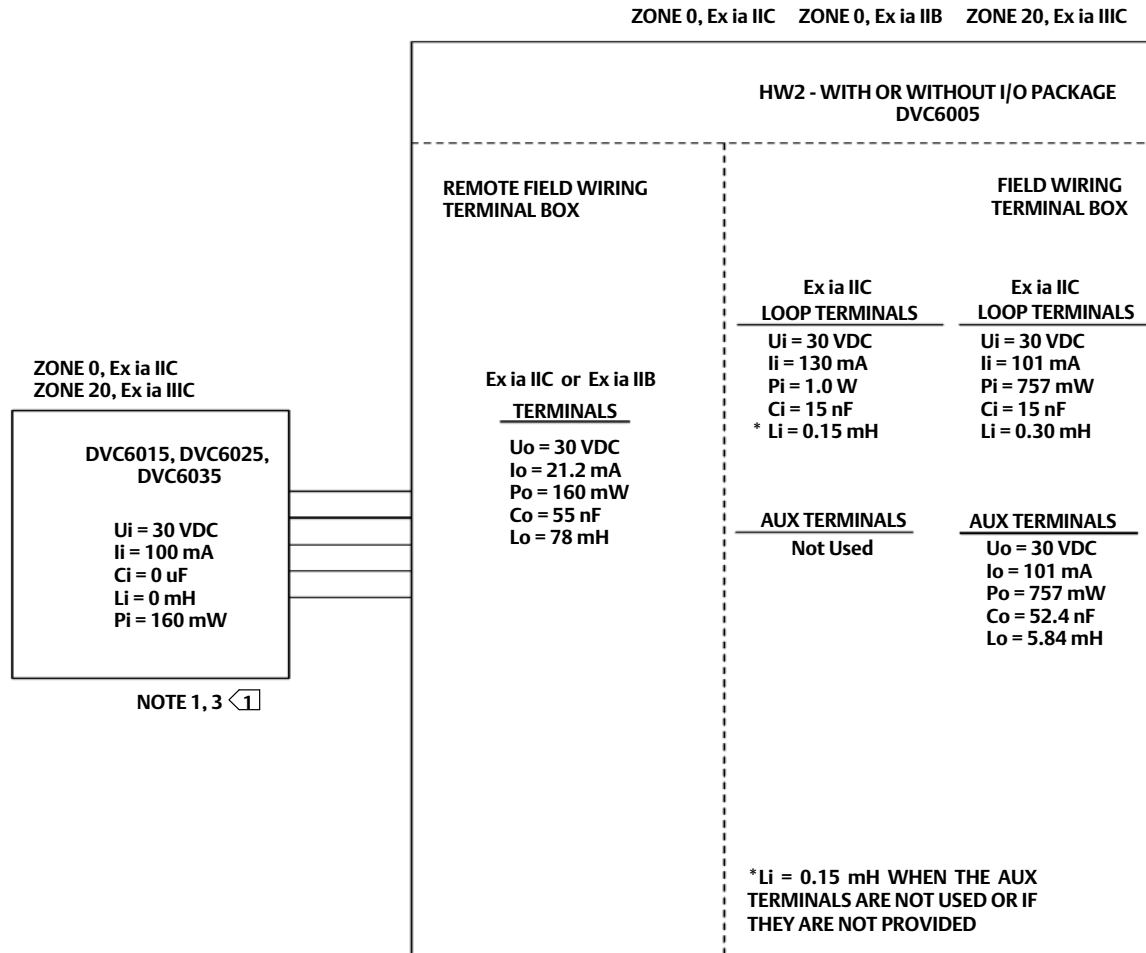

TYPE	ZONE 0, Ex ia IIC or Ex ia IIB				ZONE 20, Ex ia IIIC			
	WITHOUT I/O PACKAGE		WITH I/O PACKAGE		WITHOUT I/O PACKAGE		WITH I/O PACKAGE	
	T CODE	T AMB	T CODE	T AMB	MAX SURFACE TEMP	T AMB	MAX SURFACE TEMP	T AMB
DVC6005	T5	≤ 80°C	T5	≤ 80°C	T91°C	≤ 80°C	T104°C	≤ 80°C
	T6	≤ 74°C	T6	≤ 61°C	T85°C	≤ 74°C	T85°C	≤ 61°C

SEE NOTES IN FIGURE 5


GE60771 Sheet 13, Rev. D

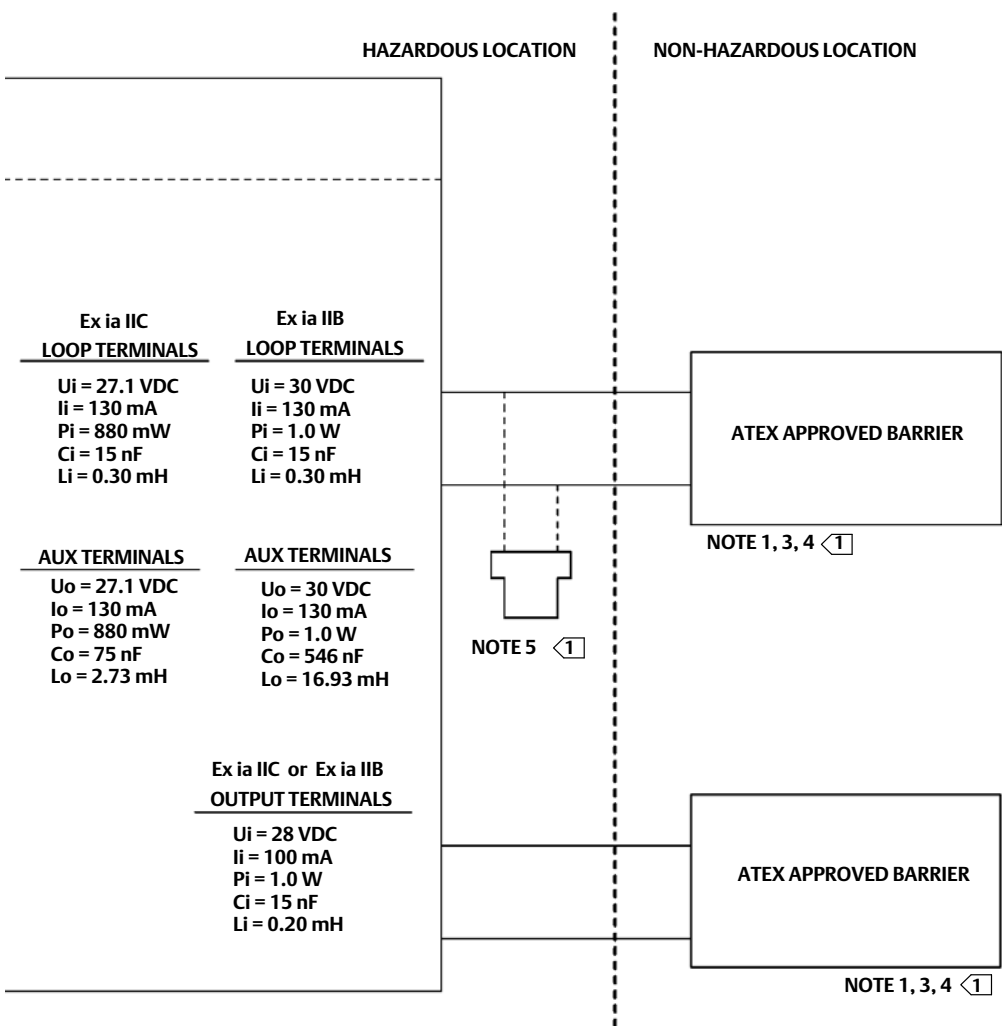

TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6015 DVC6025 DVC6035	---	---	T146°C	≤ 125°C
	T4	≤ 125°C	T135°C	≤ 114°C
	T5	≤ 95°C	T100°C	≤ 79°C
	T6	≤ 80°C	T85°C	≤ 64°C

POWER MAY BE APPLIED TO EITHER THE LOOP TERMINALS OR OUTPUT TERMINALS OR TO BOTH SETS OF TERMINALS AT THE SAME TIME
 UNITS WITHOUT I/O PACKAGE WILL NOT HAVE "OUTPUT TERMINALS" OR "AUX TERMINALS" AVAILABLE FOR CONNECTION

Figure 3. ATEX Loop Schematics FIELDVUE DVC6005f and DVC6015, DVC6025, DVC6035

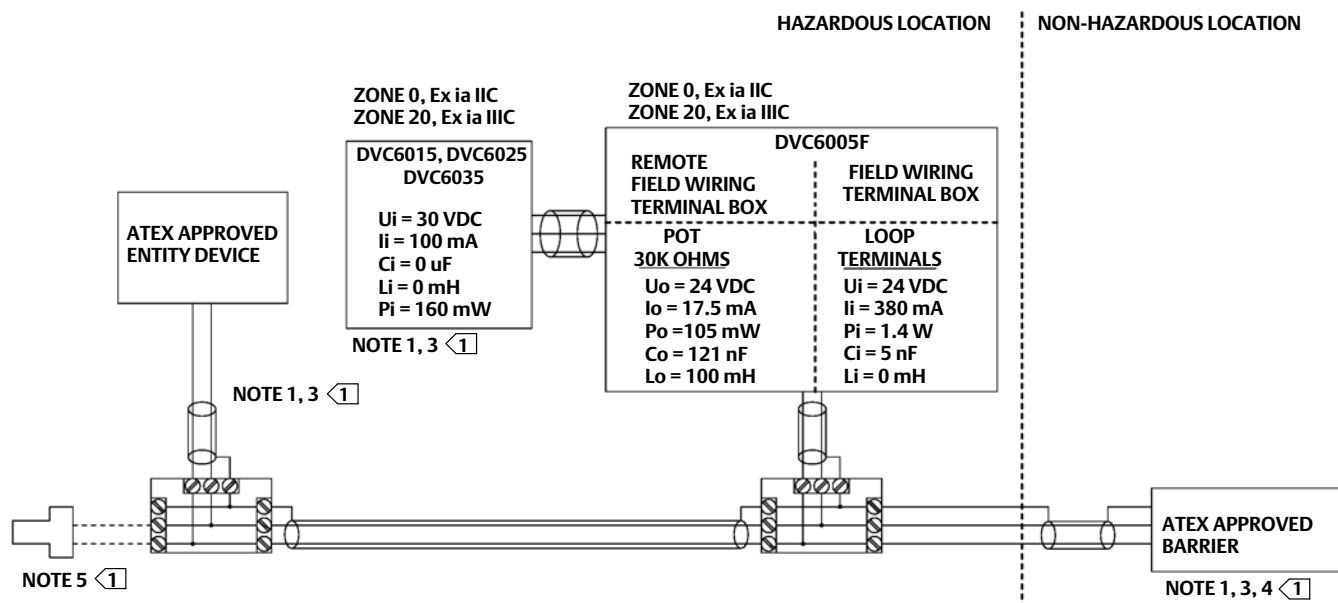


TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6015 DVC6025 DVC6035	---	---	T146°C	≤ 125°C
	T4	≤ 125°C	T135°C	≤ 114°C
	T5	≤ 95°C	T100°C	≤ 79°C
	T6	≤ 80°C	T85°C	≤ 64°C

TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6005F	T4	≤ 80°C	T103°C	≤ 80°C
	T5	≤ 77°C	T100°C	≤ 77°C
	T6	≤ 62°C	T85°C	≤ 62°C

1 SEE NOTES IN FIGURE 5

GE60771 Sheet 13, Rev. D

Figure 4. ATEX Loop Schematics FIELDVUE DVC6005f and DVC6015, DVC6025, DVC6035; FISCO Installations

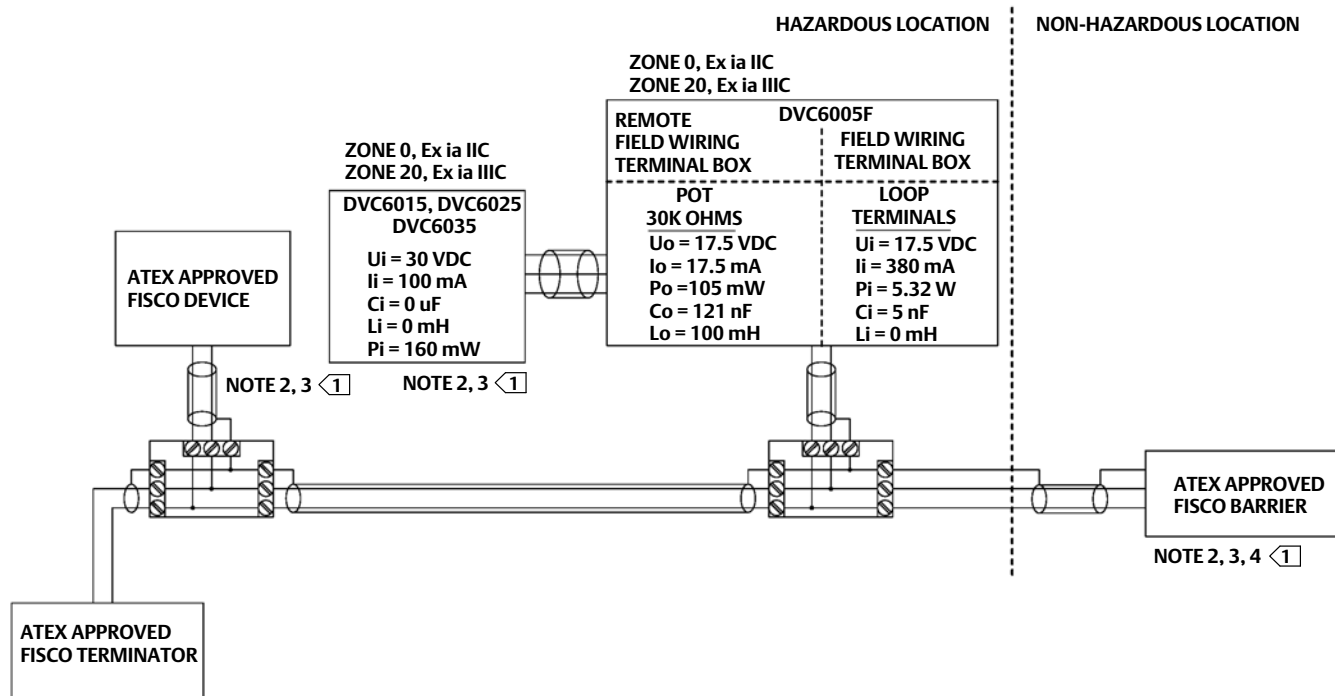

TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6015 DVC6025 DVC6035	---	---	T146°C	≤ 125°C
	T4	≤ 125°C	T135°C	≤ 114°C
	T5	≤ 95°C	T100°C	≤ 79°C
	T6	≤ 80°C	T85°C	≤ 64°C

TYPE	ZONE 0, Ex ia IIC		ZONE 20, Ex ia IIIC	
	T CODE	T AMB	MAX SURFACE TEMP	T AMB
DVC6005F	T4	≤ 80°C	T103°C	≤ 80°C
	T5	≤ 77°C	T100°C	≤ 77°C
	T6	≤ 62°C	T85°C	≤ 62°C

SEE NOTES IN FIGURE 5

Figure 5. Notes for ATEX Loop Schematics

1 THE ENTITY CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR INTERCONNECTION IS THAT THE VOLTAGE (V_{max} or U_i), THE CURRENT (I_{max} or I_i), AND THE POWER (P_{max} or P_i) OF THE INTRINSICALLY SAFE APPARATUS MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V_{oc} or U_o), AND THE CURRENT (I_{sc} or I_o), AND THE POWER (P_o) DEFINED BY THE ASSOCIATED APPARATUS. IN ADDITION, THE SUM OF THE MAX UNPROTECTED CAPACITANCE (C_i) AND MAX UNPROTECTED INDUCTANCE (L_i), INCLUDING THE INTERCONNECTING CABLING CAPACITANCE (C_{cable}) AND CABLING INDUCTANCE (L_{cable}) MUST BE LESS THAN THE ALLOWABLE CAPACITANCE (C_a) AND INDUCTANCE (L_a) DEFINED BY THE ASSOCIATED APPARATUS. IF THE ABOVE CRITERIA IS MET, THEN THE COMBINATION MAY BE CONNECTED.

$$V_{max} \text{ or } U_i \geq V_{oc} \text{ or } U_o \quad I_{max} \text{ or } I_i \geq I_{sc} \text{ or } I_o \quad P_{max} \text{ or } P_i \geq P_o \quad C_i + C_{cable} \leq C_a \quad L_i + L_{cable} \leq L_a$$

2 THE FISCO CONCEPT ALLOWS INTERCONNECTION OF INTRINSICALLY SAFE APPARATUS TO ASSOCIATED APPARATUS NOT SPECIFICALLY EXAMINED IN SUCH COMBINATION. THE CRITERIA FOR THE INTERCONNECTION IS THAT THE VOLTAGE (V_{max} or U_i), CURRENT (I_{max} or I_i), AND POWER (P_{max} or P_i), WHICH AN INTRINSICALLY SAFE APPARATUS CAN RECEIVE AND REMAIN INTRINSICALLY SAFE, CONSIDERING FAULTS, MUST BE EQUAL TO OR GREATER THAN THE VOLTAGE (V_{oc} or U_o), CURRENT (I_{sc} or I_o), AND POWER (P_o) LEVELS WHICH CAN BE DELIVERED BY THE ASSOCIATED APPARATUS, CONSIDERING FAULTS AND APPLICABLE FACTORS. IN ADDITION THE MAXIMUM UNPROTECTED CAPACITANCE (C_i) AND INDUCTANCE (L_i) OF EACH APPARATUS (OTHER THAN THE TERMINATION) CONNECTED TO THE FIELDBUS MUST BE LESS THAN OR EQUAL TO 5 nF AND 10 μ H RESPECTIVELY.

IN EACH SEGMENT ONLY ONE ACTIVE DEVICE, NORMALLY THE ASSOCIATED APPARATUS, IS ALLOWED TO PROVIDE THE NECESSARY ENERGY FOR THE FIELDBUS SYSTEM. THE VOLTAGE (U_o or V_{oc} or V_t) OF THE ASSOCIATED APPARATUS HAS TO BE LIMITED TO THE RANGE OF 9 V TO 17.5 VDC. ALL OTHER EQUIPMENT CONNECTED TO THE BUS CABLE HAS TO BE PASSIVE, MEANING THAT THEY ARE NOT ALLOWED TO PROVIDE ENERGY TO THE SYSTEM, EXCEPT FOR A LEAKAGE CURRENT OF 50 μ A FOR EACH CONNECTED DEVICE. SEPARATELY POWERED EQUIPMENT NEEDS A GALVANIC ISOLATION TO ASSURE THAT THE INTRINSICALLY SAFE FIELDBUS CIRCUIT REMAINS PASSIVE.

THE CABLE USED TO CONNECT THE DEVICES NEEDS TO HAVE THE PARAMETERS IN THE FOLLOWING RANGE:

LOOP RESISTANCE R':	15 TO 150 ohms/km
INDUCTANCE PER UNIT LENGTH L:	0.4 TO 1 mH/km
CAPACITANCE PER UNIT LENGTH C':	80 TO 200 nF/km
C' = C' LINE/LINE + 0.5' LINE/SCREEN, IF BOTH LINES ARE FLOATING OR	
C' = C' LINE/LINE + C' LINE/SCREEN, IF THE SCREEN IS CONNECTED TO ONE LINE.	
LENGTH OF SPLICE:	< 1 m (T-BOX MUST ONLY CONTAIN TERMINAL CONNECTIONS WITH NO ENERGY STORAGE CAPABILITY)
LENGTH OF SPUR CABLE:	< 30 M
LENGTH OF TRUNK CABLE:	< 1 km

AT EACH END OF THE TRUNK CABLE AN APPROVED INFALLIBLE TERMINATION WITH THE FOLLOWING PARAMETERS IS SUITABLE:

$$R = 90 \text{ TO } 100 \text{ ohms AND } C = 0 \text{ TO } 2.2 \text{ } \mu\text{F}$$

NOTE, A BUILT-IN TERMINATOR IS INCLUDED IN THE FIELD SIDE AND A SELECTABLE TERMINATOR IS AVAILABLE ON THE HOST SIDE.

THE NUMBER OF PASSIVE DEVICES CONNECTED TO THE BUS SEGMENT IS NOT LIMITED IN THE FISCO CONCEPT FOR INTRINSICALLY SAFE REASONS. IF THE ABOVE RULES ARE RESPECTED, UP TO A TOTAL LENGTH OF 1000 m (SUM OF THE LENGTH OF THE TRUNK CABLE AND ALL SPUR CABLES), THE INDUCTANCE AND CAPACITANCE OF THE CABLE WILL NOT IMPAIR THE INTRINSIC SAFETY OF THE INSTALLATION.

3 INSTALLATION MUST BE IN ACCORDANCE WITH THE NATIONAL WIRING PRACTICES OF THE COUNTRY IN USE.

4 LOOPS MUST BE CONNECTED ACCORDING TO THE BARRIER MANUFACTURER'S INSTRUCTIONS.

5 IF HAND-HELD COMMUNICATOR OR MULTIPLEXER IS USED, IT MUST BE ATEX APPROVED WITH ENTITY PARAMETERS AND INSTALLED PER THE MANUFACTURER'S CONTROL DRAWINGS.

GE60771 Sheet 2, Rev. C

Neither Emerson, Emerson Process Management, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

[list trademarks in order that they appear in document] are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Process Management
Marshalltown, Iowa 50158 USA
Sorocaba, 18087 Brazil
Cernay, 68700 France
Dubai, United Arab Emirates
Singapore 128461 Singapore

www.Fisher.com

