

Catalog 12

December 2011 - Page 3-1

ΔSPL_{Ar} Corrections

The current hydrodynamic noise prediction method differentiates valve style only through variation of the pressure recovery coefficient, Km (FL²). Separate noise prediction corrections have now been established for standard valves, Cavitrol™ III - 1 Stage valves, and the rotary attenuator. These differences are reflected in the ΔSPL_{Ar} term of the general sound pressure level prediction equation per the following equation:

$$\Delta\text{SPL}_{Ar} = a - b\left(\frac{K_m}{Ar}\right) + 10 \log\left(\frac{1}{Ar} - 1\right)$$

where,
ΔSPL_{Ar} = Correction for effects of Ar and valve style
K_m = Pressure recovery coefficient
Ar = Application ratio

$$= \frac{\Delta P_{\text{Actual}}}{P_1 - P_v}$$

a, b = coefficients given in following table:

	a	b
Standard Valves	14.4	18.8
Cavitrol III - 1 stage	9.4	18.8
Rotary Attenuator	9.4	22.6

Line Source

Equal Noise levels are on an imaginary cylinder with the pipe centerline as the axis (figure 1). As an observer moves away from the pipeline, the sound pressure level (SPL) decreases inversely to the changes in surface area of the imaginary cylinder. Use the following equation to find the sound pressure level when other than 1 meter from the pipeline surface.

$$SPL = F + 10\text{Log} \frac{1 + r}{R + r}$$

where,

r = radius of pipe based on outside diameter (meters)

R = distance from pipe surface (meters)

F = noise level calculated at 1 meter

Example

What is the noise level 50 feet from a 12 inch pipeline (from table 1, radius is 6.38 inch or 0.16 m) when the Noise Prediction Technique calculates 95 dBA at 1 meter.

$$SPL = (95) + 10\text{Log} \frac{1 + 0.16}{15.24 + 0.16}$$

$$SPL = 95 - 11.2$$

$$SPL = 83.8 \text{ dBA}$$

Note

This procedure determines the noise level radiated only by the pipeline. Other noise sources could combine with the pipeline noise source to have a greater overall sound pressure level.

Point Source

Vent applications are typical examples of point source noise (figure 2). As an observer moves away from a point source, the sound level (SPL) decreases inversely to the changes in surface area of the imaginary sphere. Use the following equation to find the sound pressure level when other than 3 meters from the point source and below a horizontal plane through the point source.

$$SPL = F + 20\text{Log} \frac{3}{R}$$

Table 1. Radii of Nominal Pipe Sizes

RADIUS OF PIPE	NOMINAL PIPE SIZES, NPS																
	1/2	3/4	1	1-1/2	2	2-1/2	3	4	6	8	10	12	16	20	24	30	36
Inch	0.42	0.53	0.66	0.95	1.19	1.44	1.75	2.25	3.31	4.31	5.38	6.38	8.00	9.00	12.00	15.00	18.00
Meter	0.0107	0.0133	0.0168	0.0241	0.0302	0.0366	0.0445	0.0572	0.0841	0.11	0.14	0.16	0.20	0.23	0.30	0.38	0.46

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Cavitol are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

© 1983, 2011 Fisher Controls International LLC. All rights reserved

Figure 1. Typical Line Source


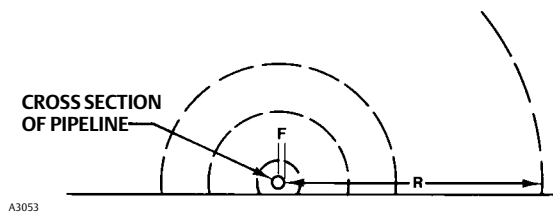


Figure 2. Typical Point Source

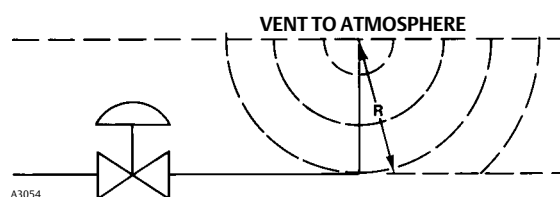

where,

R = distance from source (meters)

F = noise level calculated at 3 meters

Example

What is the noise level 50 feet (15 meters) from the point source when the Noise Prediction Technique calculates 100 dBA at 3 meters.

$$SPL = 100 + 20\text{Log} \frac{3}{15}$$

$$SPL = 100 - 14$$

$$SPL = 86 \text{ dBA}$$

Note

This procedure determines the noise level radiated only by the point source. Other noise sources could combine with the point source noise to have a greater overall sound pressure level.



Octave Band Sound Pressure Levels

Aerodynamic noise has an overall sound pressure level (measured one meter downstream of the valve and one meter away from the pipe-wall) which does not indicate the sound pressure level in each frequency band. Use the information in table 1 to determine octave band sound pressure levels and to construct a spectrum for a particular trim type and piping combination.

Example


An NPS 6 valve with Whisper Trim™ III cage has an overall SPL of 85 dBA. The octave band SPLs are as follows:

- SPL at 63 Hz = 85 + (-50) = 35 dBA
- 125 Hz = 85 + (-50) = 35 dBA
- 250 Hz = 85 + (-45) = 40 dBA
- 500 Hz = 85 + (-33) = 52 dBA
- 1000 Hz = 85 + (-21) = 64 dBA
- 2000 Hz = 85 + (-9) = 76 dBA
- 4000 Hz = 85 + (-6) = 79 dBA
- 8000 Hz = 85 + (-3) = 82 dBA

Table 1. Octave Band Sound Pressure Level Corrections

PIPE SIZE NPS	PIPE SCHEDULE	FOR WHISPER TRIM III (OUTLET VELOCITY ≤ 0.3 MACH)								FOR ALL OTHERS							
		Octave Bands, Hz															
		63	125	250	500	1000	2000	4000	8000	63	125	250	500	1000	2000	4000	8000
1	5S to XXS	---	---	---	---	---	---	---	---	-50	-50	-50	-39	-27	-15	-6	-3
1-1/2	5S to XXS	---	---	---	---	---	---	---	---	-50	-50	-50	-39	-27	-15	-6	-3
2	5S to XXS	---	---	---	---	---	---	---	---	-50	-50	-50	-39	-27	-15	-3	-6
3	5S to XXS	---	---	---	---	---	---	---	---	-50	-50	-50	-39	-27	-15	-3	-6
4	5S to XXS	---	---	---	-45	-33	-21	-9	-6	-50	-50	-50	-39	-27	-15	-3	-6
6	5S to XXS	-50	-50	-45	-33	-21	-9	-6	-3	-50	-50	-39	-27	-15	-3	-6	-9
8	5S to 160	-50	-50	-45	-33	-21	-9	-6	-3	-50	-50	-29	-27	-15	-3	-6	-9
10	5S to 160	-50	-50	-45	-33	-21	-9	-6	-3	-50	-50	-39	-27	-15	-3	-6	-9
12	5S to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
14	5S to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
16	5S to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
18	5S to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
20	5S to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
24	5S to 160	-45	-33	-21	-9	-6	-3	-9	-15	-39	-27	-15	-3	-6	-9	-21	-33
	120 to 160	-50	-45	-33	-21	-9	-6	-3	-9	-50	-39	-27	-15	-3	-6	-9	-21
30	5S to 30	-45	-33	-21	-9	-6	-3	-9	-15	-39	-27	-15	-3	-6	-9	-21	-33
36	10 to 40	-45	-33	-21	-9	-6	-3	-9	-15	-39	-27	-15	-3	-6	-9	-21	-33
42	10 to 30	-45	-33	-21	-9	-6	-3	-9	-15	-39	-27	-15	-3	-6	-9	-21	-33

Figure 1. Noise Source Combination Curve

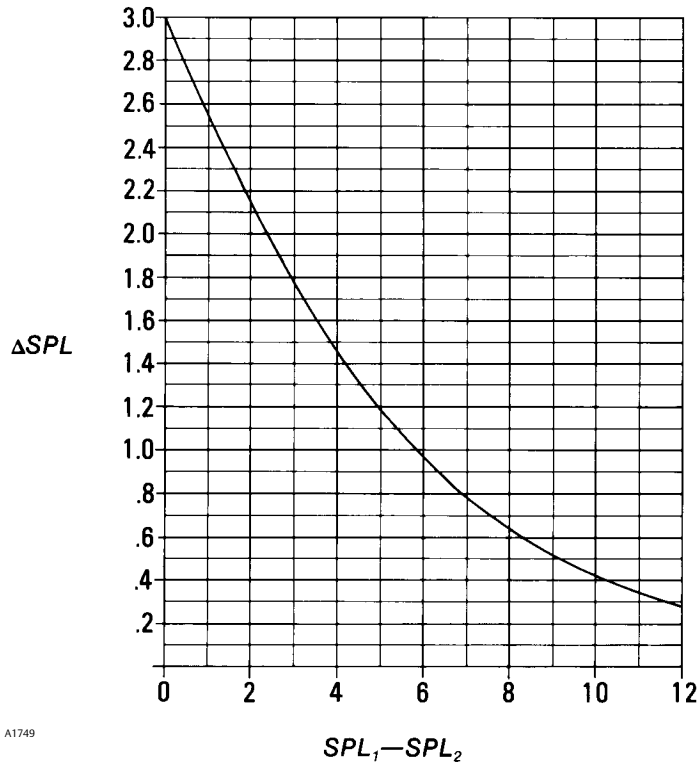

A1749

Combining Noise Sources

Two noise levels, calculated separately, can be combined as one overall noise source. The sources can be point, line or a combination of both. Use the following technique.

1. Calculate the noise level of each source at the point where the combined noise level is desired. Use either the line source or point source techniques found on page 3-2.

2. Find the difference in the sound pressure level of the two sources at the new location.

3. Enter the abscissa of figure 1 with the difference found in step 2. Move vertically to intersect the curve. Read ΔSPL at this point.

4. The overall noise level of the two sources is the loudest noise source plus the ΔSPL found in step 3.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.



Introduction

The major cause of hydrodynamic noise (noise resulting from liquid flow) is cavitation. Cavitation is the process of the formation and subsequent collapse of vapor bubbles in a flowing liquid stream. The noise and damage produced by cavitation may be traced to the collapse of these vapor bubbles. When the vapor bubbles do not collapse, flashing occurs, potentially causing trim damage but little hydrodynamic noise.

Source Treatment

Cavitation and its associated noise and damage can often be avoided at the design phase of a project if proper consideration is given to service conditions. However, where service conditions are fixed, a valve may have to operate at pressure conditions normally resulting in cavitation. In such instances, noise control by source treatment can be employed by utilizing one of several methods: multiple valves in series, a special control valve, or a standard control valve body with special internal parts.

Cavitrol™ III one-stage trim utilizes specially-shaped, diametrically-opposed holes through the cage wall that reduce the fluid's tendency to cavitate and reduce fluid turbulence. When the application pressure drop is within stated values, the trim helps eliminate the cavitation noise and damage.

Cavitrol III two- and three-stage and Cavitrol IV trims eliminate cavitation noise and damage by taking the total pressure drop in a series of intermediate stages. In operation, fluid enters the first section of the cage through many orifices. In passing through orifices, each fluid stream undergoes a portion of the total pressure drop. The fluid then passes through a series of additional orifices and undergoes additional pressure drops at each stage. The number of stages required to prevent cavitation damage depends upon the total amount of pressure reduction that must be taken across the cage. A control valve using two- or three-stage Cavitrol III or Cavitrol IV trim will exhibit a sound pressure level of 90 dBA or less.

Cavitrol V trim, for use with Vee-Ball™ valves, minimizes cavitation noise and damage by controlling the formation and collapse of vapor bubbles. The trim consists of a carefully designed bundle of tubes installed within the valve, downstream of the V-notch ball. The tubes prevent the flow stream from reaching its potential

Table 1. Available Cavitrol Trim

Trim	Valve Body Pressure Rating	Valve Body Design
Cavitrol III One-Stage	CL125 to CL600	ET
	CL150 to CL900	EWT ELT
	CL900 through CL2500	DBAQ
	Note 1	CC
Cavitrol III Two-Stage	CL600	ET EWT
	CL900	EWT (NPS 8 x 6 & 12 x 8) ELT DBAQ EHT
	CL1500	DBAQ EHT
	CL2500	DBAQ EHT
Cavitrol III Three-Stage	CL900 through CL2500	DBAQ EHT
Cavitrol IV	CL2500	CAV 4
Cavitrol V	CL150 and CL300 CL150 through CL600	U V100

Note 1: 10,000 psig API (American Petroleum Institute).


minimum area, thus maintaining maximum pressure head and reducing the possibility of vapor bubble formation. Also, the tubes physically limit the size and number of vapor bubbles that can form. In many installations, Cavitrol V trim creates resistance to the flow stream, which produces a back pressure. This back pressure can keep the pressure head from falling below the vapor pressure of the process liquid. Cavitrol V trim can reduce control valve noise by as much as 15 dBA.

Table 1 lists available Cavitrol trims.

Path Treatment

Path treatment of cavitation noise is not generally recommended since cavitation is usually accompanied by severe physical damage to the valve parts or piping components. Such cavitation should not go unchecked because of the potential hazard of eventual valve and piping failure. However, Cavitrol III one-stage trim in a properly-sized valve can be used to control cavitation damage, thus allowing use of the path treatment approach to reduce noise.

Figure 1. Typical Path Treatments

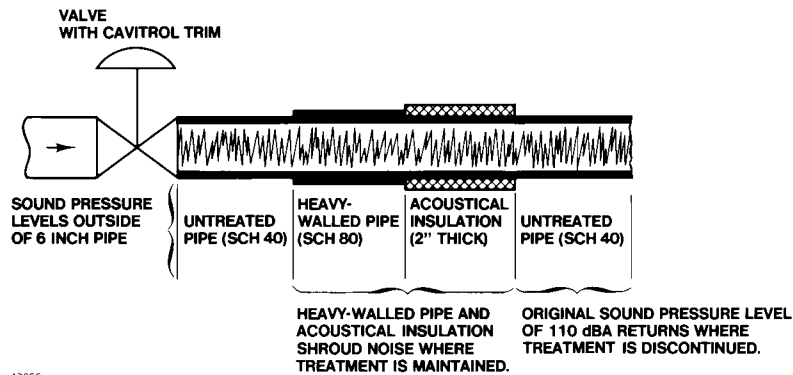

A3056

To help control cavitation damage, Cavitrol III one-stage trim utilizes a number of pairs of small, diametrically-opposed flow holes through the wall of the cage. Each specially shaped hole admits a jet of cavitating liquid which impacts at the center of the cage with the jet admitted from the opposing hole. Thus a continuous cushion is formed which prevents cavitating liquid from contacting the metal surfaces, ensuring the vapor bubble collapse takes place in the center of the flow stream.

Once the cavitation damage is controlled in this manner, it becomes practical to use the path treatment method (figure 1) to reduce the local noise caused by the cavitating liquid. This may be accomplished through the use of heavy-walled pipe and acoustical or thermal insulation.

Pipe wall attenuation varies with size and schedule. See page 3-9.

Thermal insulation

Unlike for acoustic insulation, an International Standard for noise reduction associated with thermal insulation does not currently exist. Therefore, when considering the use of thermal insulation as a means to reduce audible noise, it is recommended to abide by the guidelines suggested by the Flow Controls Institute (FCI).

FCI Tech Sheet #CVR 401 "Insulation Systems Used as External Treatment for Control Valve and Regulator Noise" suggests that thermal insulation will typically provide 5 dBA of noise reduction per 1 inch of insulation thickness, with a maximum benefit of 12 dBA.

Acoustic insulation

When considering the use of acoustic insulation to reduce audible noise, the methods defined in the international standard ISO 15665 "Acoustics – Acoustic Insulation for pipes, valves, and flanges" should be referenced. Per this standard, noise reduction is a function of several factors including NPS, frequency spectrum, acoustic insulation class, and more.

Audible noise reductions calculated in the Fisher sizing tools are based on the prediction models expressed in ISO 15665, 2003-08-15.

While path treatment methods like insulation can provide significant reduction in observed noise levels, it is recommended that best practices for internal valve/pipe noise be adhered to at all times. Please consult manufacturer's specifications for attenuating capability and application of specific insulation. Note: Insulation may result in higher pipeline temperatures. Associated allowable stress limits of the piping at elevated temperatures should be considered in the decision of applying insulation for noise reduction.

Introduction

Use the following procedure to determine the A-weighted sound pressure level (SPL) noise generated by liquid flow through control valves. The information needed is:

- Valve style and type of trim
- Size and schedule of adjacent piping
- Inlet pressure (P_1 , psia) and pressure drop (ΔP , psi)
- Vapor pressure of the liquid (P_v , psia)
- Calculated required C_v
- Recovery coefficient (K_m)
- Specific gravity if different from water

Hydrodynamic noise in a control valve is dependent on the nature of the pressure recovery downstream of the valve orifice. If the recovery is such that cavitation is present, the resultant noise is higher than if the fluid did not cavitate.

The transition from non-cavitating to cavitating is included in the prediction technique. Therefore, the user does not have to determine the onset of cavitation. This level of cavitation is not the same as the levels of cavitation determined by K_m and K_c .

To calculate the predicted hydrodynamic noise, solve both the non-cavitating and cavitating equations and use the greater of the two as the noise prediction. This procedure can be used for all designs except Cavitrol™ III two- and three-stage trims and Cavitrol IV trim. With Cavitrol III two- and three-stage trims and with Cavitrol IV trims, the sound pressure level will never exceed 90 dBA. For these trims, an additional upper limit of 90 dBA is placed on this procedure because these trims prevent cavitation.

Prediction Technique

Non-Cavitating

$$SPL = SPL_{\Delta P} + \Delta SPL_{C_v} + \Delta SPL_k + \Delta SPL_{k_m} + \Delta SPL_g$$

Where

SPL	=	Overall noise level (dBA) in decibels at a predetermined point (1 meter downstream of the valve outlet and 1 meter from the pipe surface)
$SPL_{\Delta P}$	=	Base SPL in dB, determined as a function of pressure drop (ΔP)
ΔSPL_{C_v}	=	Correction in dB for required liquid sizing coefficient (C_v)
ΔSPL_k	=	Correction in dB achieved through the use of heavy-walled pipe and acoustical or thermal insulation
ΔSPL_{k_m}	=	Correction in dB for given recovery coefficient (K_m)
ΔSPL_g	=	Correction in dB for fluids with a specific gravity value which differs from the water (for water, $\Delta SPL_g = 0$)

Cavitating

$$SPL = SPL_{\Delta P} + \Delta SPL_{C_v} + \Delta SPL_k + \Delta SPL_{AR}$$

Where

SPL	=	Overall noise level in decibels (dBA) at a predetermined point (1 meter downstream of the valve outlet and 1 meter from the pipe surface)
$SPL_{\Delta P}$	=	Base SPL in dB determined as a function of pressure drop (ΔP)
ΔSPL_{C_v}	=	Correction in dB for required liquid sizing coefficient (C_v)
ΔSPL_k	=	Correction in dB achieved through the use of heavy-walled pipe and acoustical of thermal insulation
ΔSPL_{AR}	=	Correction in dB for applications ratio [$AR = \Delta P / (P_1 - P_v)$] and the recovery coefficient (K_m)

Prediction Example

Given:

Valve style—Fisher ED
 Type of trim—standard
 Adjacent piping—NPS 4 schedule 40 pipe
 Recovery coefficient (K_m)—.7

Inlet pressure (P_1)—250 psia
 Pressure drop (ΔP)—175 psi
 Vapor pressure (P_v)—11.5 psia (water at 200° F)
 Calculated required C_g —70


Non-Cavitating

$SPL_{\Delta P}$	=	81 (value from page 3-8)
SPL_{C_v}	=	18 (value from page 3-9)
SPL_k	=	-32.9 (value from page 3-9)
SPL_{k_m}	=	.7 (value from page 3-10)
SPL_g	=	0 (value from page 3-11)
SPL	=	66.8 dBA

Cavitating

$SPL_{\Delta P}$	=	107 (value from page 3-8)
SPL_{C_v}	=	18 (value from page 3-9)
SPL_k	=	-32.9 (value from page 3-9)
SPL_{AR}	=	-8 (value from page 3-10)
SPL	=	84.1 dBA

SPL_{ΔP} vs ΔP For All Valve Styles

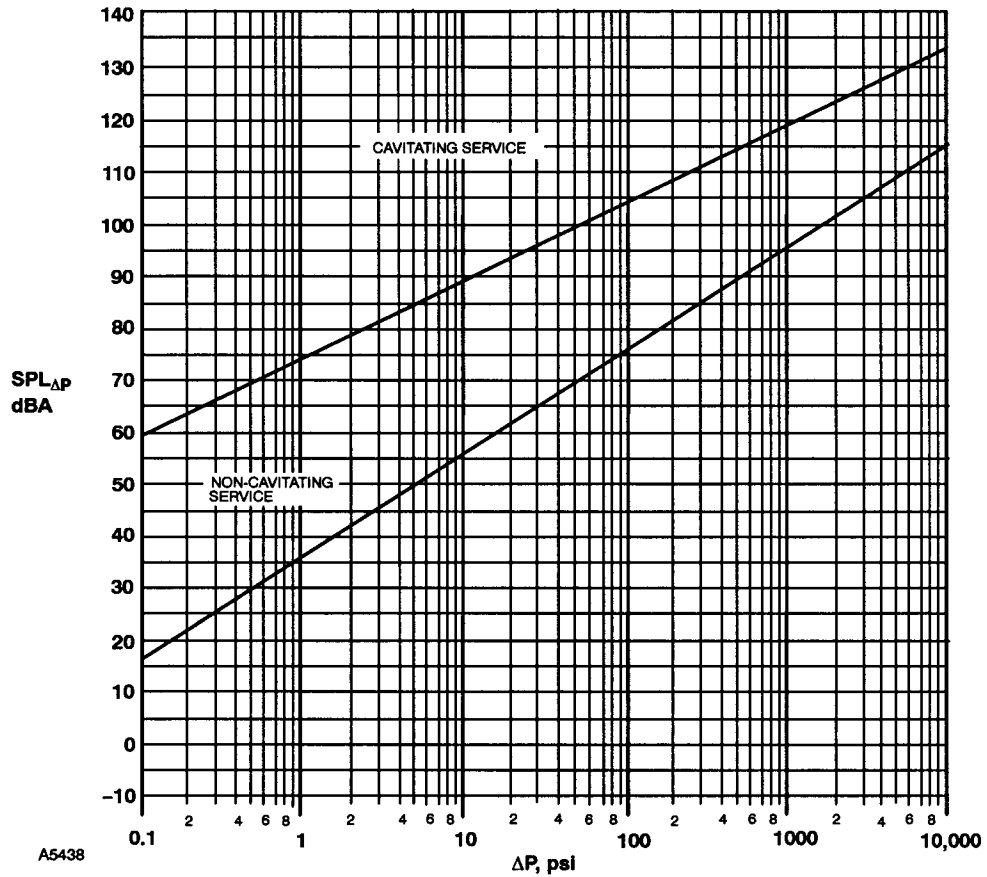


Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Cavitol are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

Catalog 12



December 2011 - Page 3-9

ΔSPC_{Cv} vs C_v and ΔSPL_K

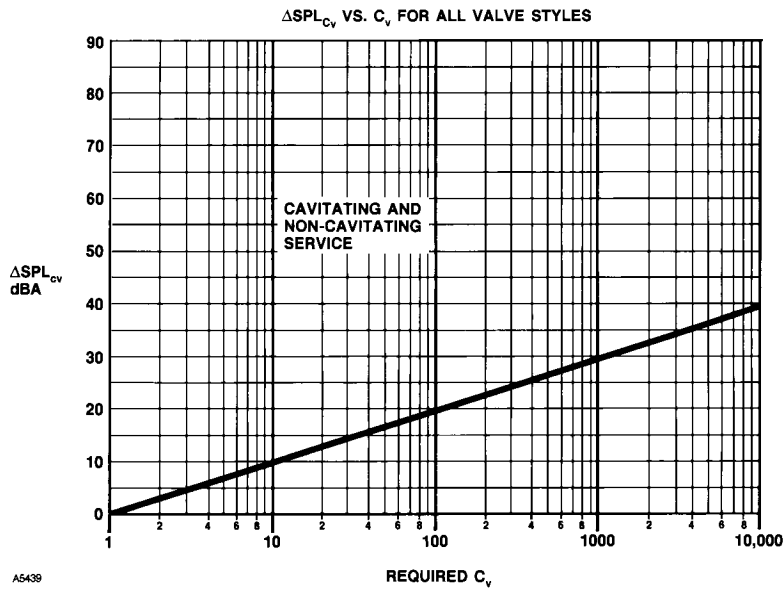


ΔSPL_K

Nominal Pipe Size, NPS	Pipe Schedule												
	10	20	30	40	60	80	100	120	140	160	STD	XS	XXS
1	---	---	---	-48.8	---	-52.1	---	---	---	-56.1	-48.8	-52.1	-61.1
1-1/2	---	---	---	-42.8	---	-46.1	---	---	---	-49.9	-42.8	-46.1	-54.3
2	---	---	---	-38.7	---	-42.8	---	---	---	-47.7	-39.3	-42.6	-50.6
3	---	---	---	-35.9	---	-39.2	---	---	---	-43.1	-35.9	-39.2	-46.7
4	---	---	---	-32.9	---	-36.3	---	-38.9	---	-40.9	-32.9	-36.3	-43.5
6	---	---	---	-29.5	---	-33.5	---	-36.1	---	-38.5	-29.5	-33.5	-40.4
8	---	-25.7	-26.6	-27.9	-30.1	-32.0	-33.6	-35.4	-36.6	-37.7	-27.9	-32.0	-37.3
10	---	-23.5	-25.4	-26.9	-29.8	-31.4	-33.1	-34.7	-36.3	-37.4	-26.9	-29.8	---
12	---	-22	-24.5	-26.3	-29.3	-31.1	-33.0	-34.6	-35.7	-37.2	-25.6	-28.2	---
14	-21.2	-23.1	-24.8	-26.2	-28.9	-31.1	-33.1	-34.4	-35.9	-37	-24.8	-27.4	---
16	-20.0	-22	-23.6	-26.2	-28.6	-30.9	-32.8	-34.4	-35.9	-36.9	-23.6	-26.2	---
18	-19	-21	-24	-26.2	-28.8	-30.9	-32.8	-34.4	-35.6	-36.9	-22.6	-25.2	---
20	-18.2	-21.8	-24.3	-25.8	-28.7	-30.8	-32.8	-34.3	-35.8	-36.9	-21.8	-24.3	---
24	-16.7	-20.3	-23.9	-25.8	-28.7	-30.8	-32.9	-34.5	-35.7	-37.0	-20.3	-22.8	---
30	-16.9	-21.1	-23.1	---	---	---	---	---	---	---	-18.6	-21.1	---
36	---	---	---	---	---	---	---	---	---	---	-17.2	-19.7	---
42	---	---	---	---	---	---	---	---	---	---	-16.1	-18.6	---
44	---	---	---	---	---	---	---	---	---	---	-15.7	-18.3	---
48	---	---	---	---	---	---	---	---	---	---	-15.1	-17.6	---
52	---	---	---	---	---	---	---	---	---	---	-14.6	-17.1	---
56	---	---	---	---	---	---	---	---	---	---	-14.1	-16.6	---
60	---	---	---	---	---	---	---	---	---	---	-13.6	-16.1	---

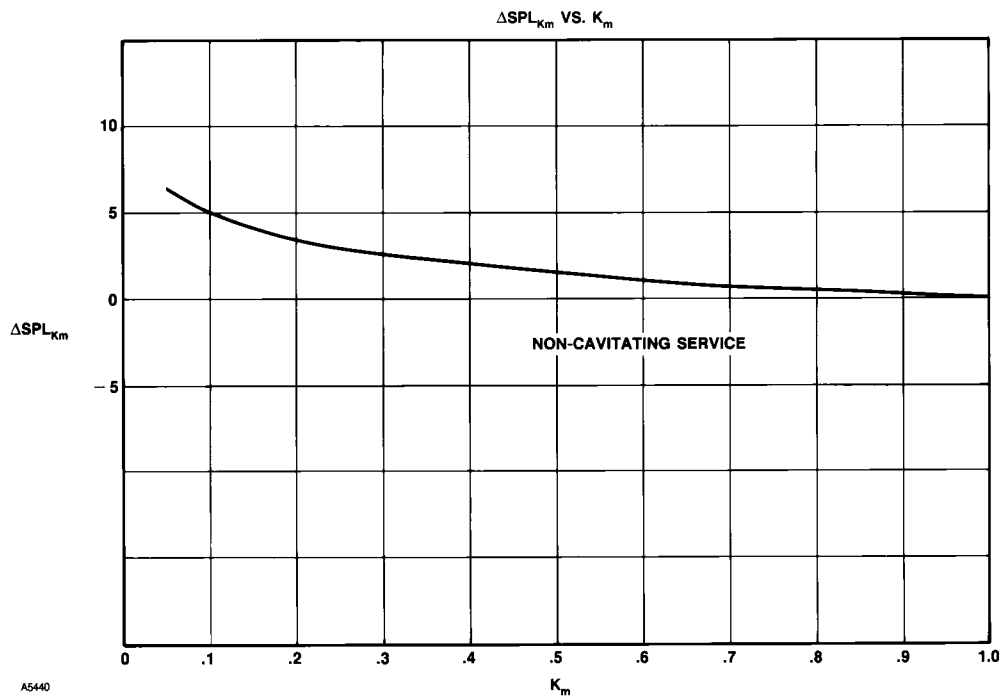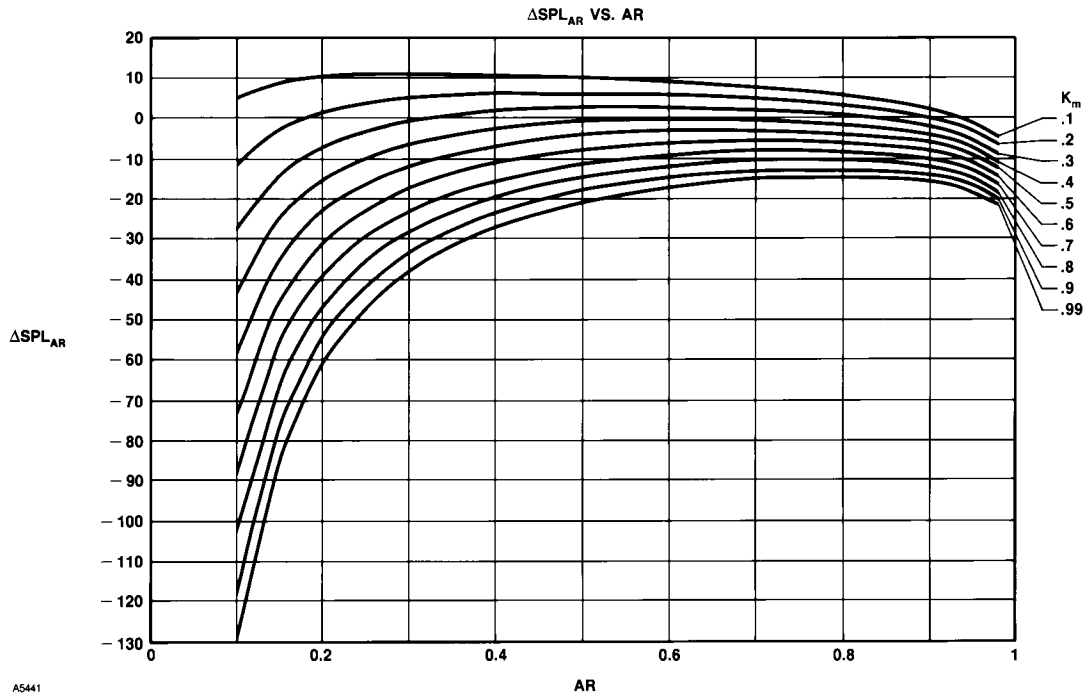

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

Catalog 12

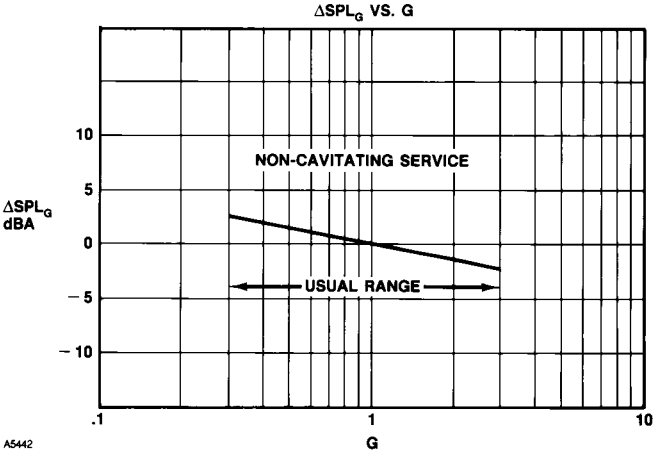

This page is intentionally left blank

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

© 2011 Fisher Controls International LLC. All rights reserved

