

Improving Polypropylene Plant Performance with Process Gas Chromatographs

Process gas chromatographs have been used since the 1950s to provide real-time compositional data to process control systems. Today, there are tens of thousands of process gas chromatographs in use throughout the process industry making the gas chromatograph the analytical workhorse for online compositional measurements. One example of how process gas chromatographs are used for improving process operations can be found in the polypropylene plant in a refinery.


One of the most common polymers in the world is polypropylene. It is found in applications ranging from plastic bottles for household cleaners, parts inside automobiles and the fibers for carpet. Polypropylene is also temperature resistant, making it an ideal material for medical equipment since it can be sterilized. It is also commonly used to make baby bottles since being heated can clean them. To meet this demand for polypropylene polymer, polypropylene plants can be found around the world.

The Polypropylene Plant

As with other polymers, polypropylene is often a mixture of propylene plus a second compound called a comonomer. The actual chemical used for the comonomer varies depending on the desired properties, but can range from a simple chemical like ethylene to more complex butenes and hexenes. Figure 1 shows a typical polypropylene plant design with the chemical reactions done in two stages. Polymer-grade propylene enters the first reactor along with the catalyst. Hydrogen is also added to control the size of the polymer molecule and sets the overall melting point of the final product. These reaction components are continuously fed into the first reactor. To keep everything as a slurry, an inert diluent compound such as hexane or butane is added. The diluent also helps absorb the heat that is generated in the reaction.

The still chemically active mixture leaves the first reactor and enters the second reactor where fresh propylene and the comonomer are added to finish the reaction process. The finished polymer leaves the second reactor, along with the diluent and any unreacted components and enters a flash tank. Due to the flash tank's lower

Figure 1 - Flow Diagram of a Typical Polypropylene Plant

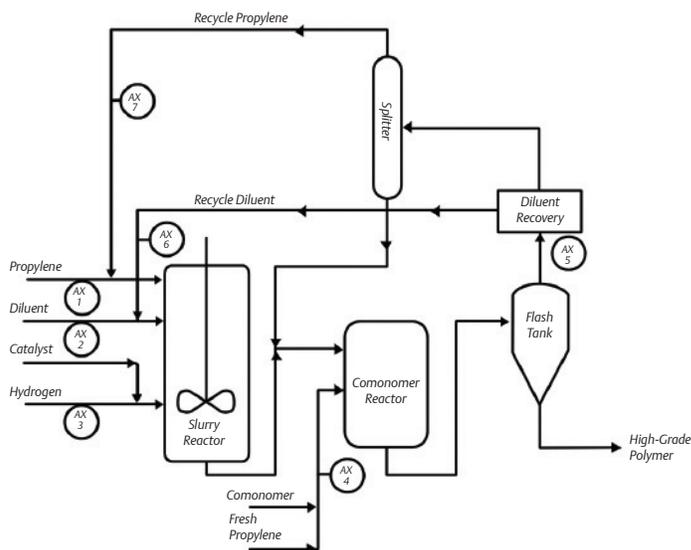

pressure, any unreacted monomers and diluent vaporizes and leaves the top of the vessel. The polymer settles out the bottom to be extruded into plastic sheets or pellets.

The vapors leaving the top of the flash tank enter a diluent recovery system to separate the diluent from any unreacted monomers as well as to filter out any polymer dust that might have carried over. The diluent is recycled back to the feed of the reactor. The unreacted propylene and comonomer enter a stripper where they are separated from each other. The propylene is recycled to the feed of the first reactor and the comonomer is recycled to the feed of the second reactor.

Improving Unit Performance with Process Gas Chromatographs

Due to the extremely competitive nature of a commodity like polypropylene, it is critical that the quality of the plastic be high and consistent. To insure this high quality, it is important that the ingredients fed into the polymer reactor be tightly controlled. A number of process gas chromatographs are used to provide live feedback on the quality of the feed streams.

The first three process gas chromatographs measure the quality of the feed entering the first reactor starting with the propylene feed (AX #1 in Figure 1). This gas chromatograph monitors common impurities like C₂, C₃, methyl acetylene (MA) and propadiene (PD). The diluent is monitored (AX #2 in Figure 1) for the presence of impurities; as is the hydrogen feed to the reactor (AX #3 in Figure 1). Finally, the feed to the second reactor is measured (AX #4 in Figure 1) for impurities. The actual compounds that are measured vary depending on which comonomer and diluent are used.

To provide feedback to the control system on how the reactions are progressing in the reactors, it is common to measure the flash tank off-gases (AX #5 in Figure 1).

Measuring the amount of unreacted C₃ as well as the comonomer and H₂ can indicate the quality of reactions occurring. However, this can be a difficult point to sample due to the high concentration of polymer dust. Special sample probes are used to filter out the polymer and to selfclean the filters to minimize plugging.

The last two common measurement points monitor the recycle streams. The diluent recycle is monitored (AX #6 in Figure 1) for H₂, C₃ and comonomer. The propylene recycle is monitored (AX #7 in Figure 1) for H₂ and comonomer. A summary of these applications can be seen in Figure 2.

The Emerson Solution

Emerson has a long history of providing process gas chromatographs for the polypropylene industry. Emerson's process gas chromatographs are setting the standard for online process measurement by supplying analyzers that are both robust and capable of handling the analytical requirements.

Table 1 - Summary of Process Gas Chromatograph Applications in a Typical Polypropylene Plant

Analyzer #	Stream	Components Measured	Measurement Objective
1	Propylene feed	CO ₂ , C ₃ , MA, PD	Propylene feed purity
2	Diluent feed	Hydrocarbons	Diluent feed purity; exact components vary with diluent used
3	Hydrogen feed	Hydrocarbons	Hydrogen feed purity
4	Comonomer feed	Hydrocarbons	Comonomer feed purity; exact components vary with comonomer used
5	Flash tank off-gas	H ₂ , C ₃ , comonomer	Feedback to control system on reaction kinetics
6	Diluent recycle	H ₂ , C ₃ , comonomer	Monitor impurities recycled with the diluent
7	Propylene recycle	H ₂ , comonomer	Monitor impurities recycled with the propylene

www.RosemountAnalytical.com

www.analyticexpert.com
[www.twitter.com/RAIhome](https://twitter.com/RAIhome)

Emerson Process Management
 Rosemount Analytical
 Gas Chromatograph Center of Excellence
 10241 West Little York, Suite 200
 Houston, TX 77040 USA
 Toll Free 866 422 3683
 T +1 713 396 8880 (North America)
 T +1 713 396 8759 (Latin America)
 F +1 713 466 8175
gc.csc@emerson.com
www.RosemountAnalytical.com

©2012 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount Analytical is a mark of one of the Emerson Process Management family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.