

Large Refinery Saves \$49,200 in Regulatory Compliance Costs with 8714 Meter Verification Diagnostic

RESULTS

- Reduced maintenance costs
- Improved ease of regulatory compliance
- Reduced spare inventory requirements

APPLICATION

Well water flows

CUSTOMER

A large refinery located in the United States

CHALLENGE

As part of the state Environmental Protection Agency (EPA) requirements, this customer is required to accurately account for the amount of well water they extract from the ground. This is accomplished by using magnetic flowmeter technology to measure and totalize the amount of water consumption from each of their seven water wells. In order to confirm that the meters are measuring accurately, the state EPA requires that the meter calibration be verified on an annual basis. In order to satisfy the EPA requirements, this customer would have to send their meters to a flow lab each year to ensure that the calibration had not changed, thus verifying the usage being reported to the state was accurate. This required two Instrument Technicians to remove each meter and ship it to a flow lab for calibration, which increased maintenance costs. A spare meter was required to be installed while the flowmeter was being calibrated in the flow lab. Since some of the wells were the same size, a total of four spare meters were used on a rotating basis, which increased inventory costs.

SOLUTION

In order to reduce the costs associated with meter verification, it was recommended that this customer use Rosemount 8700 Flowmeters with in-situ meter verification diagnostic capabilities. The 8714 meter verification diagnostic performed a full meter verification of the sensor by taking a baseline signature of the sensor when it was first installed.



By using 8714 meter verification diagnostics, this customer satisfied their state EPA meter verification requirements without having to remove the flowmeter from the line or maintain any spare meters.



The Rosemount 8700 Flowmeter

ROSEMOUNT[®]

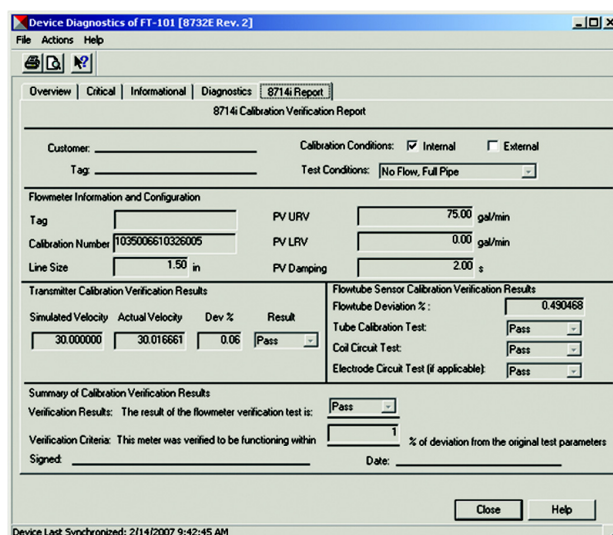
For more information:
www.rosemount.com


EMERSON[™]
Process Management



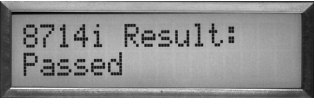
Running the 8714 meter verification compared the original signature to the current measurements. Since the values were within the user set parameters, the flowmeter was within specification. The 8714 meter verification diagnostic ran in minutes, without the need to remove the flowmeter from the line.

By using 8714 meter verification diagnostics, this customer satisfied their state EPA meter verification requirements without having to remove the flowmeter from the line or maintain any spare meters. By not having to send the meters out for calibration, the customer eliminated flow lab costs, maintenance costs, and shipping costs, resulting in a \$49,200 cost savings.

A meter verification report can be printed from AMS® Suite: Intelligent Device Manager. Alternatively, the calibration values can be taken from the local operator interface or field communicator and written into the report by hand. The report can then be submitted to any regulatory agency to certify that the meter calibration has not changed, satisfying verification requirements.



8714 meter verification report in AMS Device Manager.

 <p>8714 Calibration Verification checks transmitter and flowtube sensor characteristics.</p>	 <p>Deviation from baseline values are reported.</p>	 <p>Meter Calibration is verified.</p>
--	---	--

RESOURCES

Emerson Process Management Petroleum Refining Industry

<http://www2.emersonprocess.com/en-US/industries/refining/Pages/index.aspx>

Rosemount E-Series Magnetic Flowmeter Transmitters

<http://www2.emersonprocess.com/en-US/brands/rosemount/Flow/Magnetic-Flowmeters/E-Series-Transmitters/Pages/index.aspx>

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which can be found at www.rosemount.com/terms_of_sale. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. PlantWeb is a registered trademark of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.

**Emerson Process Management
Rosemount Inc.**
8200 Market Boulevard
Chanhassen, MN 55317 USA
www.rosemount.com
Tel (USA) 800 522 6277
Tel (International) +1 (303) 527 5200
Fax +1 (303) 530 8459

**Emerson Process Management
Flow B.V.**
Neonstraat 1
6718 WX Ede
The Netherlands
T +31 (0) 318 495555
F +31 (0) 318 495556

Emerson FZE
P.O. Box 17033
Jebel Ali Free Zone
Dubai UAE
Tel +971 4 811 8100
Fax +971 4 886 5465

**Emerson Process Management Asia
Pacific Private Limited**
1 Pandan Crescent
Singapore 128461
T (65) 6777 8211
F (65) 6777 0947
Enquiries@AP.EmersonProcess.com

**Emerson Process Management Latin America
Multipark Office Center**
Multipark Office Center
Turrubares Building, 3rd & 4th floor
Guachipelin de Escazu, Costa Rica
T+(506) 2505-6962
international.mmcam@emersonprocess.com

ROSEMOUNT®

For more information:
www.rosemount.com

