
Conditioning Orifice Plate technology; taking the standard to a new level of capability

Conditioning Orifice Plates (the 1595 Conditioning Orifice Plate and the 405C Compact Conditioning Orifice Plate) are differential pressure producers used to measure rate of fluid flow in a pipe. Conditioning Orifice Plate Technology is based on the same Bernoulli streamline energy equation as standard orifice plates, resulting in the same Discharge Coefficient versus Reynolds Number relationship. Standard orifice plates are typically specified and installed according to one of three standards; AGA Report Number 3, ASME MFC 3M or ISO 5167. Although the Conditioning Orifice Plate was designed as closely as possible to these standards, there are four areas of departure:

- Plate thickness
- Orifice / Beta
- Piping Requirements
- Accuracy

These differences from the written standards allow the conditioning orifice plate greater flexibility in installation and better performance over a wide variety of conditions. Benefits include:

- Superior performance
- Installation in short straight pipe run, tight fit applications
- Improved performance in wet gas applications by allowing condensate to pass and preventing the “damming” effect suffered by standard orifice plates. None of the three standards provide allowances for drain vent holes in the orifice plate

Figure 1-1. Rosemount Compact Conditioning Orifice Flowmeters



Figure 1-2. Rosemount 1595 Conditioning Orifice Plate



Figure 1-3. Standard Orifice Plate



Table 1-1 depicts a comparison between conditioning orifice plate technology and standard orifice plate technology, highlighting the deviations from the standards. These deviations allow for a more flexible and accurate installation as straight pipe requirements are reduced.

Table 1-1. The Conditioning Orifice Plate as Compared to the Orifice Plate Standards

Category	1595 and 405C Conditioning Orifice Plate technology			
Total Straight Pipe Run Requirements Upstream (In Pipe Diameters) Downstream (In Pipe Diameters)	1595 and 405C 2 2	ASME MFC 3M Up to 60 7	AGA Report Number 3 Up to 95 4.2	ISO 5167 Up to 60 7
Flow Conditioners	Not Required.	All three standards sometimes require flow conditioners to shorten required straight pipe run.		
Pressure Taps Flange Taps Corner Taps D and D/2	Complies with all three standards.(1595) Complies with ASME and ISO. Corner taps not included in AGA Report Number 3. (405C). In development.			
O-Plate Thickness 2 in. to 4 in. 6 in. 8 in. to 24 in.	Complies with all three Standards. Compliant to ASME MFC 3M and ISO 5167. Thicker than AGA Report Number 3. Complies with all three Standards.			
Beta	Area of 4 holes = Area of single hole of same β for standard orifice of all three standards. ⁽¹⁾			
All other plate dimensions (Including angle of bevel, bore thickness (e), etc.)	Complies with all three Standards.			
Surface Finish	Complies with all three Standards.			
Discharge Coefficient	Follows ISO 5167 ⁽²⁾			
Expansion Factor	Follows ISO 5167			

(1) At Schedule Standard

(2) Follows ISO 5167 with a bias shift – The bias is determined in a calibration flow lab and factored into the DP calculation.

1.1 Plate thickness

Table 1-2 depicts the plate thicknesses of Conditioning Orifice Plates and the thickness ranges for standard orifice plates as dictated by the three standards. The plate thicknesses for the 1595 and 405C Conditioning Orifice Plates fall within the values provided in all three standards with one exception, the AGA Report Number 3 standard for the 6” line. In the cases of non-compliance, the Conditioning Orifice Plates are thicker than the standard orifice plates. This helps prevent plate deflection under higher flow rates and leads to a more accurate flow measurement.

Table 1-2. Plate Thickness

Line size	1595 Conditioning Orifice Plate	405C Compact Conditioning Orifice Plate	ASME MFC 3M		AGA Report Number 3		ISO 5167	
			Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
2 in (50.8 mm)	0.125 in (3.2 mm)	0.125 in (6.4 mm)	0.120 in (3.1 mm)	0.180 in (4.6 mm)	0.115 in (2.9 mm)	0.130 in (3.3 mm)	0.008 in (0.2 mm)	0.125 in (3.2 mm)
3 in (76.2 mm)	0.125 in (3.2 mm)	0.125 in (6.4 mm)	0.120 in (3.1 mm)	0.180 in (4.6 mm)	0.115 in (2.9 mm)	0.130 in (3.3 mm)	0.012 in (0.3 mm)	0.158 in (4.0 mm)

Table 1-2. Plate Thickness

Line size	1595 Conditioning Orifice Plate	405C Compact Conditioning Orifice Plate	ASME MFC 3M		AGA Report Number 3		ISO 5167	
			Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
4 in (101.6 mm)	0.125 in (3.2 mm)	0.125 in (6.4 mm)	0.120 in (3.1 mm)	0.180 in (4.6 mm)	0.115 in (2.9 mm)	0.130 in (3.3 mm)	0.017 in (0.4 mm)	0.206 in (5.2 mm)
6 in (152.4 mm)	0.250 in (6.4 mm)	0.250 in (6.4 mm)	0.120 in (3.1 mm)	0.275 in (7.0 mm)	0.115 in (2.9 mm)	0.192 in (4.9 mm)	0.026 in (0.7 mm)	0.310 in (7.9 mm)
8 in (203.2 mm)	0.250 in (6.4 mm)	0.250 in (6.4 mm)	0.120 in (3.1 mm)	0.275 in (7.0 mm)	0.115 in (2.9 mm)	0.319 in (8.1 mm)	0.036 in (0.9 mm)	0.413 in (10.5 mm)
10 in (254.0 mm)	0.250 in (6.4 mm)	0.250 in (6.4 mm)	0.120 in (3.1 mm)	0.500 in (12.7 mm)	0.115 in (2.9 mm)	0.319 in (8.1 mm)	0.044 in (1.1 mm)	0.520 in (13.2 mm)
12 in (304.8 mm)	0.250 in (6.4 mm)	0.250 in (6.4 mm)	0.183 in (4.6 mm)	0.500 in (12.7 mm)	0.175 in (4.4 mm)	0.398 in (10.1 mm)	0.053 in (1.3 mm)	0.620 in (15.8 mm)
14 in (355.0 mm)	0.350 in (8.9 mm)	N/A	0.183 in (4.6 mm)	0.500 in (12.7 mm)	0.175 in (4.4 mm)	0.398 in (10.1 mm)	0.058 in (1.5 mm)	0.683 in (17.3 mm)
16 in (406.4 mm)	0.350 in (8.9 mm)	N/A	0.183 in (4.6 mm)	0.500 in (12.7 mm)	0.175 in (4.4 mm)	0.500 in (12.7 mm)	0.067 in (1.7 mm)	0.783 in (19.9 mm)
18 in (457.2 mm)	0.350 in (8.9 mm)	N/A	0.183 in (4.6 mm)	0.500 in (12.7 mm)	0.175 in (4.4 mm)	0.500 in (12.7 mm)	0.075 in (1.9 mm)	0.883 in (22.4 mm)
20 in (508.0 mm)	0.350 in (8.9 mm)	N/A	0.183 in (4.6 mm)	0.500 in (12.7 mm)	0.240 in (6.1 mm)	0.505 in (12.8 mm)	0.083 in (2.1 mm)	0.984 in (25.0 mm)
24 in (609.6 mm)	0.500 in (12.7 mm)	N/A	0.245 in (6.2 mm)	0.500 in (12.7 mm)	0.240 in (6.1 mm)	0.562 in (14.3 mm)	0.100 in (2.5 mm)	1.184 in (30.1 mm)

Note
The values in **Bold** reflect the deviation from the standards.

1.2 Orifice beta

The most obvious difference between standard orifice plates and the Conditioning Orifice Plates is the number of holes in the plate. The Conditioning Orifice Plates have four holes that are placed in a circular pattern, leaving a metal section of the plate in the center of the pipe. This causes the flow to condition itself as it is forced through the four holes, thereby removing the requirement for a flow conditioner. Because of this phenomenon, Conditioning Orifice Plates provide superior performance in short straight pipe run and tight fit applications.

Standard orifice plates are sized to a beta ratios from 0.1 to 0.75 (beta ratio = d/D , where “d” is the bore size and “D” is the internal diameter of the pipe/meter tube). The 1595 and 405C Conditioning Orifice Plates are designed with 2 standard bore sizes, one for high flow rates and one for low flow rates. These standard bore sizes are fixed and do not change with pipe schedule. We refer to the two different bore sizes as betas because the sum of the area of the four bores is equivalent to the area of a single bore “d” in the standard equation “beta = d/D ” for a standard schedule pipe. In a standard schedule pipe, the Conditioning Orifice Plate beta ratios equal 0.4 and 0.65. The fixed bores or beta ratios make it easier to specify and order while reducing inventory.

Another concern for orifice plates is centering during installation. The orifice must be centered in the pipe or conditions may arise that negatively affect accuracy. The 405C Compact Conditioning Orifice Plate is supplied with a centering ring and assures a centered plate to within

1/32". If the orifice plate, whether it is a Conditioning Orifice Plate or a standard orifice plate, is not centered, there can be as much as 5% degradation in accuracy.

1.3 Piping requirements

Standard orifice plates require significant straight pipe to assure an accurate flow measurement. The Conditioning Orifice Plate, however only requires 2 diameters of straight pipe upstream and 2 diameters downstream. In some cases, this can equate to a 96 percent reduction in piping, resulting in significant savings. Additionally, the reduction in straight pipe allows more flexibility in determining flowmeter placement.

Table 1-3 and Table 1-4 demonstrate that the 1595 and 405C Conditioning Orifice Plates require just 2 diameters upstream and downstream. The values in Italics are the reduction in pipe requirements that would be realized if a Conditioning Orifice Plate were to be used instead of a standard orifice plate.

Table 1-3. Straight Pipe Required in Pipe Diameters (0.4 Beta)

	Beta = 0.4	Rosemount Conditioning Orifice Plate	ASME MFC 3M	AGA Report Number 3 ⁽¹⁾	ISO 5167
Upstream	Single 90 Degree Bend	2	16 88%	16 88%	16 88%
	Single Tee	2	9 78%	9 78%	9 78%
	Two or more Bends in the same plane	2	10 80%	10 80%	10 80%
	Two or more Bends in a different plane	2	50 96%	50 96%	50 96%
	Reducer (to next standard pipe size)	2	5 60%	6 67%	5 60%
	Valve (fully open)	2	12 83%	21 90%	12 83%
Downstream		2	6 67%	3.2 38%	6 67%

(1) The piping requirements specified are for Beta = 0.40.

Table 1-4. Straight Pipe Required in Pipe Diameters (0.65 Beta)

	Beta = 0.65	Rosemount Conditioning Orifice Plate	ASME MFC 3M	AGA Report Number 3 ⁽¹⁾	ISO 5167 ⁽¹⁾
Upstream	Single 90 Degree Bend	2	44 95%	44 95%	44 95%
	Single Tee	2	22 94%	44 95%	36 95%
	Two or more Bends in the same plane	2	44 95%	44 95%	44 95%
	Two or more Bends in a different plane	2	60 97%	95 98%	60 97%
	Reducer (to next standard pipe size)	2	12 83%	11 82%	12 83%
	Valve (fully open)	2	18 89%	35 94%	18 89%
Downstream		2	7 71%	4.2 48%	7 71%

(1) The piping requirements specified are for Beta = 0.67.

Note

The values in Italics reflect the reduction in straight pipe requirements.

1.4 Accuracy

The innovative technology and design of the Conditioning Orifice Plate enables multiple benefits without compromising performance. The Conditioning Orifice Plate follows the discharge coefficient of the ISO 5167-2:2003(E) with a bias. This bias is determined at the time of manufacture and factored into the DP calculation. With just 4 diameters (2 up and 2 down) of straight piping, the COP discharge coefficient follows the standard orifice plate discharge coefficient when installed according to the relevant standard. This has been verified in independent test laboratories. Results can be found in the *Rosemount 405 Compact Orifice Flowmeter Series and 1595 Conditioning Orifice Plate Flow Test Data Book and Flow Handbook*, document number 00821-0100-4810.

Table 1-5, Table 1-6, and Equation 1 depict the discharge coefficient uncertainties for all orifice plates according to typical standards. Graphs 1 and 2 illustrate the discharge coefficient uncertainties, comparing the standard orifice plates (with sufficient straight pipe run) against the Conditioning Orifice Plate (with 2 diameters of straight pipe run immediately after a flow disturbance). The end result is that the Conditioning Orifice Plate rivals the performance of the standard orifice plates while virtually eliminating straight pipe run requirements. With sufficient straight run, the accuracy curve of the Conditioning Orifice Plate would follow the ISO 5167 standard.

Table 1-5. Conditioning Orifice Technology Discharge Coefficient Uncertainty (U_{Cd})


Beta	Reynolds Number < 10,000	Reynolds Number > 10,000
0.4	0.5%	0.5%
0.65	1.50%	1.00%

Table 1-6. Discharge Coefficient Uncertainty (U_{Cd})
ISO 5167-2:2003 (Section 5.3.3.1) & ASME MFC-3Ma:2007 (Section 2-4.3.3.1)⁽¹⁾


Beta	Reynolds Number < 10,000	Reynolds Number > 10,000
$0.2 < \beta < 0.5$	0.5%	0.5%
$0.5 < \beta < 0.6$	1.0%	0.5%
$0.6 < \beta < 0.75$	$(1.667 * \beta)\%$	$(1.667 * \beta - 0.5)\%$

(1) When Pipe inside Diameter (D) is < 71.12 mm (2.8 in), the following additional uncertainty must be added to the values from Table 1-6:
 $\pm 0.9 (0.75 - \beta) (2.8 - D)\%$ (U.S. Customary Units)
 $\pm 0.9 (0.75 - \beta) (2.8 - D/25.4)\%$ (SI Units)

Graph 1: Discharge coefficient uncertainties for 0.4 beta

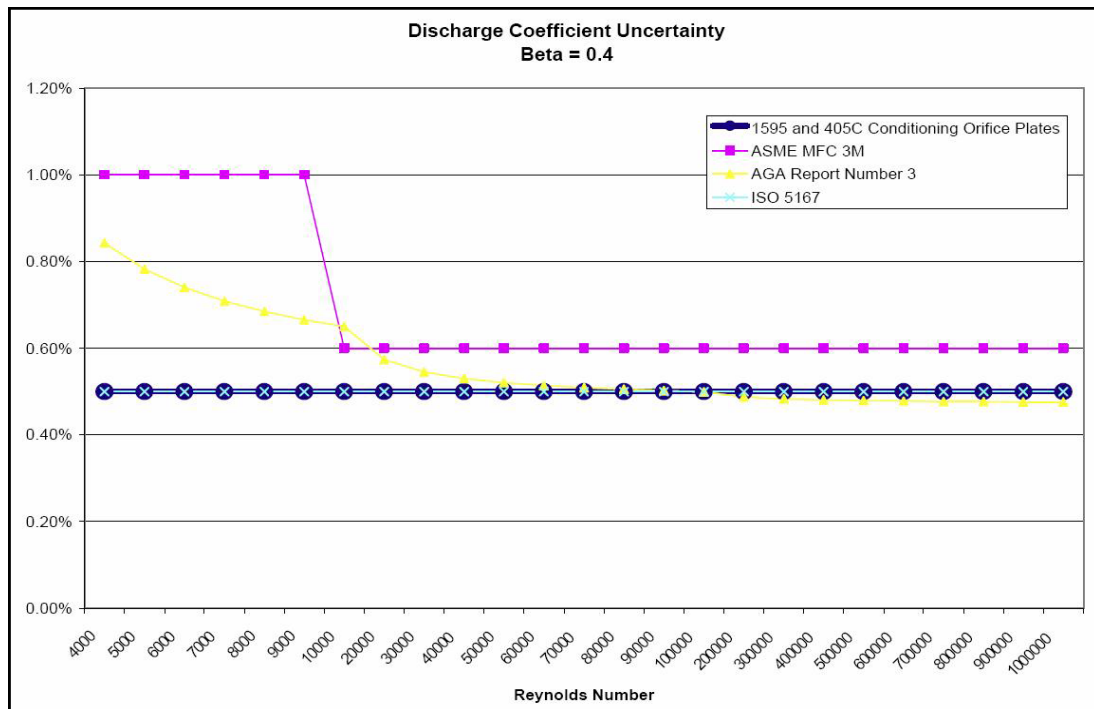

Graph 2: Discharge coefficient uncertainties for 0.65 beta

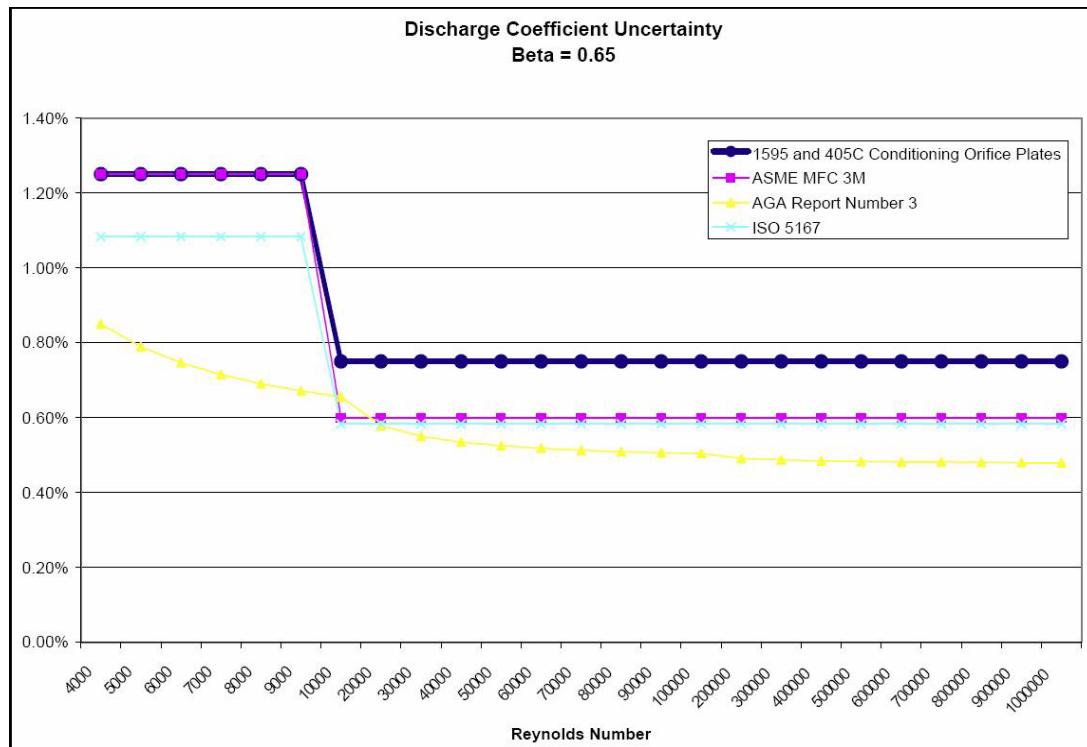

1.5 Summary

The Conditioning Orifice Plate is a revolutionary innovative technology based on the most common differential primary element in the industry. While not fully complying with the standards of AGA Report Number 3, ASME MFC 3M or ISO 5167, it is designed based on those standards and provides superior performance in short straight pipe run, tight fit applications with upstream flow disturbances.

- Requires 2 diameters upstream and 2 diameters downstream of a flow disturbance listed in [Table 1-3](#)
- Provides flexibility of flowmeter placement and design
- Reduces installation costs as compared to standard orifice plates
- Provides highly accurate and repeatable flow measurement
- Simplifies ordering and reduces inventory with only two betas to choose from on the 405C or three betas to choose from on the 1595
- Offers flexible solution for most gas, liquid, and steam applications

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which can be found at www.rosemount.com/terms_of_sale. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

*The Emerson logo is a trade mark and service mark of Emerson Electric Co.
Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc.
PlantWeb is a registered trademark of one of the Emerson Process Management group of companies.
All other marks are the property of their respective owners.
© 2014 Rosemount Inc. All rights reserved.*

**Emerson Process Management
Rosemount Division**
8200 Market Boulevard
Chanhassen, MN 55317 USA
T (U.S.) 1 800 999 9307
T (International) 952 906 8888
F 952 906 8889
www.rosemount.com

Rosemount Temperature GmbH
Frankenstrasse 21
63791 Karlstein
Germany
T 49 6188 992 0
F 49 6188 992 112

**Emerson Process Management Asia
Pacific Private Limited**
1 Pandan Crescent
Singapore 128461
T 65 6777 8211
F 65 6777 0947
Enquiries@AP.EmersonProcess.com

Emerson Process Management
No. 6 North Street
Hepingli, Dong Cheng District
Beijing 100013, China
T 86 10 6428 2233
F 86 10 6422 8586

**Emerson Process Management
Latin America**
1300 Concord Terrace, Suite 400
Sunrise Florida 33323 USA
Tel + 1 954 846 5030