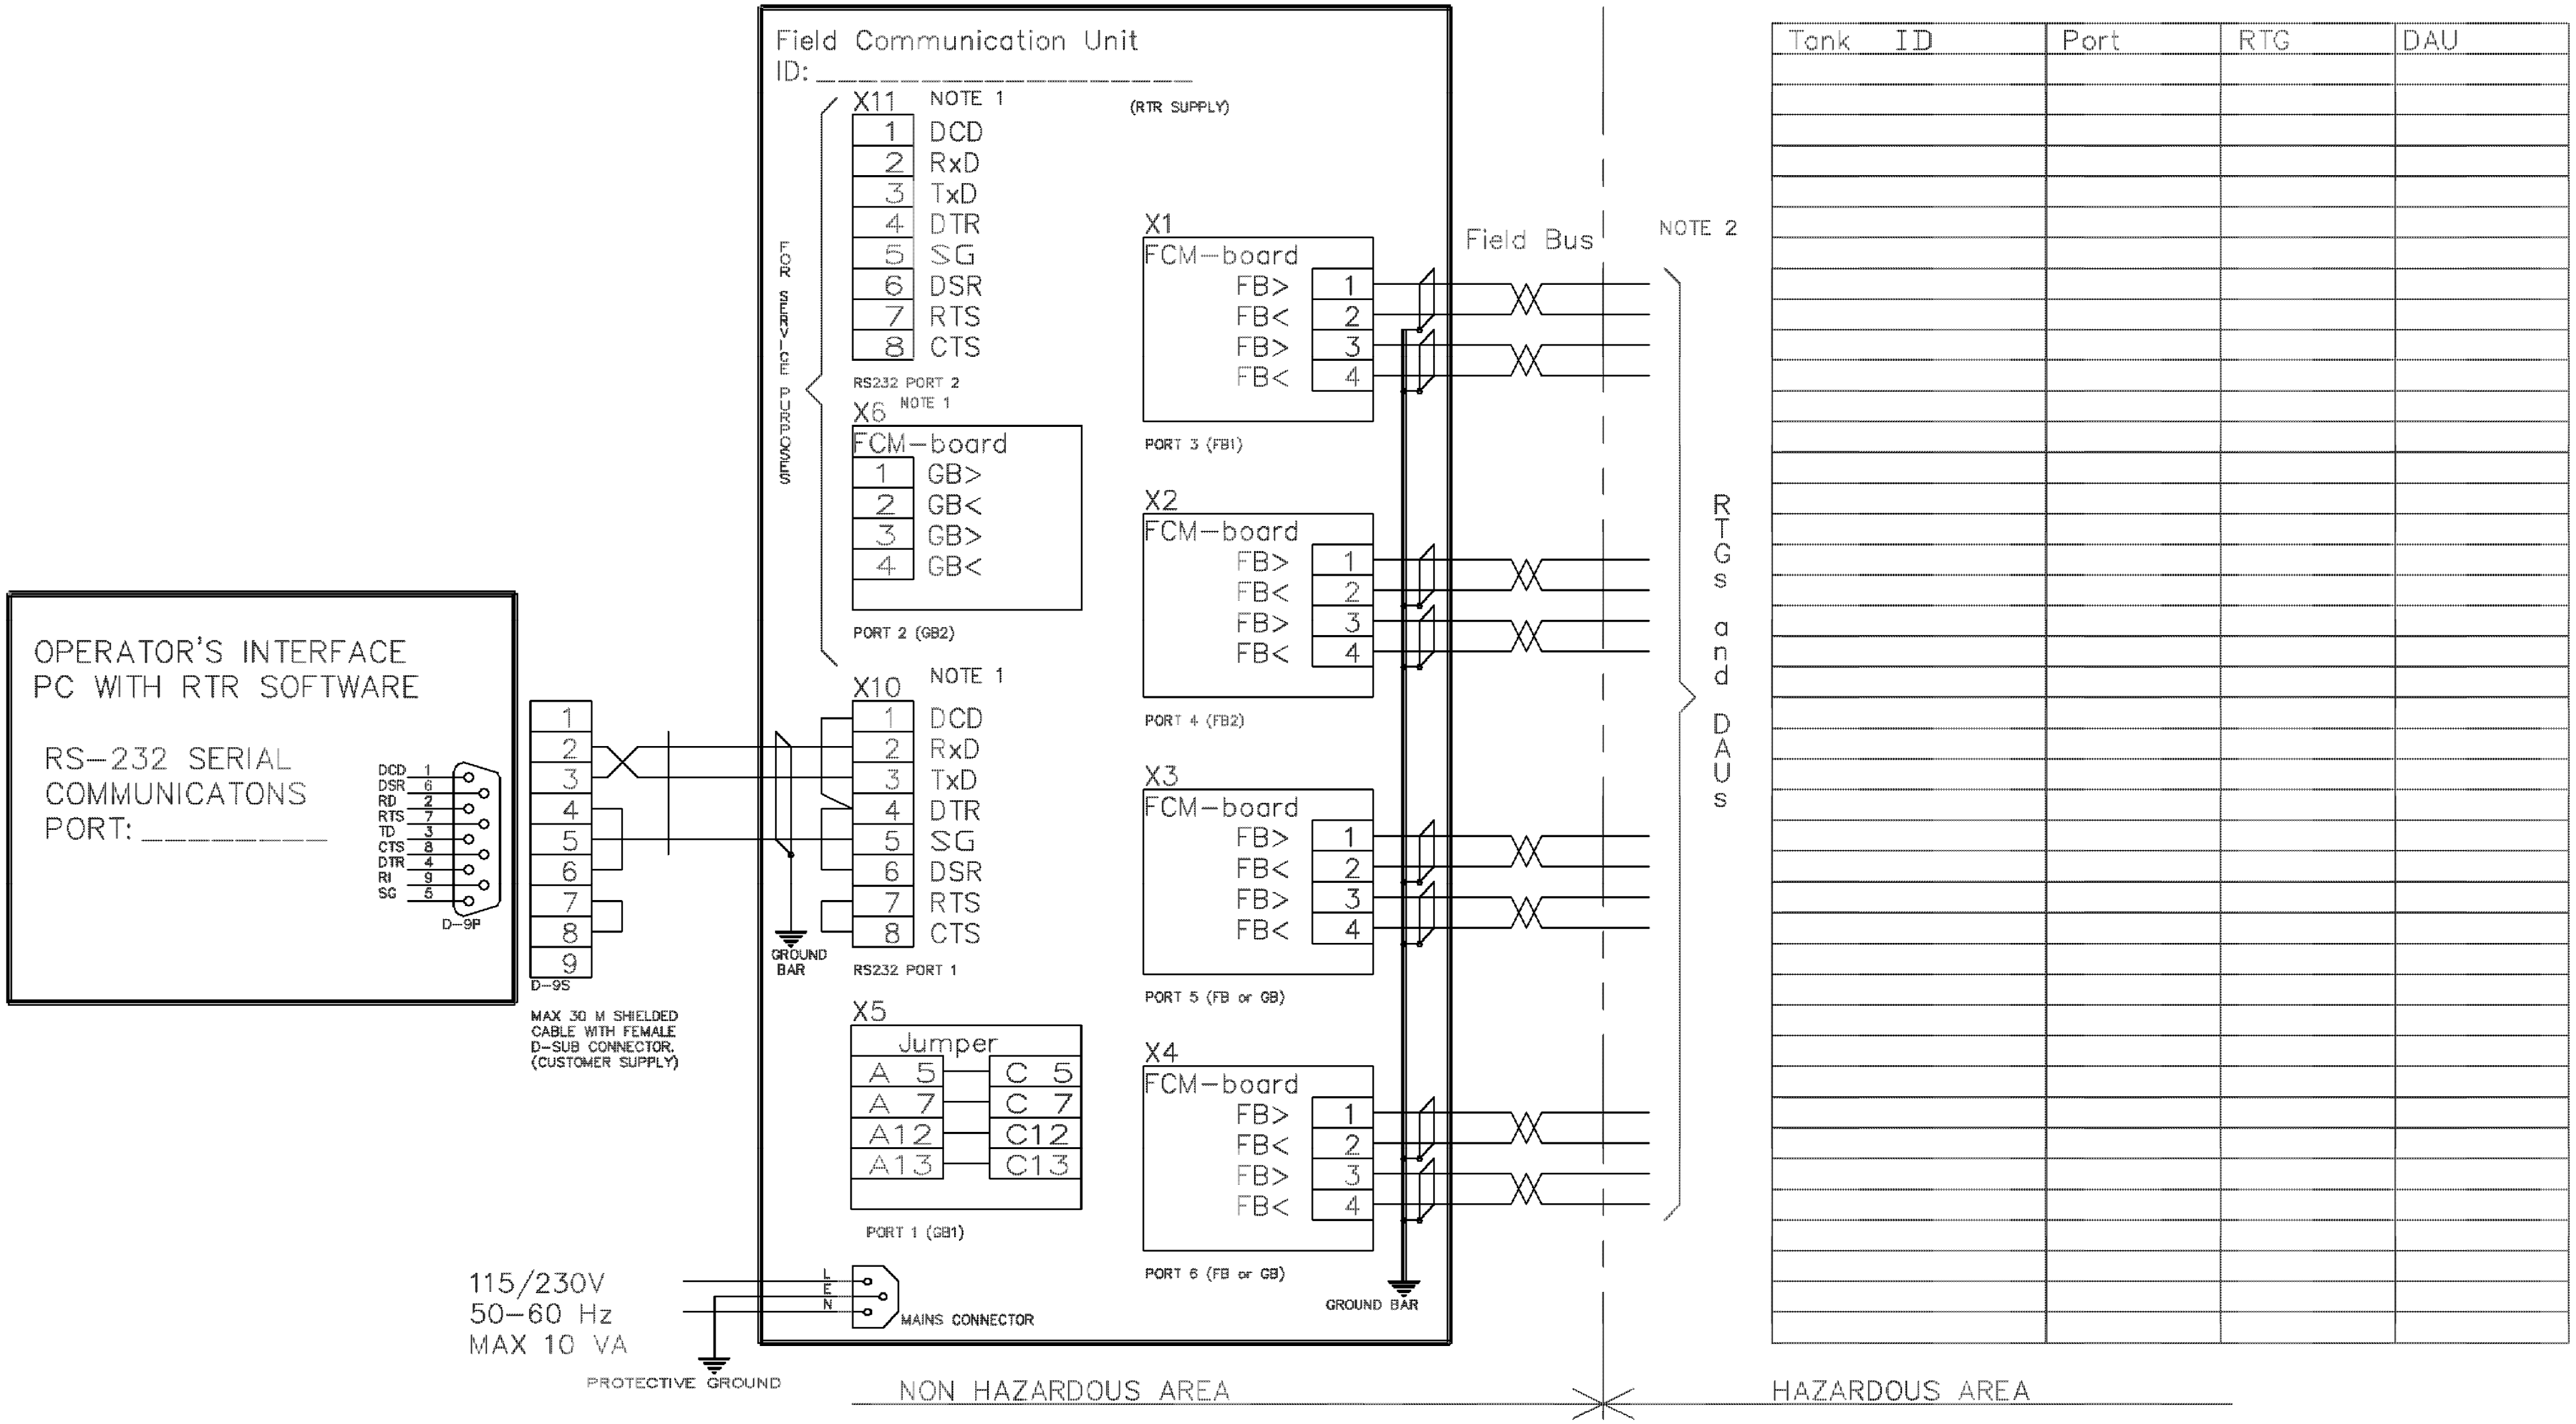

NOTE 1
WHEN A RS–232 PORT (X10 OR X11) IS BEEING USED, A SPECIAL JUMPER (9240 002–731) MUST BE PRESENT IN X5 OR X6 RESPECTIVELY.

NOTE 2
TRL/2 BUS. CUSTOMER SUPPLIED SINGLE TWISTED, PREFERABLY SHIELDED PAIR. INDIVIDUAL SHIELDING IS MANDATORY WHERE TWO BUSES RUN ALONGSIDE. MIN. AWG 20 – 0.5 SQMM. THE TWO WIRES MAY BE INTERCHANGED.

Product Discontinued

ISSUED BY	WEEK	PRODUCT CODE	FILE	INSTALLATION DRAWING TITLE
GKM	9137	REX	ACAD	EL.INSTALLATION DRAWING PC–FCU WITH RS232
APPROVED BY	WEEK	ORIGINAL DWG NO.	SCALE	
GKT	9137	9240 002–905		

ROSEMOUNT Tank Gauging

1 ST ANGLE	DOC TYPE	DWG NO.	ISSUE	SHEET
	2	9240 002–905	7	1/1

THE COPYRIGHT/OWNERSHIP OF THIS DOCUMENT IS AND WILL REMAIN OURS. THE DOCUMENT MUST NOT BE USED WITHOUT OUR AUTHORIZATION OR BROUGHT TO THE KNOWLEDGE OF A THIRD PARTY. CONTRAVENTION WILL BE PROSECUTED. ROSEMOUNT TANK RADAR AB, SWEDEN.