


## Data sheet

Sheet No.: BH 1.200.03 RevA

Date: October 2010

BHH and BHHF

# Actuator storage

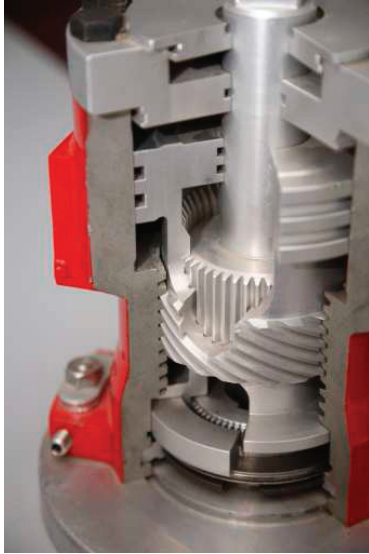

- For applications where a hydraulic actuator is not put into immediate service it is recommended the actuator be cycled (i.e. two complete strokes – one clockwise, one counterclockwise) a minimum of 5 times with regulated clean/dry pneumatic pressure once a month. Care should be taken to plug all open ports on the actuator and all controls to keep out foreign contaminants. Some plugged pressure ports need to be unplugged during each months cycling procedure to enable un-pressured areas to vent to atmosphere. After each cycling procedure is complete care should be taken to replace any removed plugs to keep out foreign contaminants during storage.
- Indoor storage, if available, is recommended. Actuators should not be stored in an atmosphere harmful to resilient seals.
- After long term storage the actuator may require the installation of a service kit before being placed into service.

Note: Not Certified dimensional drawings. Such drawings are available on request. Contact factory with correct model designation and serial number.  
Important: Due to Emerson's continuing commitment to engineered product advancement, data presented herein is subject to change.

The contents of the publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request.  
We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**BETTIS**<sup>®</sup>

[www.Bettis.com](http://www.Bettis.com)

Copyright © Emerson Process Management. The information in this document is subject to change without notice.  
Updated data sheets can be obtained from our website [www.bettis.com](http://www.bettis.com) or from your nearest Valve Automation Center.  
USA: +1 281 727 5300 Europe: +31 74 256 1010 Asia-Pacific: +65 6501 4600

  
**EMERSON**<sup>™</sup>  
Process Management