

Improving Ammonia Plant Performance with Process Gas Chromatographs

Process gas chromatographs have been used since the 1950s to provide real-time compositional data to process control systems. Today, there are tens of thousands of process gas chromatographs in use throughout the process industry making the gas chromatograph the analytical workhorse for online compositional measurements. One example of how process gas chromatographs are used for improving process operations can be found in the ammonia plant.

Commercial production of ammonia is an important part of a number of industries such as in the manufacture of nitrogenous fertilizers. It is also commonly used as a base component for manufacturing a wide range of explosives. Ammonia is also a popular refrigerant since it is easily liquefied by compression.

The Ammonia Plant

The manufacture of ammonia entails a number of chemical reactions that convert a hydrocarbon stream into a hydrogen-rich stream that is then reacted with the nitrogen in air to form the ammonia (NH₃). The hydro-carbon feed stream is almost always a natural gas stream although some feed streams of naphtha or other heavy oils are also used.

The feed stream is first run through a desulfurization reactor to remove sulfur and other compounds that damage the catalyst of the other reactors. Steam is then added to this treated stream before it enters the two reformer reactors that convert the hydrocarbons and water into hydrogen and carbon monoxide. This can be seen in the following chemical reaction:



Some of the CO will react with the water (steam) to form even more H₂:



Two reformers are used since only 30–40 % of the hydrocarbons are reformed in the first reactor. Air (N₂) that is needed for the final synthesis is added at the reformer stage so that any hydrocarbons and CO₂ in the air can be processed with the reformer effluent.

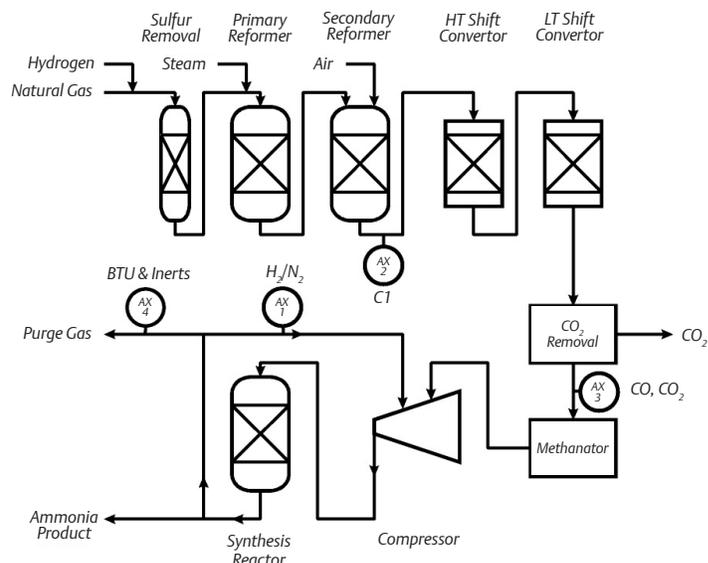


Figure 1 - Flow Diagram of a Typical Ammonia Plant

The gases exiting the reformers are primarily H₂, CO, CO₂ and any unreacted hydrocarbons (C1) in addition to the N₂ and O₂ from the air.

Before this stream can be converted to ammonia, the CO and CO₂ must be removed since they will ruin the catalyst in the ammonia reactors. The removal is done in three stages. The first is to "shift" the CO into CO₂ by the following reaction:



For maximum conversion, the shift reaction is done in two stages, one at a high temperature and the other at a lower temperature.

With 99+ % of the CO converted to CO₂, the next step is to run the stream through a CO₂ removal system that is often an amine absorber unit that selectively strips out the CO₂. Finally, any remaining CO₂ (and CO) is converted to methane in the methanator reactor.

With the removal of CO and CO₂, the stream is compressed to over 1500 psi. The stream then enters the final reactor where the conversion is made to ammonia by the following reaction:



Since only 30 % is converted on each pass through the synthesis reactor, a large recycle stream returns much of the effluent back to the compressor for re-processing. There is also a small purge gas stream that is removed from this recycle to control the build-up of inert gases that accumulate in the process. The purge gas is often used as a fuel gas to heat burners and furnaces in the plant.

Improving Unit Performance with Process Gas Chromatographs

There are a couple of key measurements that must be made to keep the ammonia plant operating efficiently. The most critical measurement (AX #1 in Figure 1) is the H₂ to N₂ ratio between the synthesis reactor and the compressor in the recycle stream. The ratio must be kept at the proper levels to get the maximum formation of ammonia at each pass.

Another important measurement (AX #2 in Figure 1) tracks methane conversion on the exit stream of the secondary reformer by measuring the C1 content.

The last two measurements (AX #3 and #4 in Figure 1) are occasionally seen when maximum operating efficiency is desired. Measuring the CO and CO₂ levels as they leave the CO₂ removal unit helps optimize that unit's performance. Finally, monitoring the purge gas helps keep the inert levels at an optimum level; typically 10–15 %. This analyzer can also measure the BTU content if the purge gas is being used as a fuel for process heaters. A summary of these applications can be seen in Figure 2.

The Emerson Solution

Emerson has a long history of providing process gas chromatographs for the ammonia industry. Emerson's process gas chromatographs have set the standard for on-line process measurement by supplying analyzers that are both robust and capable of handling the analytical requirements.

Table 1 - Summary of Process Gas Chromatograph Applications in a Typical Ammonia Plant

Analyzer #	Stream	Components Measured	Measurement Objective
1	Synthesis gas recycle	H ₂ , N ₂	Maintain H ₂ to N ₂ ratio for optimum synthesis conversion
2	Feed to CO ₂ scrubber	C1	Monitor for unconverted C1
3	Exit of CO ₂ scrubber	CO, CO ₂ and CO ₂	Monitor for complete removal of CO
4	Purge gas	Inerts and BTU	Optimize purge gas rates and track BTU for use as fuel gas

www.RosemountAnalytical.com

 www.analyticexpert.com

 www.youtube.com/user/RosemountAnalytical

 www.twitter.com/RAIhome

 www.facebook.com/EmersonRosemountAnalytical

©2013 Emerson Process Management. All rights reserved.

Emerson Process Management
 Rosemount Analytical
 Analytical Center of Excellence
 10241 West Little York, Suite 200
 Houston, TX 77040 USA
 Toll Free 866 422 3683
 T +1 713 396 8880 (North America)
 T +1 713 396 8759 (Latin America)
 F +1 713 466 8175
gc.csc@emerson.com

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount Analytical is a mark of one of the Emerson Process Management family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.