


# Rosemount 975HR

## Multi-spectrum Infrared Hydrogen Flame Detector

The Rosemount 975HR Multi-spectrum Infrared Hydrogen Flame Detector is specifically designed for detection of hydrocarbon and hydrogen flames. It detects hydrocarbon-based fuel and gas fires at long distances with the highest immunity to false alarms. The 975HR can detect a gasoline pan fire at 215 ft (65m) or a hydrogen flame at 125 ft (38 m) in less than 5 seconds.

The Rosemount 975HR is the most durable and weather resistant flame detector on the market. Its features include a heated window to eliminate condensation and icing, HART®, lower power requirements and a compact lighter design.

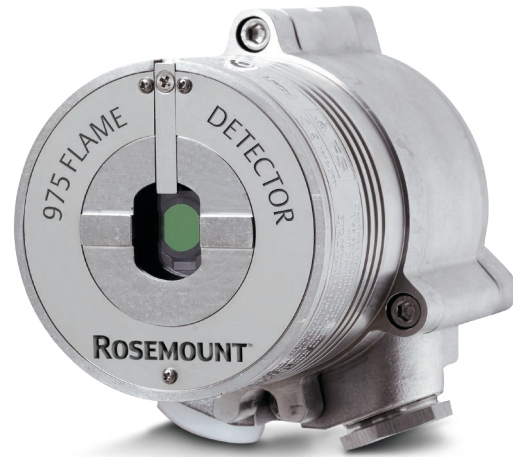

*Rosemount 975HR Multi-spectrum Infrared Hydrogen Flame Detector.*

### Features & Benefits

- Multi spectrum design - for long distance detection of hydrocarbons and hydrogen flames
- High false alarm immunity
- Sensitivity selection - to ensure no zone crossover detection
- Automatic and Manual Built-In-Test (BIT) - to assure continued reliable operation
- Heated window - for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
  - Relays (3) for Alarm, Fault and Auxiliary
  - 0–20 mA (stepped)
  - HART® Protocol for maintenance and asset management
  - RS-485, Modbus Compatible
- High Reliability - MTBF - minimum 150,000 hours
- Approved to Safety Integrity Level 2 (SIL2 – TÜV)
- 5-Year Warranty
- User Programmable via HART® or RS-485

### Applications

- Oil & Gas - Offshore & Onshore process facilities
- Chemical plants
- Petrochemicals plants
- Storage Tank farms
- Aircraft hangars
- Power Generation facilities
- Pharmaceutical Industry
- Automotive
- Explosives & Ammunition
- Waste Disposal facilities
- Hydrogen Fuel Cell Industry

## Specifications

Table 1 - Rosemount 975HR Multi-spectrum Infrared Hydrogen Flame Detector

General Specifications						
<b>Spectral Response</b>	Multi IR Bands					
<b>Detection Range</b> (at highest Sensitivity Setting for 1 ft <sup>2</sup> (0.1 m <sup>2</sup> ) pan fire)	<b>Fuel</b>	<b>ft / m</b>	<b>Fuel</b>	<b>ft / m</b>	<b>Fuel</b>	<b>ft / m</b>
	n-Heptane	215 / 65	Ethanol	135 / 40	LPG*	150 / 45
	Gasoline	215 / 65	Methanol	115 / 35	Polypropylene Pellets	115 / 35
	Diesel Fuel	150 / 45	IPA (Isopropyl Alcohol)	135 / 40	Ammonia**	60 / 18
	JP5	150 / 45	Hydrogen*	125 / 38	Silane**	7 / 2
	Kerosene	150 / 45	Methane*	150 / 45	Office Paper	82 / 25
	*30" (0.75 m) high, 10" (0.25 m) width plume fire					
	**20" (0.5 m) high, 8" (0.2 m) width plume fire					
<b>Response Time</b>	Typically 5 s					
<b>Adjustable Time Delay</b>	Up to 30 s					
<b>Sensitivity Ranges</b>	4 Sensitive ranges for 1 ft <sup>2</sup> (0.1 m <sup>2</sup> ) n-heptane pan fire from 50 ft (15m) to 215 ft (65 m)					
<b>Field of View</b>	Horizontal 67°, Vertical 70° for Gasoline Horizontal 80°, Vertical 80° for Hydrogen					
<b>Built-in-Test (BIT)</b>	Automatic (and Manual)					
<b>Temperature Range</b>	Operating: -67 °F to +167 °F (-55 °C to +75 °C) Option: -67 °F to +185 °F (-55 °C to +85 °C) Storage: -67 °F to +185 °F (-55 °C to +85 °C)					
<b>Humidity</b>	Up to 95 % non-condensing (withstands up to 100 % RH for short periods)					
<b>Heated Optics</b>	To eliminate condensation and icing on the window					
Electrical Specifications						
<b>Operating Voltage</b>	24 VDC nominal (18–32 VDC)					
<b>Power Consumption</b>	Standby: Max. 90 mA (110 mA with heated window) Alarm: Max. 130 mA (160 mA with heated window)					
<b>Cable Entries</b>	2 x ¾" - 14 NPT conduits or 2 x M25 x 1.5 mm ISO					
<b>Wiring</b>	12–22 AWG (0.3 mm <sup>2</sup> –2.5 mm <sup>2</sup> )					
<b>Electrical Input Protection</b>	According to MIL-STD-1275B					
<b>Electromagnetic Compatibility</b>	EMI/RFI protected to EN 61326-3 and EN 61000-6-3					
<b>Electrical Interface</b>	The detector includes twelve (12) terminals with five (5) wiring options (factory set)					
Outputs						
<b>Relays</b>	Alarm, Fault, and Auxiliary SPST volt-free contacts rated 2 A at 30 VDC					
<b>0–20 mA (stepped)</b>	Sink (source option) configuration Fault: 0 +1 mA                      Normal: 4 mA ±10 %                      Alarm: 20 mA ±5 % BIT Fault: 2 mA ±10 %                      Warning: 16 mA ±5 %                      Resistance Loop: 100–600 Ω					
<b>HART® Protocol</b>	Optional HART® communications on the 0–20 mA analog current (FSK) - used for maintenance, configuration changes and asset management, available in mA source output wiring options					
<b>RS-485</b>	RS-485 Modbus compatible communication link that can be used in computer controlled installations					
Mechanical Specifications						
<b>Materials</b>	Stainless Steel 316L with electro polish finish					
<b>Mounting</b>	Stainless Steel 316L with electro polish finish					
<b>Dimensions</b>	Detector 4" x 4.6" x 6.18" (101.6 x 117 x 157 mm)					
<b>Weight</b>	Detector (stainless steel 316L) 6.1 lb (2.8 kg) Tilt mount 2.2 lb (1.0 kg)					
<b>Environmental Standards</b>	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical Shock, High Temp, Low Temp					
<b>Water and Dust</b>	IP66 and IP67 per EN 60529, NEMA 250 6P					

Approvals							
<b>Hazardous Area</b>	<table border="0" style="width: 100%;"> <tr> <td style="width: 30%;"><b>ATEX and IECEx</b></td> <td style="width: 35%;">Ex II 2 GD, Ex d e IIC T5 Gb Ex tb IIIC T96 °C Db (-55 °C ≤ Ta ≤ +75 °C)</td> <td style="width: 35%; text-align: right;">Ex d e IIC T4 Gb Ex tb IIIC T106 °C Db (-55°C ≤ Ta ≤ +85°C)</td> </tr> <tr> <td><b>FM/FMC/CSA</b></td> <td colspan="2">Class I Div. 1, Groups B, C, &amp; D Class II/III Div.1, Groups E, F &amp; G</td> </tr> </table>	<b>ATEX and IECEx</b>	Ex II 2 GD, Ex d e IIC T5 Gb Ex tb IIIC T96 °C Db (-55 °C ≤ Ta ≤ +75 °C)	Ex d e IIC T4 Gb Ex tb IIIC T106 °C Db (-55°C ≤ Ta ≤ +85°C)	<b>FM/FMC/CSA</b>	Class I Div. 1, Groups B, C, & D Class II/III Div.1, Groups E, F & G	
<b>ATEX and IECEx</b>	Ex II 2 GD, Ex d e IIC T5 Gb Ex tb IIIC T96 °C Db (-55 °C ≤ Ta ≤ +75 °C)	Ex d e IIC T4 Gb Ex tb IIIC T106 °C Db (-55°C ≤ Ta ≤ +85°C)					
<b>FM/FMC/CSA</b>	Class I Div. 1, Groups B, C, & D Class II/III Div.1, Groups E, F & G						
<b>Performance</b>	EN 54-10 (VdS) FM 3260						
<b>Reliability</b>	IEC 61508 - SIL 2 (TÜV)						

Accessories	
<b>Flame Simulator Kit</b>	00975-9000-0013
<b>Tilt Mount</b>	00975-9000-0001
<b>Duct Mount</b>	00975-9000-0002
<b>U-Bolt/Pole Mount</b>	0975-9000-0007 (2" pole) 00975-9000-0008 (3" pole)
<b>USB RS485 Harness Kit</b>	00975-9000-0011
<b>Weather Protector</b>	Plastic: 00975-9000-0003 Stainless Steel: 00975-9000-0004
<b>Air Shield</b>	00975-9000-0005
<b>Cone Viewer Kit</b>	00975-9000-0006

[www.Emerson.com/RosemountFlameGasDetection](http://www.Emerson.com/RosemountFlameGasDetection)



[YouTube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)



[Analyticexpert.com](http://Analyticexpert.com)



[Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)



[Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

#### **Americas**

##### **Emerson Automation Solutions**

6021 Innovation Blvd.  
Shakopee, MN 55379  
USA

T + 1 866 347 3427  
F + 1 952 949 7001

[Safety.CSC@Emerson.com](mailto:Safety.CSC@Emerson.com)

#### **Europe**

##### **Emerson Automation Solutions AG**

Neuhofstrasse 19a P.O. Box 1046  
CH-6340 Baar  
Switzerland

T + 41 (0) 41 768 6111  
F + 41 (0) 41 768 6300

[Safety.CSC@Emerson.com](mailto:Safety.CSC@Emerson.com)

#### **Middle East & Asia**

##### **Emerson Automation Solutions**

Emerson FZE  
Jebel Ali Free Zone  
Dubai, UAE

P.O. Box 17033  
T + 971 4 811 8100  
F + 971 4 886 5465

[Safety.CSC@Emerson.com](mailto:Safety.CSC@Emerson.com)

#### **Asia Pacific**

##### **Emerson Automation Solutions**

1 Pandan Crescent  
Singapore 128461  
Singapore

T + 65 777 8211  
F + 65 777 0947

[Safety.CSC@Emerson.com](mailto:Safety.CSC@Emerson.com)

©2017 Emerson Automation Solutions. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.