

# Bristol® Standard Asynchronous/Synchronous Protocol (BSAP)

Bristol® Standard Asynchronous/Synchronous Protocol (BSAP), from Emerson Process Management, is a poll oriented communication protocol for horizontal, vertical, and multi-layer networks. BSAP provides a complete communication framework for all of Emerson's ControlWave® products. BSAP is equally well suited to both synchronous high-speed local networks and asynchronous low-speed wide area networks.


## Features

- Compatible with SCADA and LAN networks
- ISO 1745/2111/2629 compliant
- Tree topology network
- Up to 6 network levels
- Up to 127 nodes from each node at a level
- Polled network
- Local and global addressing
- Peer-to-peer and RDB modes
- Report by exception
- Automatic alarm handling
- Network time synchronization
- 16-bit CRC-CCITT error checking
- Communication statistics and diagnostics

BSAP offers a high level of message security that is required for phone line and radio networks through the use of 16-bit CRC-CCITT error checking, handshaking, and extensive communication statistics reporting. The polling scheme employed by BSAP ensures that each node in the network has an equal opportunity to be polled and to respond. In addition, no node can dominate the network communication. BSAP supports both local and global addressing to all ControlWave nodes on a network.

## Network Topology

At the top of the network is the network master, also known as a host. The host is typically a personal computer or mini computer performing graphical user interface functions. The host normally connects to one or more process controllers. These process controllers are commonly referred to as a data concentrators or communications front ends. Each process controller can act as a master node and communicate with up to 127 slave nodes. Each of these slave nodes can act as a master node for another level of up to 127 additional slave nodes. This hierarchy can extend up to six levels deep.

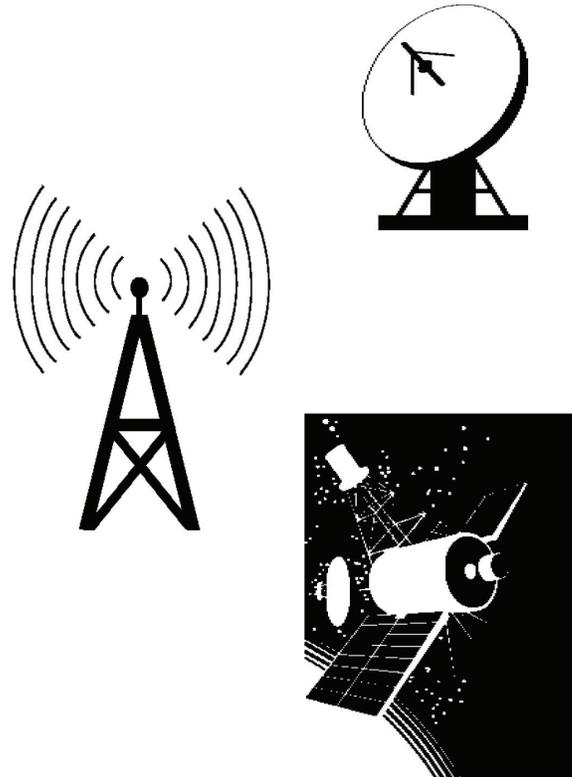

Each intermediate node has both master and slave capability through separate communication ports. This architecture lends itself very well to the typical geographical distribution of controllers in most SCADA system applications. It also allows multiple asynchronous communications to occur throughout the network since each network branch can communicate simultaneously.

## Local and Global Addressing

The host has the ability to communicate locally to its attached node or through its attached node to any other node in the network.

In addition, a computer attached to a lower level node through a pseudo-slave port has access to all of the data stored in any other node in the network except for alarm data. However, this computer has access to the alarm data from its attached node and any nodes below it. Each Bristol process controller can support connections with multiple personal computers.

In some systems it is convenient to have the data from all nodes collected by the top level node. This node is commonly referred to as a data concentrator. After the data is gathered, the host communicates to the data concentrator only to gather all network data.

Other systems can be configured to communicate through the data concentrator directly to the slave nodes. This communication mode is called Remote Data Base access (RDB). Many systems will be configured to utilize both techniques, thus maximizing communication efficiency as well as ease of implementation.

Since BASP provides multi-message capability which is essentially transparent to the user, it is possible to connect a computer to any node in the network and communicate with the attached node or with any other node in the network. This capability includes data collection, command changes, and reconfiguration and downloading of ACCOL and ControlWave control strategies. In fact, all of these communications can be occurring simultaneously, without interference, within the network.

## Peer to Peer Communication

Peer to peer communication is a mechanism for transferring data blocks, such as signal lists and data arrays, between any two adjacent nodes in a network. Peer to peer communication uses master/slave and client/server software modules (which should not be confused with BSAP master/slave communication).

A BSAP slave may have a master software module and a BSAP master may have a slave software module. Master software modules execute periodically at the rate of the program task in which they are included. Once a master software module executes, the message request is passed off to BSAP for communication. Slave modules execute asynchronously with respect to tasks. When a command is received from a master module, it is executed immediately.

## Remote Database Access

Remote Data Base (RDB) communication is used for reading and writing of individual variables. Individual variables may be requested by name or by physical address within the node. RDB can also be used to read or write data arrays and data array elements. RDB requests for data and commands are initiated by the host computer. There are no function blocks required to pass RDB messages throughout the network. In many cases network communication is structured to use peer-to-peer communication for data collection and RDB communication for commands.

RDB is implemented such that the host computer reads a variable by name the first time that variable is requested. The response to the request includes the memory address in the node which contains the value of the variable. All further communications to the node requesting that variable will be made using the memory address rather than variable name. Reading by address requires less communication overhead

than reading by variable name and reduces communication time.

## Report By Exception

Report By Exception (RBE) provides an effective technique to maximize communication efficiency. Since RBE reduces network communication traffic it is particularly useful in low speed SCADA systems communicating over modem and radio networks. When RBE is enabled, a node will respond to a poll by transmitting only the values that have changed since the last poll and any alarms. RBE communication is selectable on an individual variable basis.

It is possible and often advantageous to mix communication modes within the same system and even in the same node. For example, historical data may be passed up the network to the data concentrator using peer to peer, commands from the host computer will be sent down the network to the destination node by RDB, and display data may be gathered on an RBE basis.

## Alarm Handling

ACCOL and ControlWave alarm signals produce buffered, time stamped alarm messages which are automatically transferred up the network to the host computer. When a node is polled by its master it will, if requested, respond with an alarm message, with time/date stamp, that have been posted since the last poll. Alarm reports have a higher communication priority than all other messages cued to go up the network. Each node contains space to buffer alarm messages from nodes below it. If the buffer becomes full due to a communication failure at a higher level the node will not permit additional alarm message transfer from its slave nodes. The slave nodes will then begin buffering alarm messages. This throttling effect is used to prevent a node from becoming overwhelmed with alarm messages at any one time.

Individual alarms may be acknowledged by an operator at the host computer. This activity will send the acknowledged status down the network to the node initiating the alarm. BSAP also supports alarm report initialization. This feature, initiated by the host computer, will instruct all nodes in the network to report all current alarms that are unacknowledged.

## Time Synchronization

The Time Synchronization/Node Routing Table (TS/NRT) combined message enables each node in the network to know the topology of the network including the nodes unique global address and current time and date. The TS/NRT message emanates from the host computer to the top level node which in turn broadcasts it to its slave nodes which send it to their slave nodes. A network may have only one master capable of issuing a TS/NRT ensuring the entire network is in sync.

## Polling Philosophy

Each node in the network, except the lowest level nodes, is both a master to the nodes below it and a slave to the master node above it. A master node sends data request messages to the slave nodes then periodically polls its slave nodes for alarms and response data messages. The polling philosophy used maintains four types of polls to maximize throughput by minimizing extraneous communication. The four poll types are:

- Main Poll
- Reactivation Poll
- Preferred poll
- Dead node poll

The main poll loop interrogates each slave at the start of each poll period to determine if it is alive and if it has any response messages. A live slave which responds with a data message becomes a candidate for a preferred poll. If the slave responds but has no messages it will be ignored until the next main polling cycle. If a slave node fails to respond to three consecutive polls it is assumed dead and will be subject to reactivation polling.

The reactivation poll is attempted only once per polling cycle to determine if a known dead slave has come alive. One dead slave is polled each polling cycle on a rotating basis to ensure that every dead slave node gets an equal chance to respond. If a dead node responds its status is changed to live and becomes a member of the main poll loop.

The preferred poll loop interrogates, on a round robin basis, all of the slaves that responded to the main poll or reactivation poll with data messages. Responding slave nodes will continue to be polled in sequential address order until the end of the poll period or until there are no more response messages.

If there is time left after the preferred poll, the dead poll loop is used to give any remaining dead nodes an opportunity to advise the master that they are alive.

## Poll Periods

Each communication line within a network has a user defined poll period configurable from .1 sec. The poll period is the minimum time between each main polling cycle of the slave nodes from the master node. It is a function of the number of slave nodes, baud rate, physical link (i.e. leased line, dial line, radio, RS 485, coax, or fiber), message type and the number of analog and discrete values to be transmitted. The following table shows the relative rates assuming a master communicating 20 analog signals and 40 discrete values from each of ten slave nodes. The total time is the time required to communicate all values from all 10 slaves and includes 25% spare time for alarms.


## Message Security

BSAP employs 16 bit CRC-CCITT error checking to ensure message security. This 16 bit CRC technique catches all single and double errors, all errors with an odd number of bits, all burst errors of 16 or less, 99.997% of 17-bit error bursts, and 99.998% of 18-bit and longer bursts. These statistics are based upon pure bit data. Since BSAP is a message structure with handshaking and additional diagnostics, the overall security is even greater than stated.

All Bristol RTUs retain on-line statistics reflecting the integrity of all communication transactions. An independent set of statistics is maintained for each communication line (serial port) at each node.

The embedded handshaking of message communication in BSAP provides an additional level of security by ensuring that messages are not assumed to have arrived at their destination. All messages initiated by a node are acknowledged by the receiving node. If an acknowledgment is not received the message is assumed not to have arrived. Also, a unique serial number is assigned to all messages to ensure that a response is matched to a specific request.

Within a network it is essential that certain communications take precedent over others. BSAP prioritizes communication messages such that commands being sent down the network, i.e. to change set points or turn outputs on or off, have the highest priority and interrupt the normal polling cycle. Alarms have the highest priority of all messages traversing up the network but do not interrupt the normal polling cycle.

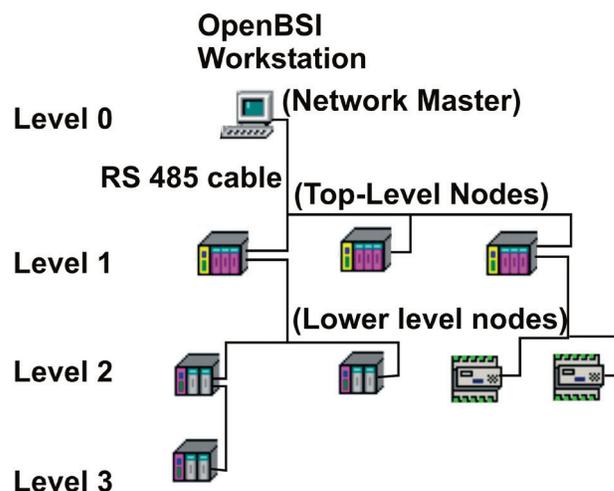

**BSAP**

| <b>Standards</b>  |                                   |                         |                          |            |
|---|-----------------------------------|-------------------------|--------------------------|------------|
| ISO 1745  | Asynchronous character orientated |                         |                          |            |
| ISO 2111  | Transparent messages              |                         |                          |            |
| ISO 2629  | Conversational mode               |                         |                          |            |
| <b>Protocol layering</b>  |                                   |                         |                          |            |
| Physical level  |                                   |                         |                          |            |
| Link level  |                                   |                         |                          |            |
| Network level   |                                   |                         |                          |            |
| Transport end-to-end  |                                   |                         |                          |            |
| <b>Message Length</b>   |                                   |                         |                          |            |
| Variable up to 253 bytes  |                                   |                         |                          |            |
| <b>Data Length</b>  |                                   |                         |                          |            |
| Analog  | 4 bytes (floating point)          |                         |                          |            |
| Logical   | 1 byte                            |                         |                          |            |
| Packed logical  | 8 values/byte                     |                         |                          |            |
| Alarm time stamp  | 5 bytes                           |                         |                          |            |
| Alarm data  | 6 to 10 bytes                     |                         |                          |            |
| <b>Polling Period</b>   |                                   |                         |                          |            |
| Baud Rate   | Message Type                      | Recommended Poll Period | Required Number of Polls | Total Time |
| 1200 baud leased line   | RDB                               | 24.5 sec                | 2                        | 49 sec     |
| 1200 baud leased line   | peer to peer                      | 18.8 sec                | 1                        | 18.8 sec   |
| 1200 baud radio   | RDB                               | 39.8 sec                | 2                        | 59.6 sec   |
| 1200 baud radio   | peer to peer                      | 34.1 sec                | 1                        | 34.1 sec   |
| 9600 baud   | RDB                               | 3.1 sec                 | 2                        | 6.2 sec    |
| 9600 baud   | peer to peer                      | 2.4 sec                 | 1                        | 2.4 sec    |
| 1 Mbaud   | RDB                               | 0.2 sec                 | 2                        | 0.4 sec    |
| 1 Mbaud   | peer to peer                      | 0.2 sec                 | 1                        | 0.2 sec    |
| <b>Addressing</b>   |                                   |                         |                          |            |
| Local and global  |                                   |                         |                          |            |
| <b>Network Levels Supported</b>   |                                   |                         |                          |            |
| 6 levels  |                                   |                         |                          |            |
| <b>Nodes per level</b>  |                                   |                         |                          |            |
| Up to 127 nodes from each existing node at a level. In a property configured network, one level could contain several thousand nodes. |                                   |                         |                          |            |
| <b>Communication Modes</b>  |                                   |                         |                          |            |
| Peer to peer  |                                   |                         |                          |            |
| Remote Data Base access (RDB)   |                                   |                         |                          |            |
| Report By Exception (RBE)   |                                   |                         |                          |            |

---

**Alarm Handling**

Automatic

---

**Message Security**

16-bit CRC-CCITT

---

**Supported Serial Communication rates**

Asynchronous-300baud to 115K baud

---

**Line Media Supported**

RS 332, RS 485 multi-drop

---

Leased phone line

---

Dial up phone line

---

Satellite

---

Ethernet

---

Cellular

---

## Headquarters:

**Emerson Process Management**  
Remote Automation Solutions  
6005 Rogerdale Road  
Houston, TX 77072 U.S.A.  
T +1 281 879 2699 | F +1 281 988 4445  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

## Europe:

**Emerson Process Management**  
Remote Automation Solutions  
Unit 8, Waterfront Business Park  
Dudley Road, Brierly Hill  
Dudley UK DY5 1LX  
T +44 1384 487200 | F +44 1384 487258  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

## North American/Latin America:

**Emerson Process Management**  
Remote Automation Solutions  
6005 Rogerdale Road  
Houston TX USA 77072  
T +1 281 879 2699 | F +1 281 988 4445  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

## Middle East/Africa:

**Emerson Process Management**  
Remote Automation Solutions  
Emerson FZE  
P.O. Box 17033  
Jebel Ali Free Zone – South 2  
Dubai U.A.E.  
T +971 4 8118100 | F +971 4 8865465  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

## Asia-Pacific:

**Emerson Process Management**  
Remote Automation Solutions  
1 Pandan Crescent  
Singapore 128461  
T +65 6777 8211 | F +65 6777 0947  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

© 2007-2013 Remote Automation Solutions, a business unit of Emerson Process Management. All rights reserved.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions, a business unit of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow, Helicoid, OpenEnterprise, and METCO are trademarks of Remote Automation Solutions. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. Remote Automation Solutions reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by Remote Automation Solutions' terms and conditions which are available upon request. Remote Automation Solutions does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Remote Automation Solutions product remains solely with the purchaser and end-user.