

# Paine 225-10-0X0 Series

Digital, RS-485, Rugged, Immersion, +150 °C, Temperature Probe



The 225-10-0X0 Series is our digital direct media temperature probe designed for temperature measurements up to +302 °F (+150 °C). Providing real time digital accuracy and rapid temperature detection, our 225-10-0X0 Series is well suited for continuous monitoring of remote fluid, material and equipment temperatures.

Along with it's small package size, our 225-10-0X0 Series provides designers with an easy installation offering greater performance in limited spaces.

## Solutions

- Digital Accuracy.
- Immersion Design for Rapid Response.
- All-Welded, Sealed Construction.
- Harsh/Extreme Environment Ready.
- Longer/Simpler Network Connections.
- MIL-DTL-38999 Connector Option.

## Potential Applications

- Fuel and Hydraulic Temperature Monitoring.
- Industrial and Petroleum Process Temperature Monitoring.
- Heavy Equipment/Off-Road Vehicle Hydraulic Monitoring.
- Well Bore Fluid Temperatures.
- Subsea Riser Temperatures.

## Features

- **Full Direct Media/Inflow Style Measurement.**
- **Operating Temperature:** -40 °F to +302 °F (-40 °C to +150 °C).
- **Digital Output:** RS-485, 19.2k Baud.
- **Temperature Total Error Band:** 0.05% over the calibrated temperature range.
- **Temperature Output:** °F or °C.
- **Media Compatibility:** Alloy 725 solution annealed and aged to maximum hardness of 43 HRC.

## Specifications

**Calibration:** Calibration Certificates are supplied with each unit and available on-line.

### Performance

**Temperature Total Error Band:** ± 0.5 °F over the calibrated temperature range.

**Response Time:** 50% of temperature delta: 1 second, 90% of temperature delta: 4.5 seconds.

**Temperature Output:** °F or °C. User selectable.

**Temperature Resolution:** See [225-10-0X0 Transducer series table](#).

### Environmental

**Operating Temperature Range:** See [225-10-0X0 Transducer series table](#).

**Calibrated Temperature Range:** 32 °F to +212 °F (-1 °C to +100 °C).

## Contents

[Specifications](#)..... 2      [Dimensional Drawings](#) ..... 4

## Mechanical

**Pressure Range:** Contact factory for additional pressure ranges.

225-10-0X0 Transducer series table			
Paine part number:	Temperature range	Temperature resolution	Input Current
225-10-010-01	-40 °F to +250 °F (-40 °C to +121 °C)	12 bits minimum, better than 0.05 °F	20mA maximum at 5 VDC
225-10-020-01	-40 °F to +302 °F (-40 °C to +150 °C)	16 bits minimum, better than 0.05 °F	60mA maximum at 5 VDC

**Material:** Alloy 725 solution annealed and aged to maximum hardness of 43 HRC.

**External Pressure Rating From Hex to Tip of Probe:** 5,000 PSI maximum.

**Pressure Fitting:** 1/2-20 UNF 3A. Designed for use with 3-905 size O-ring.

**Installation Information:** Manifold/Immersion in-flow mount.

## Electrical

**Input Voltage:** +5.00 VDC; ± 0.25 VDC.

**Overvoltage Protection:**

- **225-10-010-01** is not protected.
- **225-10-020-01** is protected from damage to 24 VDC with supply current limited to 60 ma max.

**Reverse Polarity:** Power In and Power Return are protected from the application of reverse polarity.

**Input Current:** See [225-10-0X0 Transducer series table](#).

**Excitation Return and Communication Return<sup>(1)</sup>:** Internally connected. Customer power supply ground and communication ground must be tied together.

**Digital Output:** RS-485.

**Insulation Resistance:** All conductors together to case. 100 M Ω minimum at 50 VDC @ +75 °F (23 °C) ±10 °F.

**Electrical Connections:**


- **225-01-010-01:** 6 Pin bayonet locking electrical connector. Mates with MS3476W10-6S. (Paine P/N: 247-99-101-01 sold separately).
- **225-01-020-01:** 6 Pin circular threaded MIL-DTL-38999 series connector (D38999/25YA35PN). Mates with Paine part number 247-99-102-01 (Connector w/Strain Relief) sold separately.

**User Guide and Programming:** Paine document 225-10-005 provided.

1. Communication return is required.

# Dimensional Drawings

Figure 1. 225-10-0X0 Series

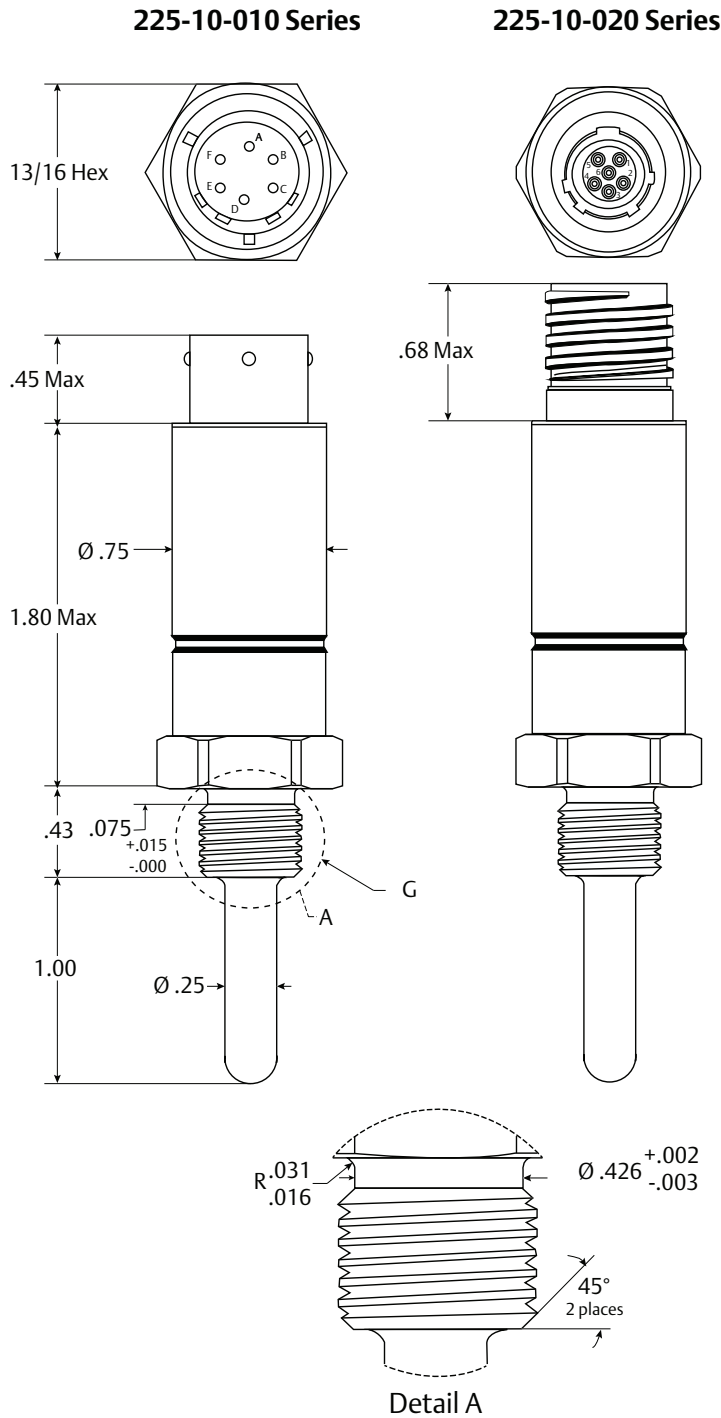

## 225-10-010 Series

Connections	
PIN	Function
A	Power in
B	RS-485 "B" <sup>(1)</sup>
C	RS-485 "A" <sup>(1)</sup>
D	Power return
E	COMM RTN <sup>(2)</sup>
F	Do not connect

1. Per TIA-485-A
2. Communication return is required.

## 225-10-020 Series

Connections	
PIN	Function
1	Power in
2	RS-485 "B" <sup>(1)</sup>
3	RS-485 "A" <sup>(1)</sup>
4	Power return
5	Sleep
6	Do not connect

1. Per TIA-485-A




A-F. See Connections Table  
 G. 1/2 UNF 3A thread  
 Dimensions are in inches.


This page is intentionally left blank.

**Rosemount Specialty Product LLC**

**Emerson Process Management**


5545 Nelpar Drive  
East Wenatchee, WA 98822, USA


 +1 509 881 2100  
 +1 509 881 2115  
 Paine.Products@Emerson.com

 [Linkedin.com/company/Emerson-Process-Management](https://www.linkedin.com/company/Emerson-Process-Management)

 [Twitter.com/Rosemount\\_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://Youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://Google.com/+RosemountMeasurement)

Standard Terms and Conditions of Sale can be found at:  
[www.Emerson.com/en-us/pages/Terms-of-Use.aspx](http://www.Emerson.com/en-us/pages/Terms-of-Use.aspx)

Modbus is a registered trademark of Gould Inc.

The Emerson logo is a trademark and service mark of Emerson Electric Co.

The Paine brand and Paine logotype are trademarks of Emerson Electric Co.

All other marks are the property of their respective owners.

© 2016 Emerson Process Management. All rights reserved.