
Mimic[™] Simulation Software

- Improve control performance
- Improve operator performance
- Support cost effective compliance
- Reduce risk of plant operations
- Scalable, flexible model fidelity
- Easy integration
- Comprehensive Operator Training
- Realize lifecycle business results with low total installed cost

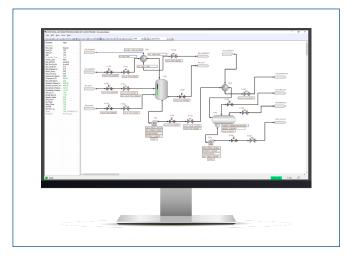

Introduction

Mimic[™] Simulation Software is a real-time, dynamic simulation platform built to deliver the business results of the Digital Twin to the process industries. It is a key technology towards top quartile performance.

Simulation must be a practical investment for any operations manager to make, regardless of the size of the plant or the industry. It must allow plant operations to reduce the cost and risk of improving the operation and control of the plant and support upskilling of the work force. Mimic provides value to the execution of capital projects and control system modernization as well as the lifecycle operation performance of the plant.

Benefits

Improve Control Performance – Mimic provides an environment for process control improvement while reducing the risks and errors in new and existing control system configurations.

Improve Operator Performance – Improve the performance of your operators by allowing training on startup, shutdown, abnormal situations, and infrequent plant upsets. In addition, operator training with Mimic can accelerate new operator skill development and facilitate knowledge transfer from experienced operators to inexperienced operators.

Support Cost Effective Compliance – Mimic minimizes costs associated with compliance by allowing control system and operating procedure validation without impacting the operation of the actual plant.

Reduce Risk of Plant Operations – Mimic's ability to test process safety levels of protection and other operational tasks in an off-line environment reduces the risks associated with running the real-world plant.



Scalable, Flexible Model Fidelity – From low to medium to high, all Mimic models provide the best real-time performance in the industry. This unique capability in Mimic allows you to apply the required level of model complexity to fit the requirements of the unit operation or task.

Easy Integration – Mimic automatically integrates to DeltaV[™] and other control system simulators. Mimic's Simulated IO Drivers integrate signals from the IO and process models to control systems using the communication standards required by the control system vendor. One modeling environment can drive IO signals to different control systems at the same time. Setup and integration time is minimized with utilities in Mimic that read the control system configuration and generate the Simulated IO relationship and IO models automatically.

Comprehensive Operator Training – Mimic Train works with process and IO models in a dynamic simulation system, adding the capability of operator training exercises and instructor controls. It functions as a supervisory manager of the training session allowing complete access and control of the Mimic Simulation and any OPC DA-compatible off-line control system.

Product Description


Mimic Foundation is the base license for building, managing and controlling the digital twin environment.

Mimic Explorer

Mimic Explorer allows complete management of the simulation environment from one window. From here, all aspects of the simulation can be configured. It is designed to display the simulation in a hierarchical tree structure, allowing you to better visualize the entire virtual plant. Menus within Mimic Explorer allow quick access to other applications in the Mimic software environment.

- Structured import/export of components
- Integrated support notifications
- Version control for simulation models
- Process snapshot control and validation

Mimic allows simultaneous user sessions using MS Server Remote Desktop Services.



Mimic Explorer - one window to the entire simulation environment.

Mimic Simulation Studio

Simulation Studio is the Mimic model and simulation configuration layer. It provides an IEC 1131 based graphical block view of the simulated process, allowing users to configure models, download models into the runtime engine, and to view the model data flow in real-time. Process models can also be configured in Graphical Mode, a dynamic PFD format. It also allows offline and online viewing of all models. Unit conversions between blocks are automatically calculated by the Mimic Simulation Engine, reducing model development and maintenance time. Links between Mimic models are cross referenced and displayed at each block, making models easy to understand and maintain.

Mimic User Views

Mimic User Views are user configurable views of dynamic Mimic or OPC DA data. Views contain graphs and tabular views of model data as well as graphics of the simulation. These objects are used to view the simulation in the following different ways:

- Data View Tabular views of simulated IO or process model data.
- Trend View Dynamic trends of data from Mimic or external OPC DA server.
- Graphic View Dynamic process flow diagrams of data from Mimic and OPC DA Server for instructor station screens.
- Unit Operation Views Dynamic view of unit operations: Column/Stripper View, Separator View, Reactor View, Pump/Compressor View, Bioreactor View, Fractionator View.

8	Block View : Simple Practicinator - PLANT_SS(A_SCA3-16-PD-006-607)(D-1601 24 — 🗆 🗙
Trend Control	
Pause Potting Trend Plotting	Bote Characterization A tradit fraging source in the second source in the
Available Trends	Tray State - Tray 1 State - Tray 1 State - Tray 2 Hydraulics - Profile Hydraulics - Tray 1 Hydraulics - Tray 2 Hydraulics - Tr
Tray State ^ Teopositive brutle * Tray 1 State * Tray 2 State * Tray 5 State * Tray 6 State * Tray 6 State *	2 Tary Pessue +
Hydraulics ^ Pressure Profile Tray 1 Hydraulos Tray 2 Hydraulos Tray 3 Hydraulos Tray 5 Hydraulos Tray 5 Hydraulos	9133
Tray 6 Hrydraulics Tray 7 Hrydraulics Tray 8 Hrydraulics Tray 9 Hrydraulics Tray 10 Hrydraulics Holdups	Tay (Floency + 113 114 114 114 114 114 114 114 114 114
Holdup Profile	Pen Color Pen Target Value Unit Last Update

Mimic Trend View showing batch profiles for viable cell and product concentration in the Fractionator Object.

Mimic External Model Interface (MEMI)

The Mimic External Model Interface (MEMI) allows external models access to the Mimic modeling environment.

Every Mimic system has an OPC DA Server available for complete access to Mimic models and snapshot controls. For higher speed, direct access to Mimic Models, MEMI provides a set of direct, data access functions implemented within a DLL. External modeling applications can use these functions to gain real-time, high-speed, read/write access to the Mimic model data.

Model Version Control


The Model Version Control feature keeps track of models and system enhancements, allowing you to archive, restore and view revisions of all process models. It also enables you to maintain an audit trail of model enhancements. A database backup will contain the revision history and content files.

Additional Software Features

Mimic Process

Mimic Process Modeling Objects are a set of rigorous first-principles, dynamic models of process plant unit operations designed for high-performance simulations for operator training or automation system testing.

- Powerful data visualization tools
- Easy to implement, quick to tune
- Rigorous First Principles Unit Operation Models
- IEC 1131 Function Block objects
- Dynamic Objects with Real Time Convergence
- Unit Operations links with process Streams
- Thermodynamic Properties validated to NIST and DIPPR
- Component Sets Streams Management
- Automatic Engineering Unit Handling
- Dynamic Pressure / Flow Solver
- User Views for Process Analysis
- IEC 1120 Function Block Objects of Dynamic PFD Objects



High Fidelity distillation column simulation in Mimic Simulation Studio.

The Mimic Process licensing packages are scalable to the needs of your system:

- Mimic Process Core Mimic Process Modeling Objects provides the infrastructure for Mimic Process as well as common unit operations including Bins, Compressors, Conveyers, Heat Exchangers, Pumps, Valves, and Vessels.
- Mimic Process Power Includes Boiler, Steam Header, Furnace, and Turbine unit operations.
- Mimic Process Separations Includes Separator, Vessel VLE, Surface Condenser, Jet Condenser, Distillation Column, Stripper, and Fractionator unit operations.
- Mimic Process Solids Includes Conveyer, Compactor, Crusher, Cyclone, Mill, Screen, Centrifuge Decanter, Flotation Cell, and Settling Tank unit operations.
- Mimic Process Reactions Includes Continuous Stir Tank Reactor and Plug Flow Reactor unit operations.
- Mimic Process Bioreactor Includes Bioreactor unit operation.

Mimic Train

Mimic Train is a Comprehensive Training Management and Administration Software for Mimic Simulation Software. It requires a Mimic Foundation license. Mimic Foundation provides integration and execution of the dynamic simulation of the process running in Mimic Process or an external modelling platform such as AspenTech HYSYS Dynamics.

Mimic Train Core Components Includes:

- Training Courses includes operator training exercises, views, scoring, and records.
- State Based Training Engine executes the training exercises.
- Default & Custom Malfunctions directly linked to the IO or Mimic modeling objects.
- Key Performance Indicator Scoring critical process data points against which the student's performance can be evaluated.

- Mimic Train Records & Reports a record of each exercise that is executed that can be exported to LMS.
- **Custom Interfaces** Mimic user types: Engineer, Instructor, Student.
- Mimic Train Views additional graphical, interactive resources such as Remote access to DeltaV control systems, Component Studio Graphics, Remote Desktop, PDFs, web links, and online resources.
- Mimic Playback record, playback, pause, and resume the actions taken during a training scenario to identify critical actions taken by a student to reinforce learning opportunities that drive key performance indicators.

Mimic Test Bench

Mimic Test Bench provides a way to automate Instrument, Control, and Safety System (ICSS) configuration testing and document the testing of these systems. Users can create a test to set, examine, verify, and monitor values in both their Mimic simulation and any offline control system with an OPC DA server, like DeltaV Simulate.

Mimic HYSYS Link

The Mimic HYSYS Link allows direct integration of HYSYS Dynamics models into Mimic, allowing those models to be used for control system development and testing, operator training, and continual improvements and OPEx initiatives.

Built upon the proven communication bridge architecture in Mimic, the HYSYS Link provides:

- Movement of IO data between Mimic and DeltaV Simulate or other control systems simulators.
- Support for multiple HYSYS cases in a single machine or across multiple machines.
- Synchronization of variables between cases in the same machine or across several machines.
- Synchronization of execution for multiple cases in the same machine.
- Pause and resume the models and external systems.
- Running the models and external systems at speeds other than real-time.
- Ability to create, store, and restore snapshot.

Mimic Synchronize

Mimic Synchronize provides the tools needed to maintain your Digital Twin more easily with DeltaV and Mimic. Mimic Synchronize allows DeltaV power users to keep DeltaV Simulate and production DeltaV systems aligned, ensuring the maximum return from your Multi-Purpose Dynamic Simulation (MPDS) system or Operator Training System (OTS).

Mimic Synchronize enables users to:

- Efficiently update DeltaV Snapshots.
- Perform rule-based verification of changes and updates.
- Logging of every step and parameter processed for simplified MOC.

Mimic System Capacities

Below are configuration capacity limits in Mimic.

- Simulated IO Tags Per System 1000 and greater (1000 SIO Tags Increments).
- Runtime Simulation Nodes Per System 64.
- Defined Simulation Nodes Per System no limit.
- Simulated IO Tags Per Node 40,000.
- Remote Terminal Sessions for Mimic Server 10.

Operating System	Microsoft Windows 10; Microsoft Windows Server 2016, 2019, or 2022
CPU	x86 2.5 GHz dual-core CPU
Memory	Minimum 4GB
Disk Space	10 GB free space before installing Mimic

Specifications

Ordering Information

Mimic Simulation Software is licensed on a Flexible Subscription Unit (FSU) basis. An FSU is a currency that can be used to access any Mimic feature licensed on an FSU basis, with each feature requiring its own number of FSUs. The FSU subscription is offered in one-year, three-year, and five-year terms. To purchase, extend, or expand a license, please contact your Emerson Sales Representative.

©2024, Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while diligent efforts were made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

EMERSON

Contact Us www.emerson.com/contactus