


LNG Plant Implements Fisher™ JT Control Valve to Improve MCHE Performance

RESULTS

- Improved MCHE cool down operation
- Reduced operator load and vigilance to manage plant
- Realized maximum licenser controller benefits
- Ability to run Master Rate LNG Controller in Full Cascade
- Precise controllability, valve response with signal change

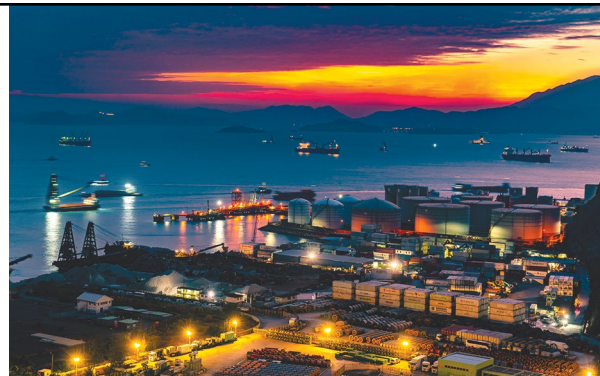

APPLICATION

The Joule-Thomson effect is leveraged throughout all of the primary liquefaction processes to achieve cooling of the feed gas or the refrigerant streams. It is used to achieve cooling of liquids, gases, or multi-phase fluids. This effect is facilitated by a control valve that reduces the pressure of the fluid significantly and induces the desired cooling. The Joule-Thomson (JT) control valve provides mixed refrigerant (MR) spray on the different sections of the main cryogenic heat exchanger (MCHE). It controls the flow of the MR through the bundles of the MCHE and takes majority of pressure drop.

CUSTOMER

Large natural gas producer in Europe

CHALLENGE

The producer was experiencing LNG production rate loss due to the poor regulation by the JT control valves in the plant. Due to this, the MCHE was running sub-optimally and maximum licenser controller benefits couldn't be realized. When the MCHE ran manually, it resulted in higher operator load and vigilance to manage the plant, increasing the possibility of human error that the operator couldn't practically manage under all scenarios.

Due to poor regulation of the JT control valve, the MCHE cool down was done in manual mode, increasing the cool down time and impacting the LNG throughput of the plant.

I am satisfied with the demonstrated performance of special Fisher JT control valves. A very impressive performance from Emerson.

**Head of Instrumentation Department,
LNG Plant**



Fisher NPS 16 EWT-C JT control valve

For more information:
www.Fisher.com
www.Emerson.com/LNGvalves

FISHER™


EMERSON™

SOLUTION

The LNG producer chose Emerson to provide a special Fisher JT control valve. An NPS 16 Fisher EWT-C cryogenic globe valve with a Fisher™ Whisper Trim™ cage was offered because the Joule-Thomson application was experiencing outgassing and vibration. To achieve precise controllability, a low-friction cryogenic seal and high performance actuator were added. An optimized digital valve (ODV) tier Fisher™ FIELDVUE™ DVC6200 digital valve controller was chosen. It underwent special dynamic performance testing at cryogenic temperature (-196° C) to ensure 0.08% deadband and hysteresis.

This special Fisher JT control valve was built and tested to ensure optimal performance at real cryogenic temperatures (-196° C).

The Fisher JT control valve's performance according to special requirements of MCHE controller algorithm was very impressive and outstanding.

Instrument Engineer, LNG Plant

RESOURCES

Our LNG valve solutions: [Emerson.com/LNGValves](https://www.emerson.com/LNGValves)

Listen to the Podcast of this Proven Result
on the Emerson Automation Experts Podcast

Unlocking LNG Success: How a Fisher JT Valve Supercharged a Main Cryogenic Heat Exchanger

[Listen to Podcast ►](#)



<http://www.Facebook.com/FisherValves>



<http://www.YouTube.com/user/FisherControlValve>



<http://www.Twitter.com/FisherValves>



<http://www.Linkedin.com/groups/Fisher-3941826>

Emerson

Marshalltown, Iowa 50158 USA
Sorocaba, 18087 Brazil
Cernay, 68700 France
Dubai, United Arab Emirates
Singapore 128461 Singapore

D104733X02 © 2022, 2024 Fisher Controls International LLC. All rights reserved. The Emerson logo is a trademark and service mark of Emerson Electric Co. Fisher, Whisper Trim, and FIELDVUE are each a mark of an entity in the Emerson family of businesses. All other marks are the property of their respective owners.

Neither Emerson nor any of its affiliated entities assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

For more information:

www.Fisher.com

www.Emerson.com/LNGvalves

FISHER™

