


Rosemount 975UF

Ultra Fast Ultraviolet Infrared Flame Detector

The Rosemount 975 ultra fast ultraviolet infrared flame detector is designed to meet two major requirements:

- High-Speed Response (20 msec)
- High Reliability (immunity to false alarm)

The Rosemount 975UF ultra fast ultraviolet infrared flame detector can detect hydrocarbon-based fuel and gas fires, hydroxyl and hydrogen fires, as well as metal and inorganic fires. The UV/IR flame detector senses radiant energy in the short wave section of both the ultraviolet and infrared portions of the electromagnetic spectrum. The signals from both sensors are analyzed for frequency, intensity and duration. Simultaneous detection of radiant energy in both the UV and IR sensors triggers an alarm signal. The UV sensor incorporates a special logic circuit that helps prevent false alarms caused by solar radiation.

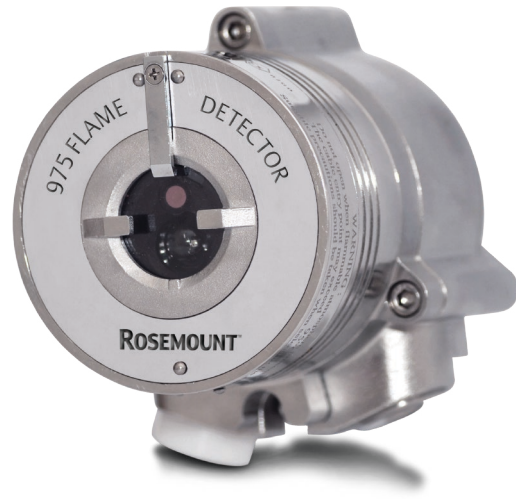

Rosemount 975UF Ultra Fast Ultraviolet Infrared Flame Detector.

Features & Benefits

- UV/IR dual-sensor
- High-speed response - 20 msec to flash fire
- Solar blind
- Automatic Built-In-Test (BIT) - to assure continued reliable operation
- Heated window - for operation in harsh weather conditions (snow, ice, condensation)
- Multiple output options for maximum flexibility and compatibility
 - Relays (3) for alarm, fault, and auxiliary
 - Analog output for fast detection
 - 0–20 mA (stepped)
 - HART® Protocol for maintenance and asset management
 - RS 485, Modbus compatible
- High reliability - MTBF - minimum 150,000 hours
- Approved to Safety Integrity Level 2 (SIL 2 - TÜV)
- 5 year warranty
- User programmable via HART® or RS-485

Applications (model dependent)

- Explosives and Ammunition
- Offshore Oil & Gas
- Onshore Oil & Gas
- Petrochemical plants
- Storage tank farms
- Aircraft hangars
- Chemical plants
- Power generation facilities
- Pharmaceutical industry
- Printing industry
- Warehouses
- Automotive industry
- Waste disposal facilities
- Aerospace industry
- Hydrogen Fuel Cell industry
- Hydrogen Vehicle Parking & Refueling
- Battery Charging Areas
- Refinery Hydrogenation
- Space Industry Hydroxyl Propellant
- Static Fuel Cell Systems

Specifications


Table 1 - Rosemount 975UF Ultra Fast Ultraviolet Infrared Flame Detector

General Specifications						
Spectral Response	UV: 0.185–0.260 μm; IR: 2.5–3.0 μm					
Detection Range (at highest Sensitivity Setting for 1 ft ² (0.1 m ²) pan fire)	Fuel	ft / m	Fuel	ft / m	Fuel	ft / m
	n-Heptane	66 / 20	Ethanol	25 / 7.5	LPG*	43 / 13
	Gasoline	66 / 20	Methanol	26 / 8	Polypropylene Pellets	43 / 13
	Diesel Fuel	49 / 15	IPA (Isopropyl Alcohol)	43 / 13	Ammonia**	20 / 6
	JP5	50 / 15	Hydrogen*	37 / 11	Silane**	6 / 1.8
	Kerosene	50 / 15	Methane*	26 / 8	Office Paper	16 / 5
	*30" (0.75 m) high, 10" (0.25 m) width plume fire					
	**20" (0.5 m) high, 8" (0.2 m) width plume fire					
Response Time	Typically 3 s. High speed 20 msec to flash fire					
Adjustable Time Delay	Up to 30 s					
Field of View	Horizontal 100°; Vertical 95°					
Built-in-Test (BIT)	Automatic					
Temperature Range	Operating: -67 °F to +167 °F (-55 °C to +75 °C) Option: -67 °F to +185 °F (-55 °C to +85 °C) Storage: -67 °F to +185 °F (-55 °C to +85 °C)					
Humidity	Up to 95 % non-condensing (withstands up to 100 % RH for short periods)					
Heated Optics	To eliminate condensation and icing on the window					
Electrical Specifications						
Operating Voltage	24 VDC nominal (18–32 VDC)					
Power Consumption	Standby: Max. 90 mA (110 mA with heated window) Alarm: Max. 130 mA (160 mA with heated window)					
Cable Entries	2 x ¾" - 14 NPT conduits or 2 x M25 x 1.5 mm ISO					
Wiring	12–22 AWG (0.3 mm ² –2.5 mm ²)					
Electrical Input Protection	According to MIL-STD-1275B					
Electromagnetic Compatibility	EMI/RFI protected to EN 61326-3 and EN 61000-6-3					
Electrical Interface	The detector includes twelve (12) terminals with five (5) wiring options (factory set)					
Outputs						
Relays	Alarm, Fault, and Auxiliary SPST volt-free contacts rated 2 A at 30 VDC					
Analog Output	4–4.7 V at detection					
0–20 mA (stepped)	Sink (source option) configuration					
	Fault: 0 + 1 mA		IR: 8 mA ± 5 %		Alarm: 20 mA ± 5 %	
	BIT Fault: 2 mA ± 10 %		UV: 12 mA ± 5 %		Resistance Loop: 100–600 Ω	
	Normal: 4 mA ± 10 %		Warning: 16 mA ± 5 %			
HART® Protocol	Optional HART® communications on the 0–20 mA analog current (FSK) - used for maintenance, configuration changes and asset management, available in mA source output wiring options					
RS-485	RS-485 Modbus compatible communication link that can be used in computer controlled installations					
Mechanical Specifications						
Materials	- Stainless Steel 316L with electro polish finish - Heavy duty copper free aluminum (less than 1 %), red epoxy enamel finish (not available in FM version)					
Enclosure options						
Mounting	Stainless Steel 316L with electro polish finish					
Dimensions	Detector 4" x 4.6" x 6.18" (101.6 x 117 x 157 mm)					
Weight	Detector (stainless steel)		6.1 lb		(2.8 kg)	
	Detector (aluminum)		2.8 lb		(1.3 kg)	
	Tilt mount		2.2 lb		(1.0 kg)	
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical Shock, High Temp, Low Temp					
Water and Dust	IP66 and IP67 per EN 60529, NEMA 250 6P					

Approvals	
Hazardous Area	<p>ATEX and IECEx Ex II 2 G D Ex d e IIC T5 Gb Ex tb IIIC T96 °C Db (-55 °C ≤ Ta ≤ +75 °C) Ex tD A21 IP66/X7 T 95 °C</p> <p>FM/FMC/CSA Class I Div. 1, Groups B, C, & D Class II/III Div.1, Groups E, F & G</p> <p>Ex d e IIC T4 Gb Ex tb IIIC T106 °C Db (-55 °C ≤ Ta ≤ +85 °C)</p>
Performance	EN 54-10 (VdS) FM 3260
Reliability	IEC 61508 - SIL 2 (TÜV)

Accessories	
Flame Simulator Kit	00975-9000-0010
Tilt Mount	00975-9000-0001
Duct Mount	00975-9000-0002
U-Bolt/Pole Mount	00975-9000-0007 (2" pole) 00975-9000-0008 (3" pole)
USB RS-485 Harness Kit	00975-9000-0011
Weather Protector	Plastic: 00975-9000-0003 Stainless Steel: 00975-9000-0004
Air Shield	00975-9000-0005
Cone Viewer Kit	00975-9000-0006

www.Emerson.com/RosemountFlameGasDetection

 [YouTube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 Analyticexpert.com

 [Twitter.com/Rosemount_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

Americas

Emerson Automation Solutions

6021 Innovation Blvd.
Shakopee, MN 55379
USA

T + 1 866 347 3427

F + 1 952 949 7001

Safety.CSC@Emerson.com

Europe

Emerson Automation Solutions AG

Neuhofstrasse 19a P.O. Box 1046
CH-6340 Baar
Switzerland

T + 41 (0) 41 768 6111

F + 41 (0) 41 768 6300

Safety.CSC@Emerson.com

Middle East & Asia

Emerson Automation Solutions

Emerson FZE
Jebel Ali Free Zone
Dubai, UAE
P.O. Box 17033

T + 971 4 811 8100

F + 971 4 886 5465

Safety.CSC@Emerson.com

Asia Pacific

Emerson Automation Solutions

1 Pandan Crescent
Singapore 128461
Singapore

T + 65 777 8211

F + 65 777 0947

Safety.CSC@Emerson.com

©2017 Emerson Automation Solutions. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.