

## Transmitter

### Technical data

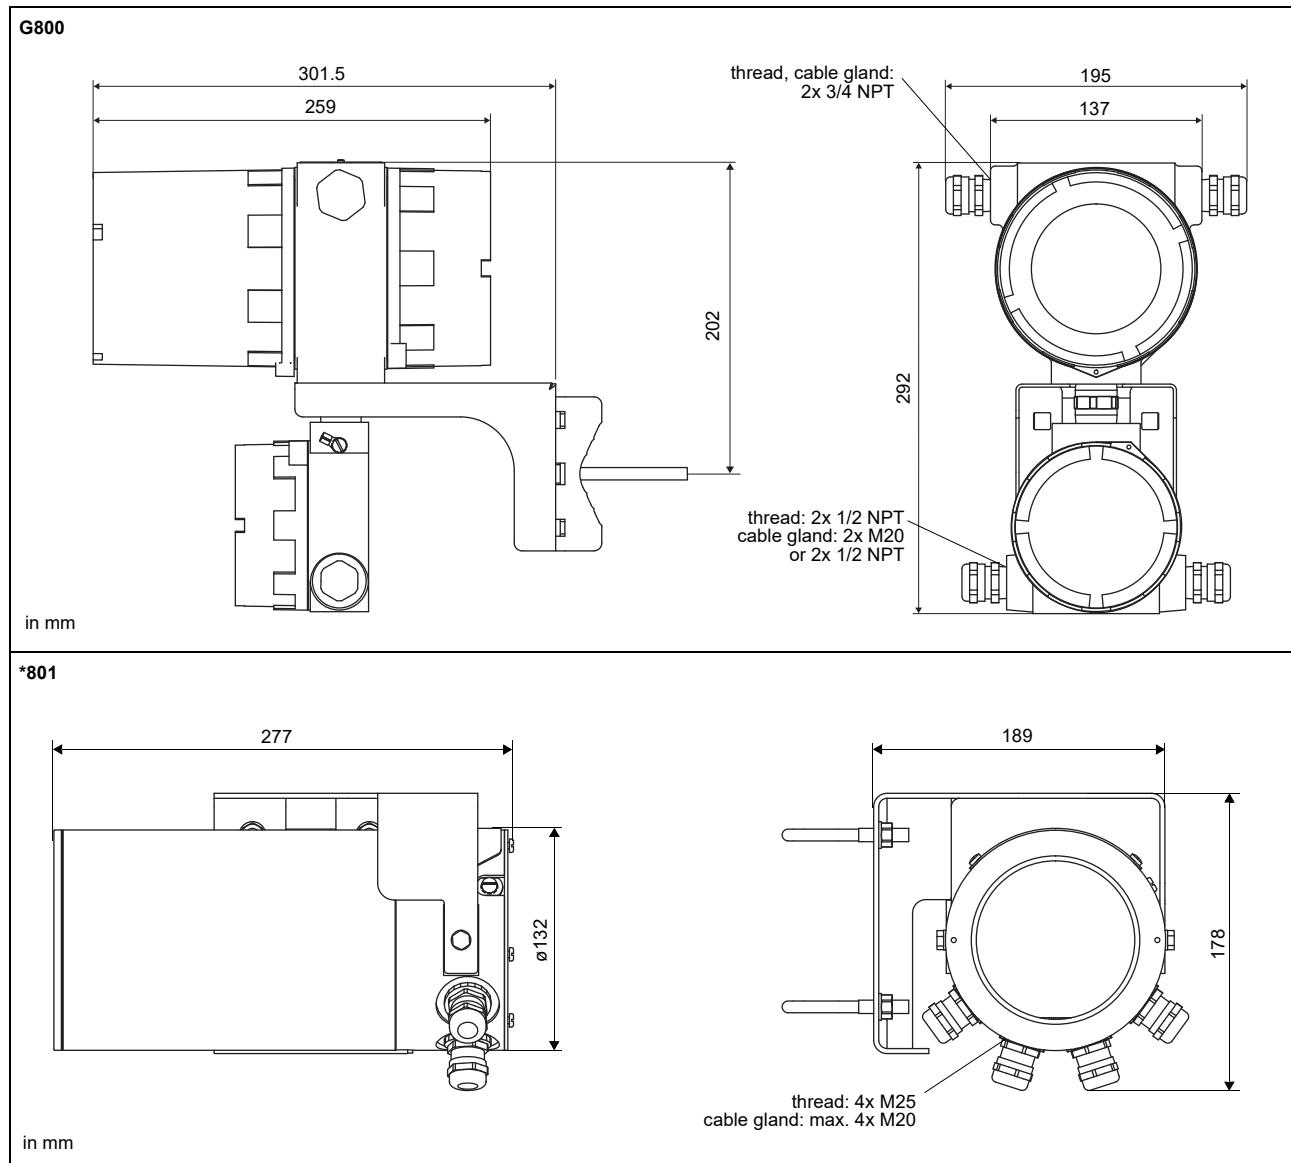
		<b>FLUXUS G800SR-A1</b>	<b>FLUXUS G801SR-A1</b>
			
design		explosion proof field device zone 1 SIL2	explosion proof offshore device zone 1 SIL2
supported transducer frequencies		F, G, H, K, M on request: P, Q	
<b>measurement</b>			
measurement principle		transit time difference correlation principle	
flow velocity	m/s	0.01...35, depending on pipe diameter	
repeatability		0.15 % of reading ±0.01 m/s	
fluid		all acoustically conductive gases, e.g. nitrogen, air, oxygen, hydrogen, argon, helium, ethylene, propane	
temperature compensation		corresponding to the recommendations in ANSI/ASME MFC-5.1-2011	
<b>measurement uncertainty</b>			
volumetric flow rate		±1...3 % of reading ±0.01 m/s depending on application ±0.5 % of reading ±0.01 m/s with field calibration	
<b>transmitter</b>			
power supply		• 100...230 V/50...60 Hz or • 20...32 V DC	
power consumption	W	<10	
number of measuring channels		1, optional: 2	
damping	s	0...100 (adjustable)	
measuring cycle	Hz	100...1000 (1 channel)	
response time	s	1 (1 channel), option: 0.07	
housing material		cast aluminum, powder coated	stainless steel 316/316L (1.4401, 1.4404, 1.4432)
degree of protection		IP66	
dimensions	mm	see dimensional drawing	
weight	kg	6	6.6
fixation		wall mounting, 2" pipe mounting	
ambient temperature	°C	-20...+60	-20...+50
display		2 x 16 characters, dot matrix, backlight	
menu language		English, German, French, Dutch, Spanish	
<b>explosion protection</b>			
• ATEX/IECEx			
marking		CE 0637 Ex II2G Ex db eb IIC T6 Gb Ta -20...+60 °C	CE 0637 Ex II2G II2D Ex db eb IIC T6 Gb Ex tb IIIC T100 °C Db Ta -20...+60 °C
certification ATEX		IBExU01ATEX1064	IBExU05ATEX1078
certification IECEx		-	IECEx IBE 12.0020

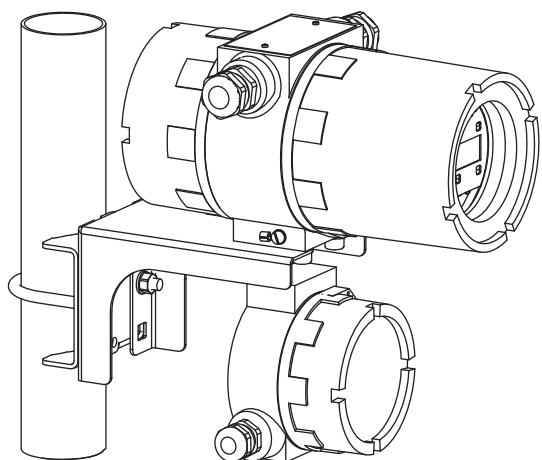
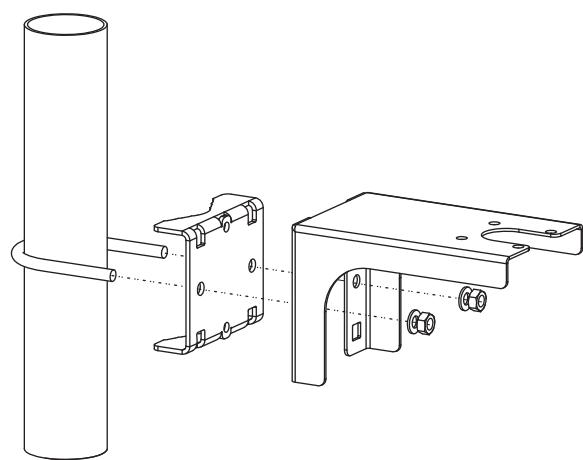
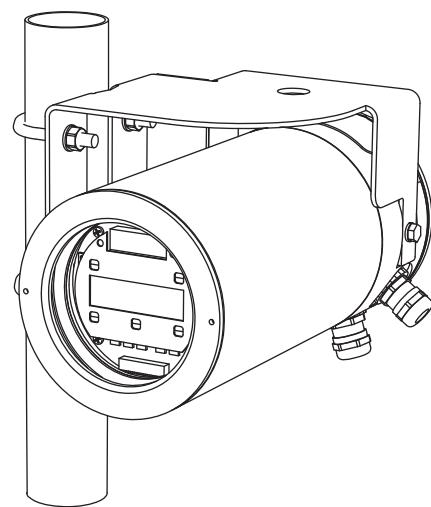
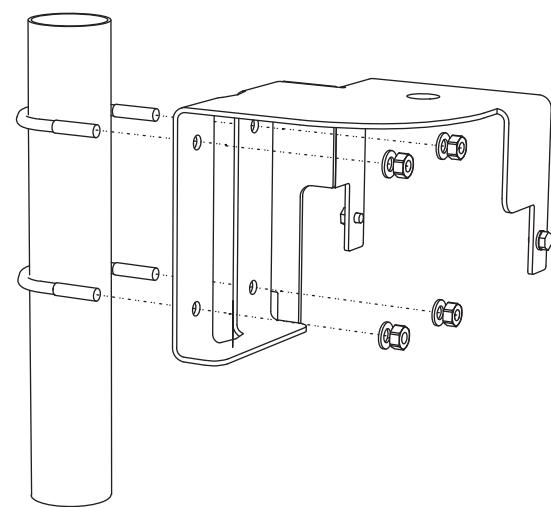
<sup>1</sup> connection of the interface RS232 outside of explosive atmosphere (housing cover open)

	FLUXUS G800SR-A1	FLUXUS G801SR-A1
<b>measuring functions</b>		
physical quantities	operating volumetric flow rate, standard volumetric flow rate, mass flow rate, flow velocity	
totalizer	volume, mass	
calculation functions	average, difference, sum (2 measuring channels necessary)	
diagnostic functions	sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times	
<b>communication interfaces</b>		
service interfaces	<ul style="list-style-type: none"> <li>• RS232<sup>1</sup></li> <li>• USB (with adapter)<sup>1</sup></li> </ul>	
<b>accessories</b>		
serial data kit	<ul style="list-style-type: none"> <li>• cable</li> <li>• adapter</li> </ul>	
	RS232	RS232 - USB
software	<ul style="list-style-type: none"> <li>• FluxDiagReader: download of measured values and parameters, graphical presentation</li> <li>• FluxDiag (optional): download of measurement data, graphical presentation, report generation</li> <li>• FluxSubstanceLoader: upload of fluid data sets</li> </ul>	
<b>data logger</b>		
loggable values	all physical quantities, totalized values and diagnostic values	
capacity	> 100 000 measured values	
<b>outputs</b>		
	The outputs are galvanically isolated from the transmitter.	
<b>• current output</b>		
number	2 (1 (SIL2), 1 (diagnosis))	
range	mA	0/4...20
accuracy	0.1 % of reading ±15 µA	
active output	$R_{ext} < 500 \Omega$	
<b>• binary output</b>		
number	0...2 (diagnosis)	
open collector	24 V/4 mA	
binary output as alarm output		
• functions	limit, change of flow direction or error	
binary output as pulse output		
• functions	mainly for totalizing	
• pulse value	units	0.01...1000
• pulse width	ms	1...1000

<sup>1</sup> connection of the interface RS232 outside of explosive atmosphere (housing cover open)


## Dimensions




**Wall and 2" pipe mounting kit****G800****\*801**

## Terminal assignment

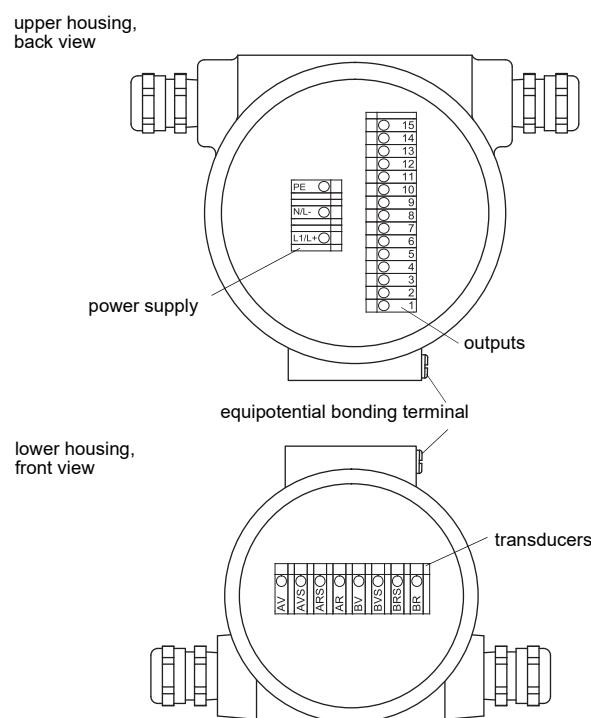G800



\*801

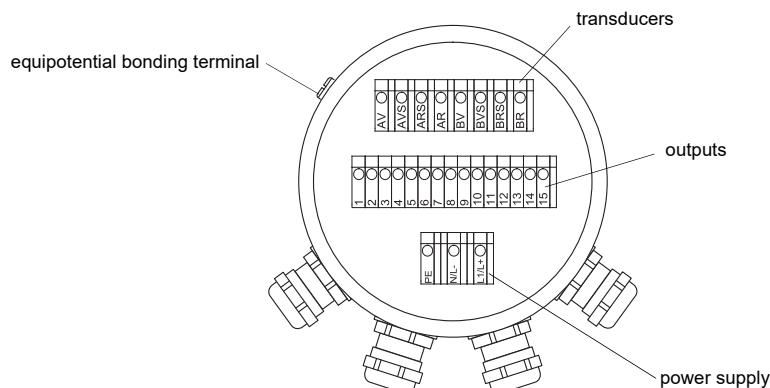

### power supply<sup>1</sup>

AC		DC	
terminal	connection	terminal	connection
L1	phase	L+	+
N	neutral	L-	-
PE	earth	PE	earth

### transducers, extension cable

measuring channel A		measuring channel B		transducer
terminal	connection	terminal	connection	
AV	signal	BV	signal	↑
AVS	internal shield	BVS	internal shield	
ARS	internal shield	BRS	internal shield	↗
AR	signal	BR	signal	
cable gland	external shield	cable gland	external shield	↑ ↗

### outputs<sup>1</sup>

terminal	connection
1(-), 2(+)	active current output I1
3(-), 4(+)	active current output I2
5(-), 6(+)	binary output B1 (open collector)
7(-), 8(+)	binary output B2 (open collector)

<sup>1</sup> cable (by customer): e.g. flexible leads, with insulated wire end ferrules, lead cross sectional area: 0.25...2.5 mm<sup>2</sup>