


Roxar™ 2600 Multiphase Flow Meter

with 5726 Multiphase Transmitter and Rapid Adaptive Measurement

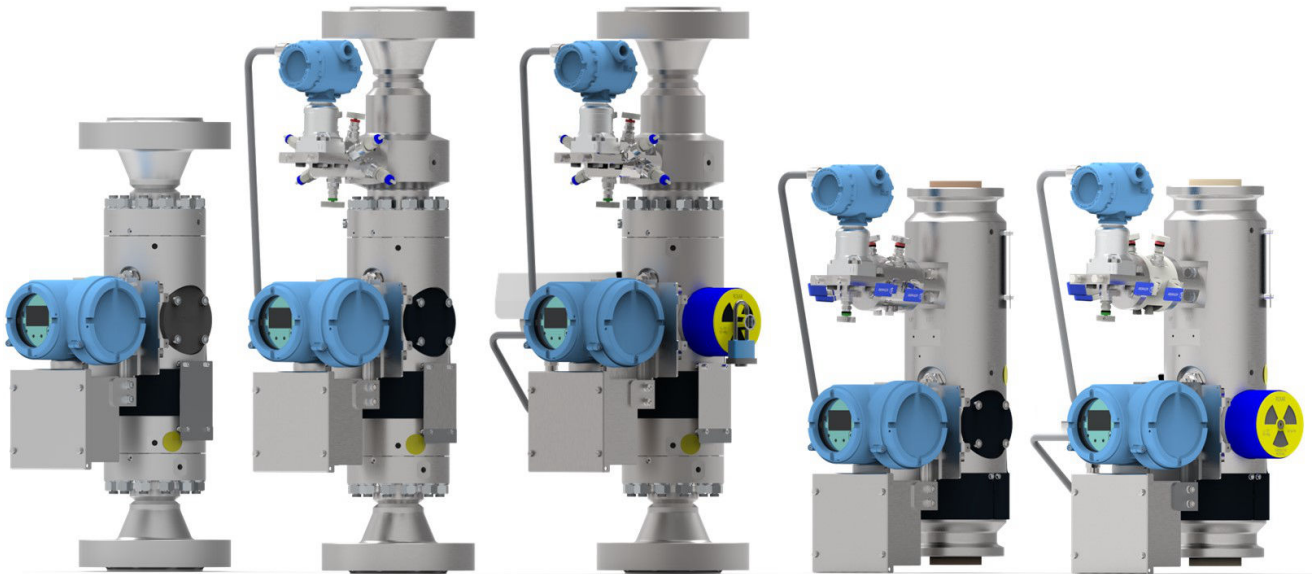

As oil and gas operators worldwide adjust their production methodologies and target more challenging reservoirs, the multiphase flow metering technology must be robust and reliable in ever more demanding conditions.

The Roxar 2600 Multiphase Flow Meter (MPFM) key features

- Real time, three-phase measurement without the need for separation
- Robust full-range non-gamma meter version available
- Flexible and adaptable configuration options throughout the lifetime of your field
- Roxar 5726 Multiphase Transmitter mounted directly onto the flow meter
- The Roxar Rapid Adaptive Measurement embedded software supporting automation and trustworthy measurement in dynamic multiphase flow
- Advanced self-diagnostic capabilities with alarms, trending graphics, layer compensation and automatic calibrations

- Intuitive and user-friendly operator interface tool for calibration, configuration, and operation
- Fully compatible with Roxar 2600 Multiphase Flow Meter Performance Monitoring, giving operators continuous access to Emerson expertise and support
- The Roxar Multiphase Salinity System (RMSS) available as an additional module, providing live salinity content information when operating in water-dominant flow

Roxar 2600 MPFM model options and specifications

For the latest information, refer to the [Roxar 2600 Multiphase Flow Meters](#) product page.

Model options

Emerson offers a modular approach to the Roxar 2600 Multiphase Flow Meter. This makes it possible for operators to select only the modules suitable for their application and measurement needs, fully confident changes can be made in the field if application needs change over time

Product variant	M	MV	MVG
Key raw data measurements	Base model – impedance measurement	M model plus dP over venturi measurement	MV model plus gamma density measurement
Application description	Single well applications Direct well head monitoring and trending of oil, water and gas fractions and rates	Single or multi-well applications Flow rates for oil, water and gas over a wide range of applications	Single or multi-well applications Flow rates for oil, water and gas over a full range of applications
Operating range	<ul style="list-style-type: none"> ▪ 0 - 85% gas volume fraction (GVF) ▪ 0 - 100% water liquid ratio (WLR) ▪ Flow velocity 5 - 25 m/s 	<ul style="list-style-type: none"> ▪ 0 - 100% GVF ▪ 0 - 100% WLR ▪ Flow velocity 2 - 40 m/s 	<ul style="list-style-type: none"> ▪ 0 - 100% GVF ▪ 0 - 100% WLR ▪ Flow velocity 1 - 40 m/s

Standards and certifications

Category	Standard or certification description
Hazardous area certification	ATEX IECEX cCSAus
Design code	ASME B16.5 & ASME B31.3
Material specification compliance	ASME B31.3
Sour service wetted parts	NACE MR 0175 ISO 15156

Mechanical specification

Category	Specification description
Installation	Vertical with upwards flow
Meter sizes	1½ inches (ID 35 mm) to 8 inches (ID 173 mm)
Design pressure	Up to 5,000 psi (345 bar)
Design temperature	-4 °F (-20 °C) to 266 °F (130 °C) Lower minimum temperatures can be accommodated; assessed on a case by case basis.
Meter body wetted parts material options	Duplex UNS S31803 Stainless steel UNS S31600 Super duplex UNS S32760 Inconel 625 UNS N06625 PEEK natural
Flange connection	ANSI flanges or hubs with clamp connectors
Density measurement (when applicable)	Compact gamma system Source: Cs-137, 2, 5 or 8.3 mCi Half-life 30.1 years

Communication and electrical specification

Category	Specification description
Power supply	18 - 30 VDC 100 - 240 VAC Power consumption: < 20 W
Communications interface	RS-485 Ethernet
Communications protocol	Modbus RTU Modbus TCP HTTPS OPC-UA
Roxar 5726 Multiphase Transmitter mounting and housing	Mounted directly on meter body Painted aluminum housing for hazardous area (Zone 0, 1 / Div 1) Stainless Steel 316L housing for hazardous area (Zone 0, 1 / Div 1)

Software features



The Roxar 2600 Multiphase Flow Meter comes with the Rapid Adaptive Measurement core software as standard. Several value-add features are available to optimize for application requirements.

"The Roxar 2600 Multiphase Flow Meter Performance Monitoring is also available, offering operators continuous access to Emerson's expertise and support.

	Features	Functionality
Standard	Core	One mode
		Adaptive density measurement
		Parallel computation
		Basic alarms and diagnostics
		Embedded PVT
Advanced	Advanced PVT	Multistage flashing
		Gas lift integration
	Detect and correct	Layer and blockage alarms
		Layer compensation
	Alarms and diagnostics	Advanced alarms
		Trending
	Non-gamma	Non-gamma one mode
	Connect	Performance monitoring

Product variant overview

Roxar 2600 MPFM MVG

 A vertical industrial flowmeter assembly with a grey main body, blue electrical enclosures, and a yellow radiation warning symbol on the side.	<p>Meter Sizes: 1½ inches (ID 35 mm) to 4 inches (ID 87 mm) Flange Connection: ANSI flanges Design Pressure: 3750 psi (258 bar)</p>
 A vertical industrial flowmeter assembly similar to the first, but with a larger central cylindrical component and a different flange connection design.	<p>Meter Sizes: 2 inches (ID 50 mm) to 8 inches (ID 173 mm) Flange Connection: Hubs with clamp connectors Design Pressure: 5000 psi (345 bar)</p>

Roxar 2600 MPFM MV



Meter Sizes: 1½ inches (ID 35 mm) to 4 inches (ID 87 mm)
Flange Connection: ANSI flanges
Design Pressure: 3750 psi (258 bar)



Meter Sizes: 2 inches (ID 50 mm) to 8 inches (ID 173 mm)
Flange Connection: Hubs with clamp connectors
Design Pressure: 5000 psi (345 bar)

Roxar 2600 MPFM M



Meter Sizes: 2 inches (ID 50 mm) and 3 inches (ID 67 mm)
Flange Connection: ANSI flanges
Design Pressure: 3750 psi (258 bar)

For more information: [Emerson.com/global](https://www.emerson.com/global)

©2025 Emerson. All rights reserved.

Emerson Terms and Conditions of Sale are available upon request. The Emerson logo is a trademark and service mark of Emerson Electric Co. Roxar is a mark of one of the Emerson family of companies. All other marks are property of their respective owners.

Roxar products are protected by patents. See under <http://www.emerson.com/en-us/automation/brands/roxar-home/roxar-patents> for details.

ROXAR™

